

Universal SCR Trigger Transformer



Model:KMB472-113

characteristics:

Applicable for triggering of SCR below 100A or IGBT pulse train.

Technical indicators:

- Installation method: PCB
- Flame resistance: UL94-V0
- Operating temperature: -20℃ ~ +50℃
- Storage temperature: -40℃ ~ +85℃
- Frequency range: 1KHz ~ 10KHz
- Dielectric strength: 3.5KV 50Hz 1min





Electrical parameters:


Vout microsecond integral	10	μvs
Pulse width (D=1:2)	0. 8	μs
Ratio	1 : 1	
Input amplitude	12	V
Output amplitude	≥ 10. 4	V
Load impedance	1	Ω
Leading edge time	≤ 100	μs
Main circuit operating voltage	220	V
Weight	10. 4	g

Dimensions (in mm) :

Connection diagram:

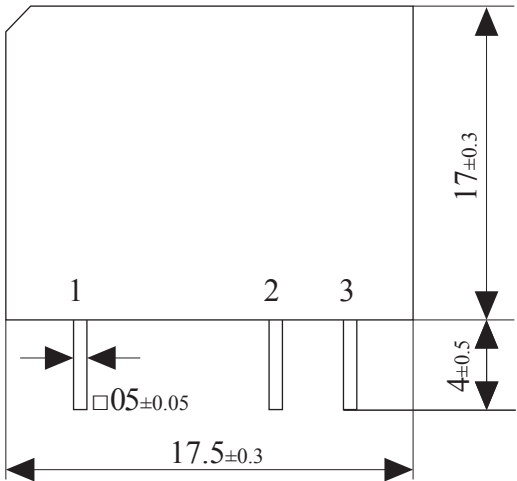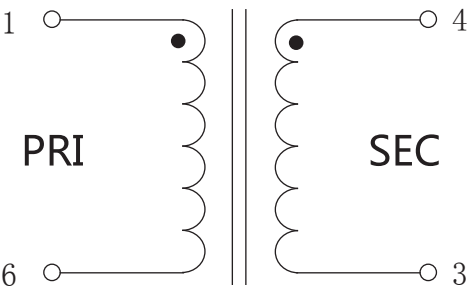

Front View

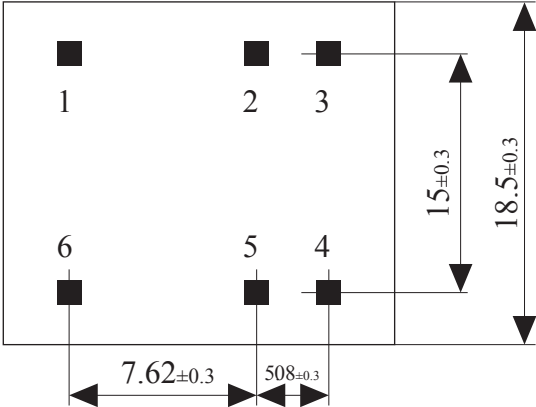

Bottom View