

Model:LKB4117-P

Characteristics:

Vacuum Epoxy Encapsulated, Sub-plate mount, Primary voltage: 110V/220V/230V (or producing as customized).



Technical Index:

Mounting type: Sub-plate mount

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C ~ +70°C

Work frequency: 50Hz ~ 60Hz


Dielectric strength: 3.75KV 50Hz 1min

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.2V	7.2V×2	833mA	416.5mA×2
7.5V	7.5V×2	9V	9V×2	666mA	333mA×2
9V	9V×2	10.8V	10.8V×2	555mA	277.5mA×2
12V	12V×2	14.5V	14.5V×2	416mA	208mA×2
15V	15V×2	18.1V	18.1V×2	333mA	166.5mA×2
18V	18V×2	21.7V	21.7V×2	277mA	138.5mA×2
24V	24V×2	28.9V	28.9V×2	208mA	104mA×2

Technical Parameters table:

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤18	%
Power	5	VA
Temperature rising	≤22	°C
No load loss	≤0.5	W
weight	200	g


Schematic Diagram:

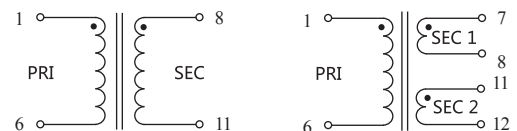


Single output

Double output

Dimension (in mm) :

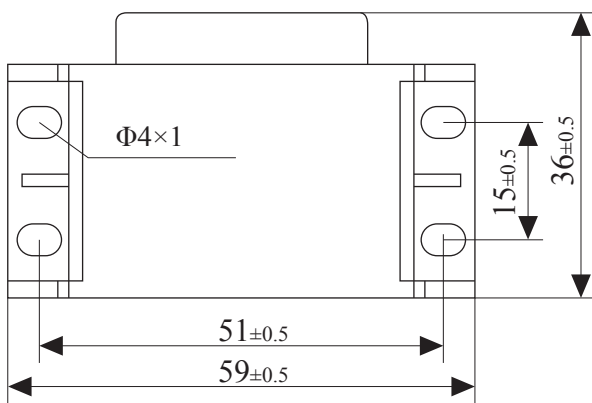

Top View

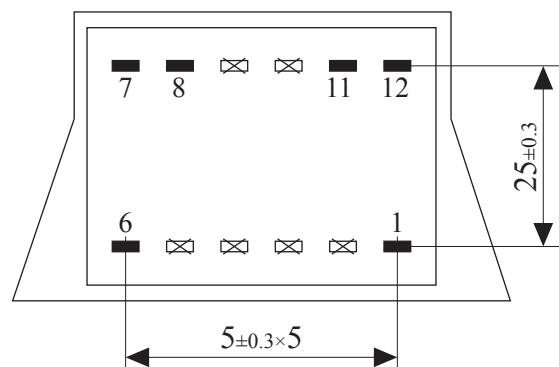

Front View