

Model:LKB8630-P

Characteristics:

- 1. Vacuum epoxy sealing, 100℃/6 hours high temperature aging, life span of 20 years, high electrical strength
- 2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
- 3.PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
- 4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof


Technical Index:

Technical Index: Sub-plate mount
Flame resistance : UL94-V0
Insulation class: B
Operation temperature: -30℃~+40℃
Work frequency: 50Hz~60Hz
Dielectric strength: Pri./Sec. 3.5KV 50Hz 1min 5mA,Sec/Sec 500V 50Hz 1min 5mA


Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤10	%
Power	100	VA
Temperature rising	≤40	℃
No load loss	≤3	W
weight	1800	g

Dimension（in mm）：

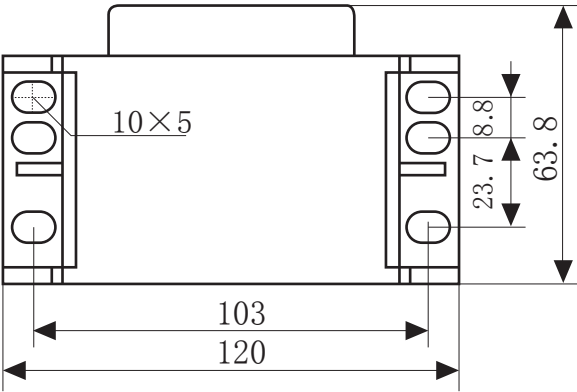

Bottom View

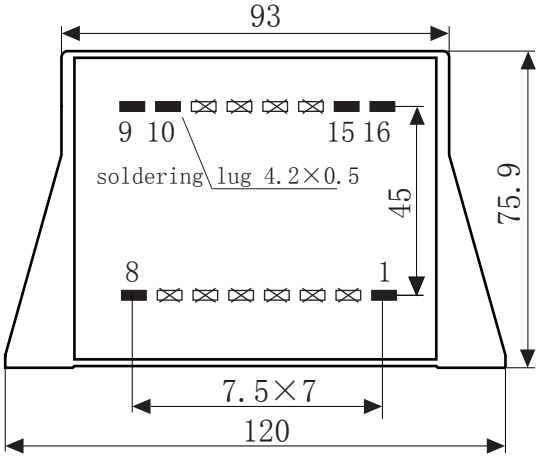

Front View

Product picture print for reference only,
subject to the actual product



Standard output parameters Table:

(Delivery is subject to full load voltage)

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
—	2×6V	—	2×6.7V	—	2×8.33A
—	2×7.5V	—	2×8.25V	—	2×6.66A
—	2×9V	—	2×9.9V	—	2×5.55A
12V	2×12V	13.2V	2×13.2V	8.33A	2×4.16A
15V	2×15V	16.5V	2×16.5V	6.66A	2×3.33A
18V	2×18V	19.8V	2×19.8V	5.55A	2×2.77A
24V	2×24V	26.4V	2×26.4V	4.16A	2×2.08A

Schematic Diagram:

