

Model:LKR4820-7.5-P

Characteristics:

Vacuum Epoxy Encapsulated, The fixed hole is 7.5mm away from the GND, Used for dashboard with screw inside installation
Soldering lug/Primary voltage: 110V/220V/230V(or producing as customerized).



Technical Index:


- Mounting type: Sub-plate mount
- Flame resistance : UL94-V0
- Insulation class: B
- Operation temperature: -30°C ~ +40°C
- Work frequency: 50Hz ~ 60Hz
- Dielectric strength: 3.75KV 50Hz 1min

Technical Parameters table:


Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤20	%
Power	12	VA
Temperature rising	≤25	°C
No load loss	≤0.9	W
weight	300	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.2V	7.2V×2	2A	1A×2
7.5V	7.5V×2	9.1V	9.1V×2	1.6A	0.8A×2
9V	9V×2	10.9V	10.9V×2	1.33A	0.66A×2
12V	12V×2	14.6V	14.6V×2	1A	0.5A×2
15V	15V×2	18.2V	18.2V×2	0.8A	0.4A×2
18V	18V×2	21.8V	21.8V×2	0.66A	0.33A×2
24V	24V×2	29V	29V×2	0.5A	0.25A×2


Schematic Diagram:

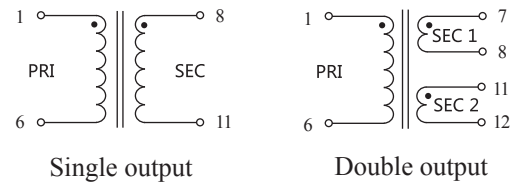

Dimension (in mm) :

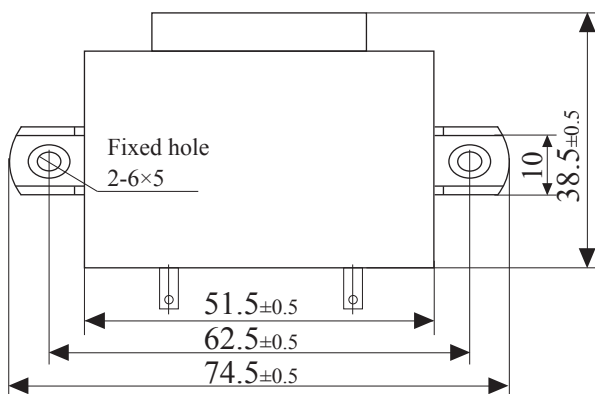

Top View

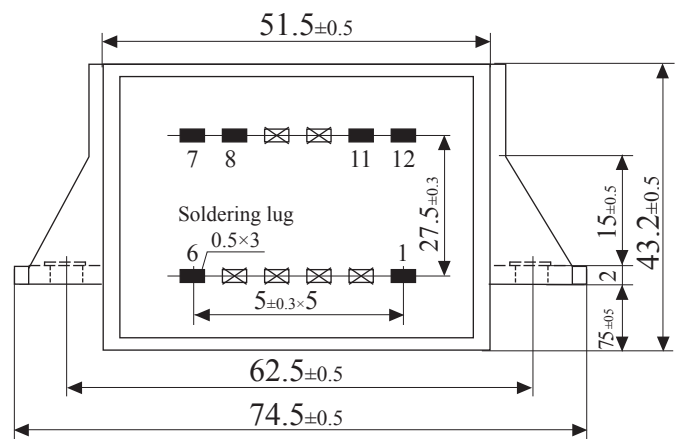

Side View