

# LTC series toroidal transformer



Model:LTC225

## Characteristics:

Vacuum epoxy encapsulated, small dimension,light weight,  
high efficiency,low noise,wide application,lead type output.  
Primary working voltage:230V(Can be customized according  
to customer's requirements)



## Technical index:


Installation method:Sub-plate mount  
Flame resistance:UL94-V0  
Insulation class:B grade  
Work temperature:-30°C~+40°C  
Frequency range:50Hz~60Hz  
Dielectric strength:P/S: 4.5KV AC

Secondary voltage	Secondary no load voltage	Secondary full load current
12V×2	13.1V×2	9.38A×2
15V×2	16.5V×2	7.50A×2
18V×2	19.7V×2	6.25A×2
22V×2	24.2V×2	5.11A×2
30V×2	32.8V×2	3.75A×2
55V×2	60V×2	2.05A×2


## Electrical data:

Primary working voltage	230	V
Output power	225	VA
No-load loss	16.5	W
Weight		g


## Connection diagram:

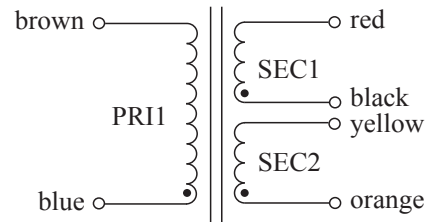

## Dimension(mm):

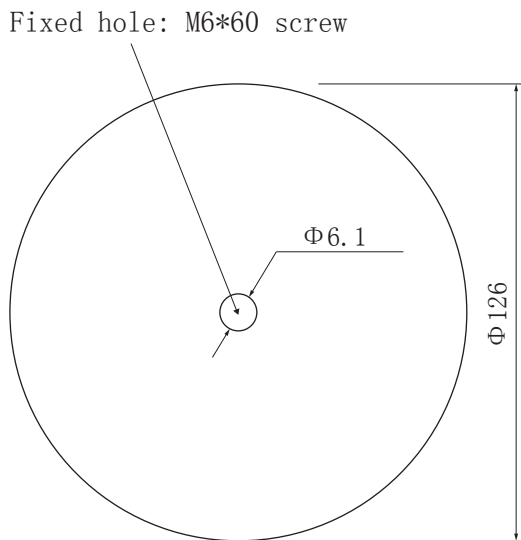

Front View

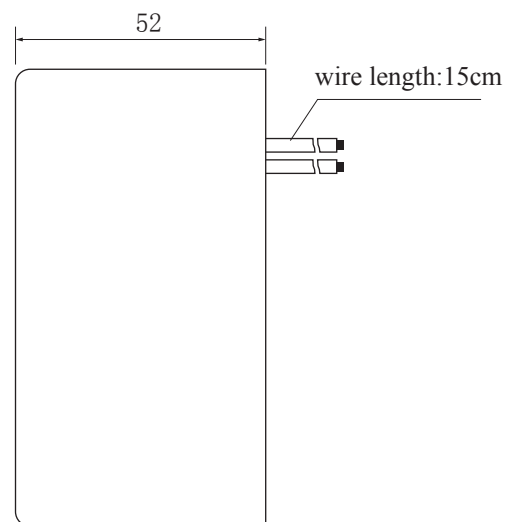

Side View