

LTC series toroidal transformer



Model:LTC300

Characteristics:

Vacuum epoxy encapsulated, small dimension,light weight,
high efficiency,low noise,wide application,lead type output.
Primary working voltage:230V(Can be customized according
to customer's requirements)



Technical index:


Installation method:Sub-plate mount
Flame resistance:UL94-V0
Insulation class:B grade
Work temperature:-30°C~+40°C
Frequency range:50Hz~60Hz
Dielectric strength:P/S: 4.5KV AC

Secondary voltage	Secondary no load voltage	Secondary full load current
12V×2	13.1V×2	12.5A×2
15V×2	16.5V×2	10.0A×2
18V×2	19.4V×2	8.33A×2
22V×2	23.8V×2	6.82A×2
30V×2	32.5V×2	5.00A×2
55V×2	59.6V×2	2.73A×2


Electrical data:

Primary working voltage	230	V
Output power	300	VA
No-load loss	17.8	W
Weight		g


Connection diagram:

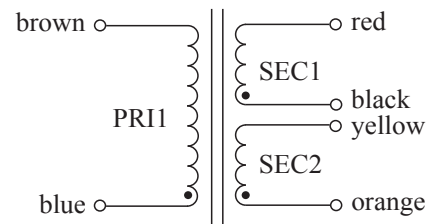

Dimension(mm):

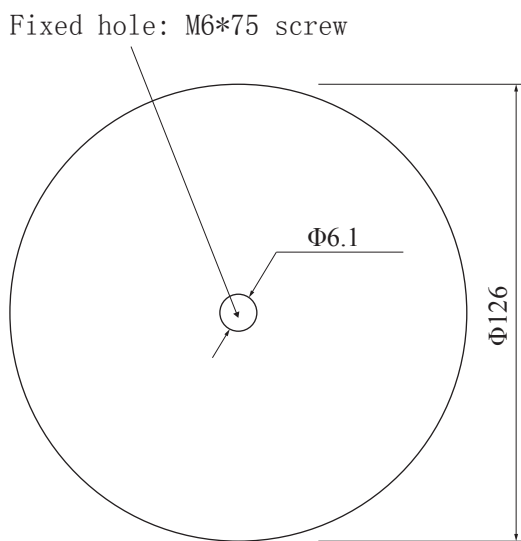

Front View

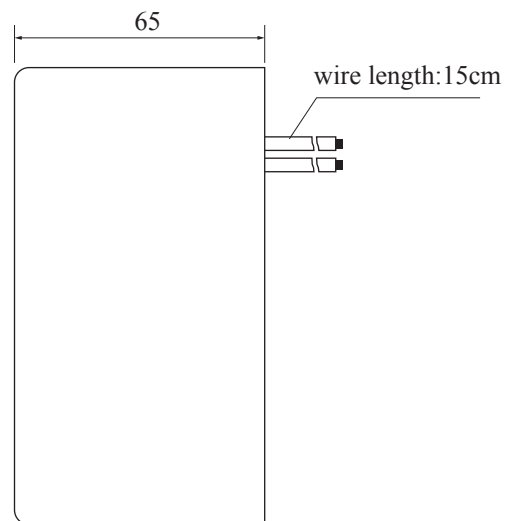

Side View