

LTC series toroidal transformer



Model:LTC80

Characteristics:

Vacuum epoxy encapsulated, small dimension,light weight, high efficiency,low noise,wide application,lead type output.
 Primary working voltage:110×2/115×2(Can be customized according to customer's requirements)



Technical index:


Installation method:Sub-plate mount
 Flame resistance:UL94-V0
 Insulation class:B grade
 Work temperature:-30°C~+40°C
 Frequency range:50Hz~60Hz
 Dielectric strength:P/S: 4.5KV AC

Secondary voltage	Secondary no load voltage	Secondary full load current
9V×2	10.8V×2	4.44A×2
12V×2	13.8V×2	3.33A×2
15V×2	17.3V×2	2.67A×2
18V×2	20.7V×2	2.22A×2
22V×2	25.4V×2	1.82A×2


Electrical data:

Primary working voltage	110×2/115×2	V
Output power	80	VA
No-load loss	8.91	W
Weight		g


Connection diagram:

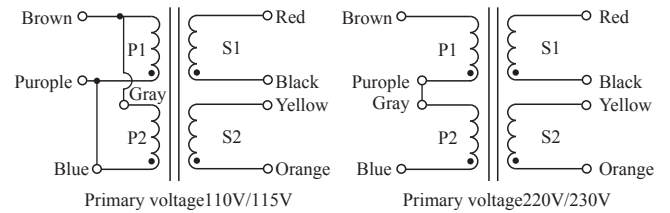

Dimension(mm):

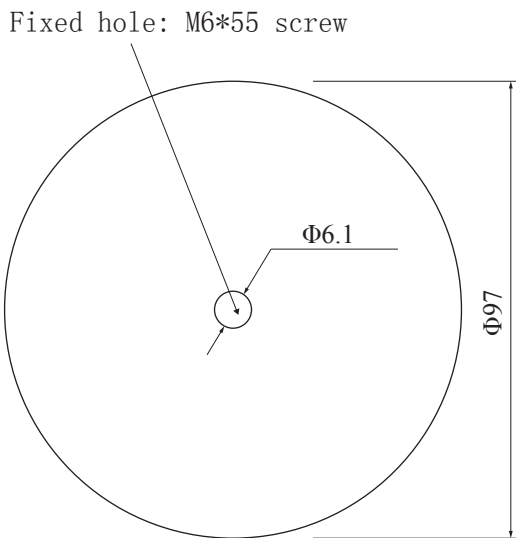

Front View

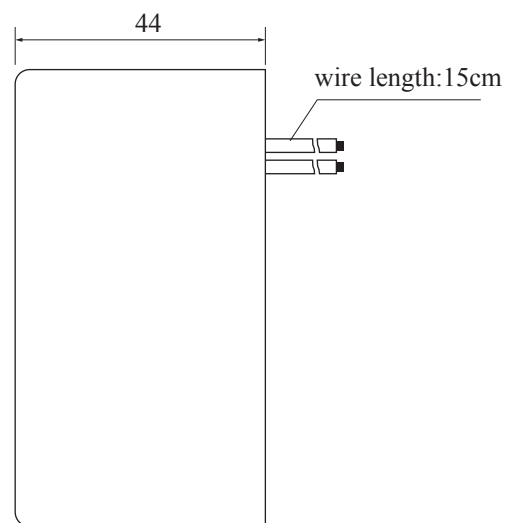

Side View