

# Waterproof transformer



## Model:OE4825

Waterproof transformer, Reasonable design, Stable safety,  
Built-in recoverable thermal fuse ( optional).

### Technical Index:

Sub-plate mount, Leading wire input / output

Flame resistance : UL94-V0

Insulation class : B

Operation temperature:  $-25^{\circ}\text{C} \sim +40^{\circ}\text{C}$

Waterproof class: IP67

Work frequency: 50Hz~60Hz

Dielectric strength: 3.75KV 50Hz 1min





### Technical Parameters table:

Primary voltage	110/220/230	V
Primary voltage range	$\pm 10$	%
Voltage regulation	$\leq 17$	%
Power	15	VA
Temperature rising	$\leq 25$	$^{\circ}\text{C}$
No load loss	$\leq 0.9$	W
weight		g


Secondary voltage	Secondary no load voltage	Secondary full load current
6V	6.7V	2500mA
7.5V	8.4V	2000mA
9V	10.1V	1666mA
12V	13.4V	1250mA
15V	16.8V	1000mA
18V	20.1V	833mA
24V	26.9V	625mA

### Dimension ( in mm ) :

### Schematic Diagram:

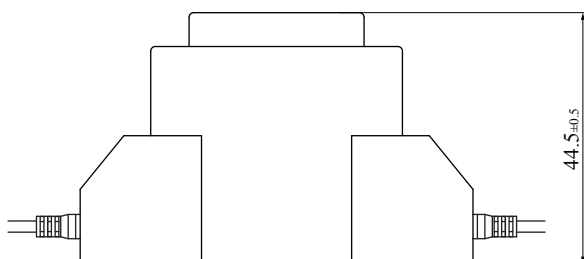

Front View

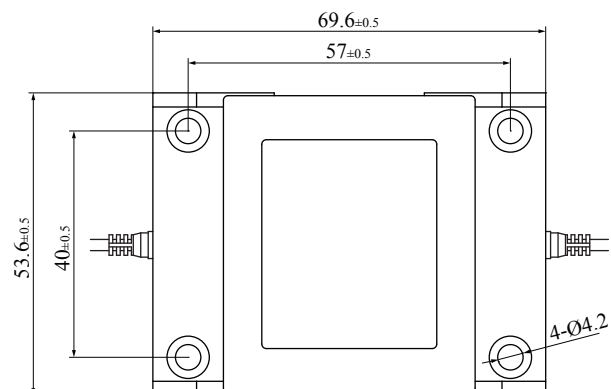

Top View