

Waterproof transformer



Model:OE8642

Waterproof transformer,Reasonable design,Stable safety,
Built-in recoverable thermal fuse (optional).

Technical Index:

Sub-plate mount,Leading wire input / output

Flame resistance : UL94-V0

Insulation class : B

Operation temperature: -25°C~+40°C

Waterproof class: IP67

Work frequency: 50Hz~60Hz

Dielectric strength: 3.75KV 50Hz 1min




Technical Parameters table:


Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤8	%
Power	120	VA
Temperature rising	≤40	°C
No load loss	≤3	W
weight	2.2	kg

Secondary voltage	Secondary no load voltage	Secondary full load current
6V	6.5V	20A
7.5V	8.1V	16A
9V	9.72V	13.33A
12V	12.9V	10A
15V	16.2V	8A
18V	19.4V	6.66A
24V	25.9V	5A


Schematic Diagram:




Dimension (in mm) :



Front View

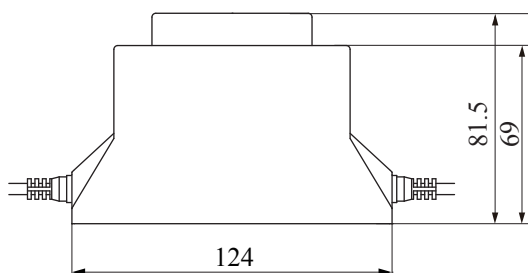

Side View

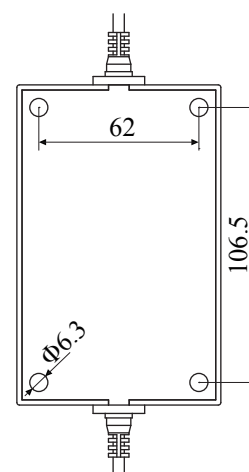

Top View