


Model:PE3018-M

Characteristics:

1. Vacuum epoxy sealing, 100 °C/6 hours high temperature aging, life span of 20 years, high electrical strength
2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof



Technical Index:

Technical Index: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C ~ +70°C

Work frequency: 50Hz~60Hz


Dielectric strength: Pri./Sec. 3.75KV 50Hz 1min 5mA, Sec/Sec 500V 50Hz 1min 5mA

Technical Parameters table:

Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤25	%
Power	2	VA
Temperature rising	≤16	°C
No load loss	≤0.5	W
weight	115	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	8V	8V×2	333mA	166mA×2
7.5V	7.5V×2	10V	10V×2	266mA	133mA×2
9V	9V×2	12V	12V×2	222mA	111mA×2
12V	12V×2	16V	16V×2	166mA	83mA×2
15V	15V×2	20V	20V×2	133mA	66.5mA×2
18V	18V×2	24V	24V×2	111mA	55.5mA×2
24V	24V×2	32V	32V×2	83mA	41.5mA×2

Schematic Diagram:

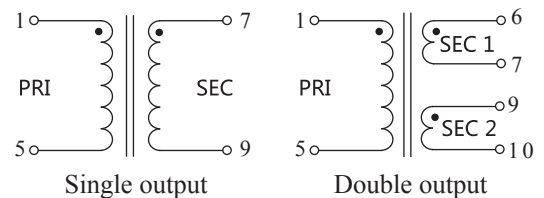

Dimension (in mm) :

