

K series isolation transformer



Model: **PE3817-M**

Characteristics:

Vacuum Epoxy Encapsulated, PCB mounting,
 Primary voltage: 110V/220V/230V/380.

Technical Index:

Technical Index: PCB
 Flame resistance: UL94-Vo
 Insulation class: B
 Operation temperature: -30°C ~ +40°C
 Work frequency: 50Hz ~ 60Hz
 Dielectric strength: 3.5KV 50Hz 1min




Secondary output voltage		Secondary No-load Voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.3V	8.7V×2	1000mA	500mA×2
7.5V	7.5V×2	10.6V	10.9V×2	800mA	400mA×2
9V	9V×2	13V	13V×2	667mA	334mA×2
12V	12V×2	17V	17.4V×2	500mA	250mA×2
15V	15V×2	20.8V	21.2V×2	400mA	200mA×2
18V	18V×2	24.4V	24.6V×2	334mA	167mA×2
24V	24V×2	32.3V	32.3V×2	250mA	125mA×2

Technical Parameters table:

Primary voltage	110/220/230/380	V
Primary voltage range	10	%
Voltage regulation	≤21	%
Power	6	VA
Temperature rising	≤24	°C
No load loss	≤0.5	W
weight	190	g

Schematic Diagram:

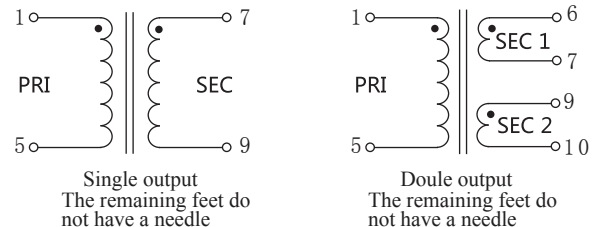

※Non-standard products: Can be made according to user requirements

Dimension (in mm) :

