

Model:PE4121G-I

Characteristics:

1. Vacuum epoxy sealing, 100 °C/6 hours high temperature aging, life span of 20 years, high electrical strength
2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof



Technical Index:

Technical Index: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C ~ +40°C

Work frequency: 50Hz ~ 60Hz

Dielectric strength: Pri./Sec. 10KV 50Hz 1min 5mA, Sec/Sec 500V 50Hz 1min 5mA

Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product


Standard output parameters Table:

(Delivery is subject to full load voltage)


Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V × 2	7.2V	7.2V × 2	1000mA	500mA × 2
7.5V	7.5V × 2	9V	9V × 2	800mA	400mA × 2
9V	9V × 2	10.8V	10.8V × 2	667mA	334mA × 2
12V	12V × 2	14.5V	14.5V × 2	500mA	250mA × 2
15V	15V × 2	18.2V	18.2V × 2	400mA	200mA × 2
18V	18V × 2	21.6V	21.6V × 2	334mA	167mA × 2
24V	24V × 2	28.5V	28.5V × 2	250mA	125mA × 2

Primary voltage	660/690/1140/1200	V
Primary voltage range	±10	%
Voltage regulation	≤18	%
Power	6	VA
Temperature rising	≤20	°C
No load loss	≤0.8	W
weight	245	g


Schematic Diagram:

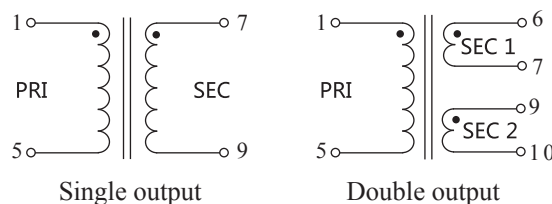

Dimension (in mm) :

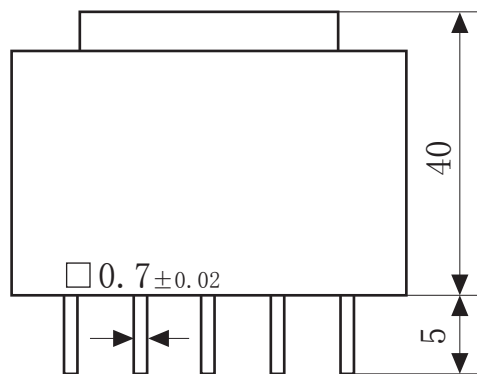

Front View

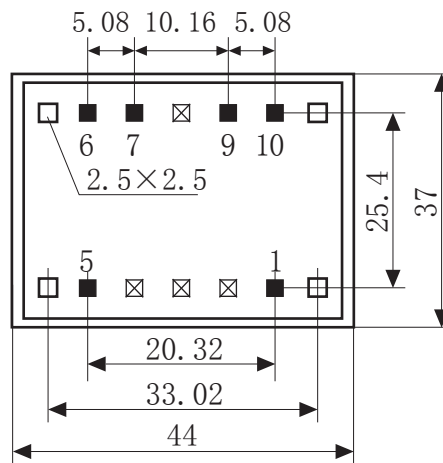

Bottom View