

Model:PE4215-M

Characteristics:

1. Vacuum epoxy sealing, 100 °C /6 hours high temperature aging, life span of 20 years, high electrical strength
2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof



Technical Index:

Technical Index: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C ~ +40°C

Work frequency: 50Hz ~ 60Hz


Dielectric strength: 3.75KV 50Hz 1min

Technical Parameters table:


Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤20	%
Power	6	VA
Temperature rising	≤22	°C
No load loss	≤0.8	W
weight	200	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	8.7V	8.7V×2	1000mA	500mA×2
7.5V	7.5V×2	10.9V	10.9V×2	800mA	400mA×2
9V	9V×2	13V	13V×2	667mA	334mA×2
12V	12V×2	16.7V	16.7V×2	500mA	250mA×2
15V	15V×2	20.2V	20.2V×2	400mA	200mA×2
18V	18V×2	24.6V	24.6V×2	334mA	167mA×2
24V	24V×2	30.8V	30.8V×2	250mA	125mA×2


Schematic Diagram:

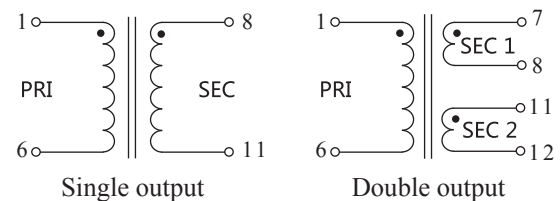

Dimension (in mm±0.5) :

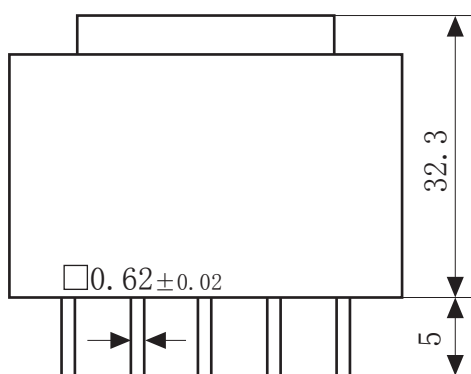

Front View

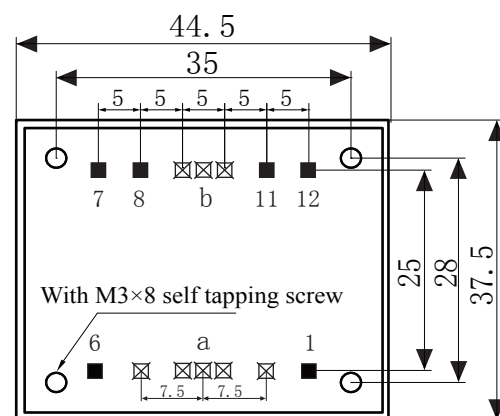

Bottom View