

Model:PE6627K-M

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,K type mounting,
a fixed hole on each side,Pirmary voltage: 110V/220V/230V,
or producing as customerized.

Technical Index:

Technical Index: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30℃~+40℃

Work frequency: 50Hz~60Hz

Dielectric strength: 4KV 50Hz 1min




Technical Parameters table:


Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤12	%
Power	40	VA
Temperature rising	≤30	℃
No load loss	≤1	W
weight	600	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	6.8V	6.8V×2	6.6A	3.3A×2
7.5V	7.5V×2	8.5V	8.5V×2	5.3A	2.67A×2
9V	9V×2	10.2V	10.2V×2	4.44A	2.22A×2
12V	12V×2	13.6V	13.6V×2	3.3A	1.67A×2
15V	15V×2	17V	17V×2	2.6A	1.3A×2
18V	18V×2	20V	20V×2	2.2A	1.1A×2
24V	24V×2	27V	27V×2	1.6A	0.8A×2


Schematic Diagram:

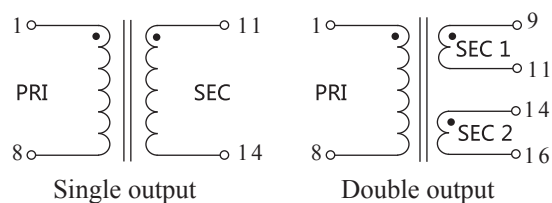

Dimension (in mm) :

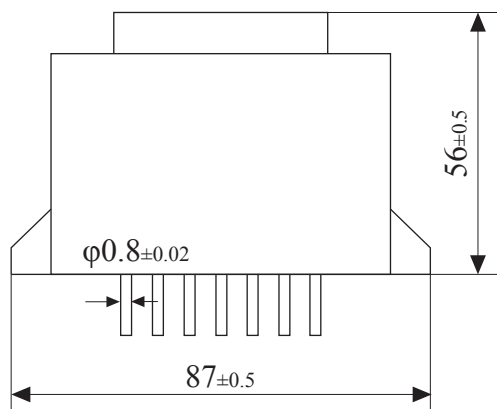

Front View

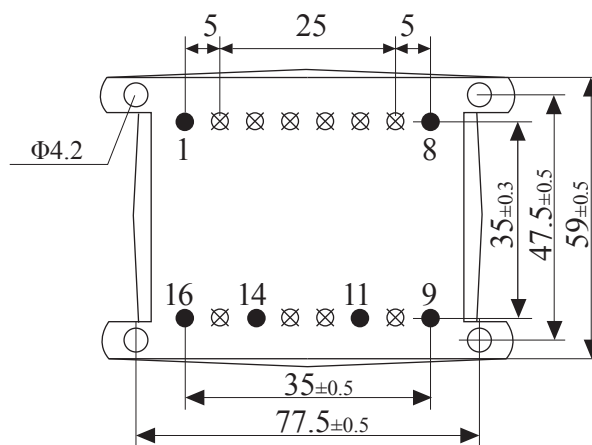

Bottom View