

Model:PT4808T

Characteristics:

PCB mounting,low mounting height,Input:double
110V/double 115V(or producing as customerized).


Technical Index:

Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: -30℃~+70℃
Work frequency: 50Hz~60Hz
Dielectric strength: 3.75KV 50Hz 1min


Technical Parameters table:

Primary voltage	110×2/115×2	V
Pirmary voltage range	±10	%
Voltage regulation	≤28	%
Power	5	VA
Temperature rising	≤27	℃
No load loss	≤0.5	W
weight	160	g


Dimension（in mm）：

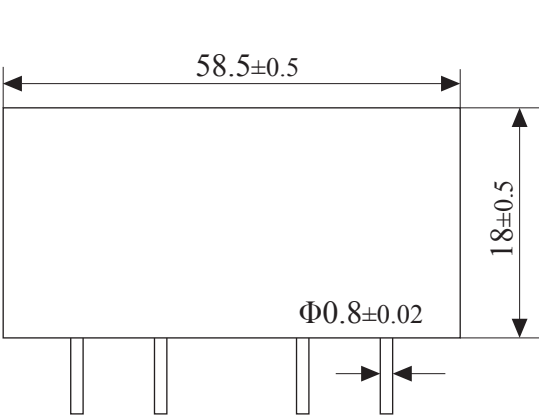

Front View

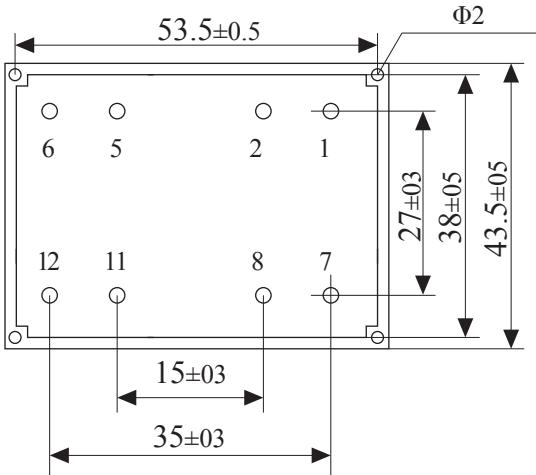

Bottom View

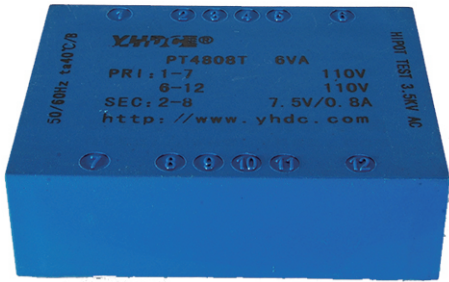

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	8.3V	8.3V×2	833mA	416.5mA×2
7.5V	7.5V×2	10.4V	10.4V×2	666mA	333mA×2
9V	9V×2	12.5V	12.5V×2	555mA	277.5mA×2
12V	12V×2	16.7V	16.7V×2	416mA	208mA×2
15V	15V×2	20.8V	20.8V×2	333mA	166.5mA×2
18V	18V×2	25V	25V×2	277mA	138.5mA×2
24V	24V×2	33.3V	33.3V×2	208mA	104mA×2

Schematic Diagram:

