

# PTC5 welded toroidal transformers



## Characteristics:

Small leakage, Low noise, High efficiency, Low no load current, PCB mounting, Used for supper acoustics, Medical equipment, Military engineering, Precision instrument, using the imported high quality toroidal core Primary working

## Technical index:

Mounting type: PCB


Flame resistance: UL94-V0

Insulation class: B grade

Work temperature: -30°C ~ +60°C

Frequency range: 50Hz ~ 60Hz

Dielectric strength: PRI/SEC: 4KV 50Hz 1min 5mA  
SEC/SEC 500V 50Hz 1min 5mA

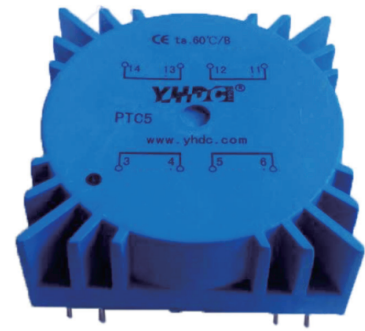


Standard output parameter table :  
(factory full load voltage shall prevail)

Secondary voltage	Secondary no load voltage	Secondary full load current
7V × 2	8.2V × 2	357mA × 2
9V × 2	12V × 2	278mA × 2
12V × 2	15.5V × 2	208mA × 2
15V × 2	19V × 2	167mA × 2
18V × 2	24V × 2	139mA × 2
22V × 2	27.4V × 2	113mA × 2

**Electrical parameters:** ( The following parameters are typical values and actual values will be subject to product testing )


Primary voltage	Double110	Double115	Unit
Primary voltage range	± 10		%
Power	5		VA
Voltage regulation	≤ 25		%
Temperature rising	≤ 20		°C
No load loss	< 0.1		W
weight	154		g

## Dimension(mm±0.5):

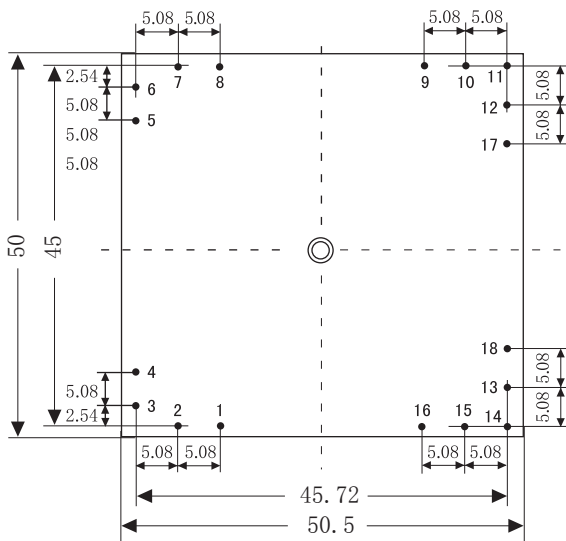

Bottom view

## Schematic diagram:

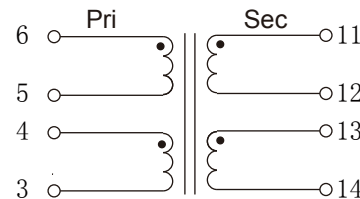


## Input/output shorting method

### Series connection:

4-5 short circuit/3-6input  
12-13 short circuit/11-14 output

### Parallel connection:

3-5 short circuit. 4-6 short circuit  
3-4 input or 5-6 input  
11-13 short circuit. 12-14 short circuit  
11-12 output or 13-14 output

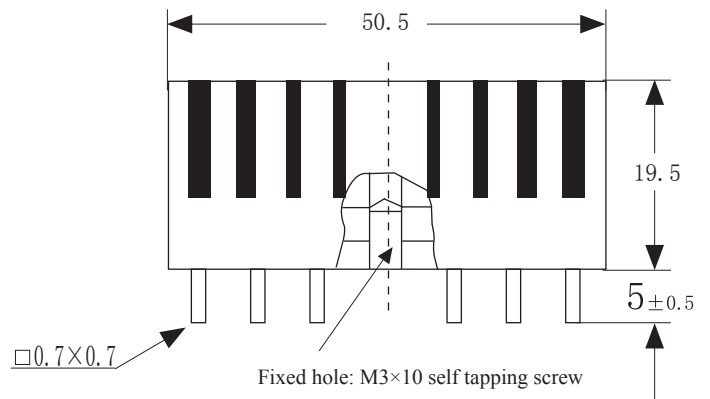

Front view