


PU series flat type isolation transformer



Model:PU3006B

Characteristics:

PCB mounting, low mounting height, Input: double
110V/double 115V(or producing as customerized).

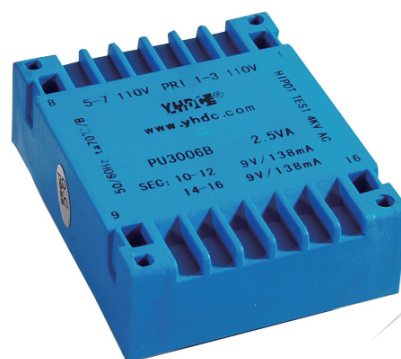

Technical Index:


Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: $-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$
Work frequency: 50Hz~60Hz
Dielectric strength: 4KV 50Hz 1min

Technical Parameters table:

Primary voltage	110×2/115×2	V
Pirmary voltage range	±10	%
Voltage regulation	≤45	%
Power	2.5	VA
Temperature rising	≤20	°C
No load loss	≤0.4	W
weight	120	g

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	8.04V×2	208mA×2
7.5V×2	10V×2	167mA×2
9V×2	12V×2	139mA×2
12V×2	16V×2	104mA×2
15V×2	20.1V×2	83mA×2
18V×2	24.1V×2	69mA×2
24V×2	32.1V×2	52mA×2

Dimension (in mm) :

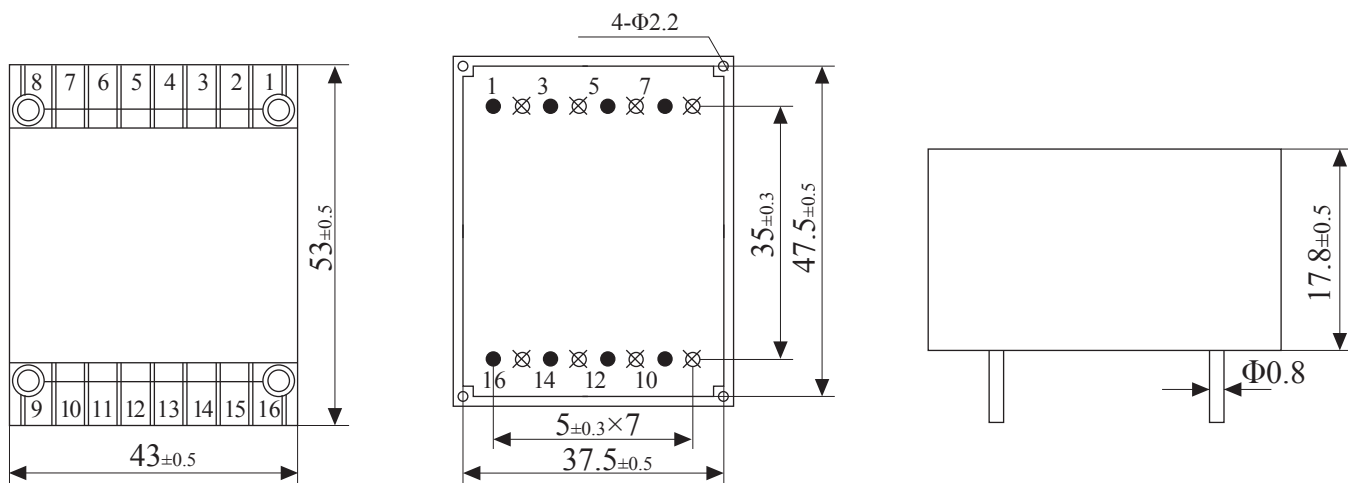

Schematic Diagram:

