


PU series flat type isolation transformer



Model:PU3009B

Characteristics:

PCB mounting, low mounting height, Input: double
110V/double 115V(or producing as customerized).

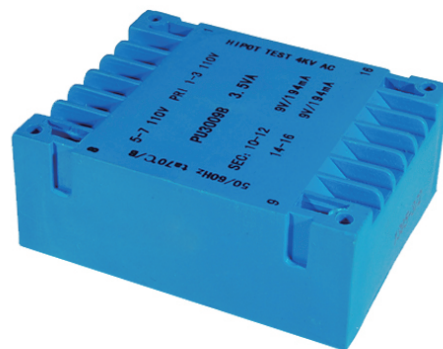

Technical Index:


Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: -30°C ~ +70°C
Work frequency: 50Hz ~ 60Hz
Dielectric strength: 4KV 50Hz 1min

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	8.04V×2	333mA×2
7.5V×2	10V×2	267mA×2
9V×2	12V×2	222mA×2
12V×2	16V×2	167mA×2
15V×2	20.1V×2	133mA×2
18V×2	24.1V×2	111mA×2
24V×2	32.1V×2	83mA×2


Technical Parameters table:

Primary voltage	110×2/115×2	V
Primary voltage range	±10	%
Voltage regulation	≤40	%
Power	4	VA
Temperature rising	≤20	°C
No load loss	≤0.5	W
weight	140	g

Schematic Diagram:

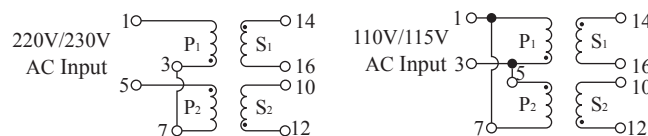

Dimension (in mm) :

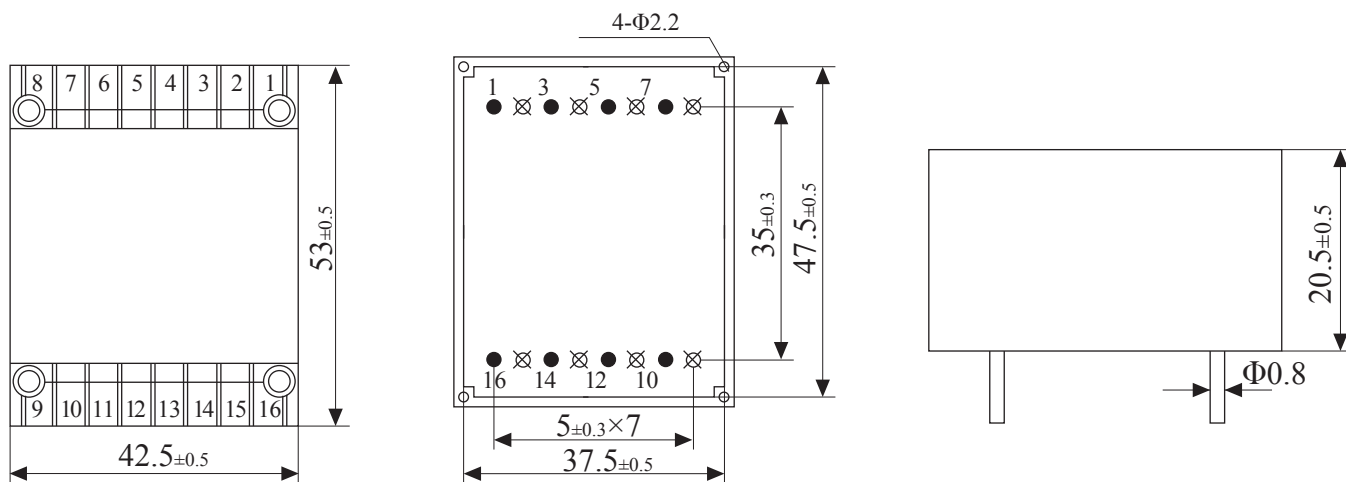

Top View

Bottom View

Side View