

PU series flat type isolation transformer



Model:PU3910B

Characteristics:

PCB mounting, low mounting height, Input: double
110V/double 115V(or producing as customerized).

Technical Index:

Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: -30°C ~ +40°C
Work frequency: 50Hz~60Hz
Dielectric strength: 4KV 50Hz 1min




Technical Parameters table:

Primary voltage	110×2/115×2	V
Primary voltage range	±10	%
Voltage regulation	≤22.5	%
Power	10	VA
Temperature rising	≤22	°C
No load loss	≤1.1	W
weight	280	g

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	7.6V×2	833mA×2
7.5V×2	9.5V×2	667mA×2
9V×2	11.4V×2	556mA×2
12V×2	15.2V×2	417mA×2
15V×2	19V×2	333mA×2
18V×2	22.8V×2	278mA×2
24V×2	30.4V×2	208mA×2

Dimension (in mm) :

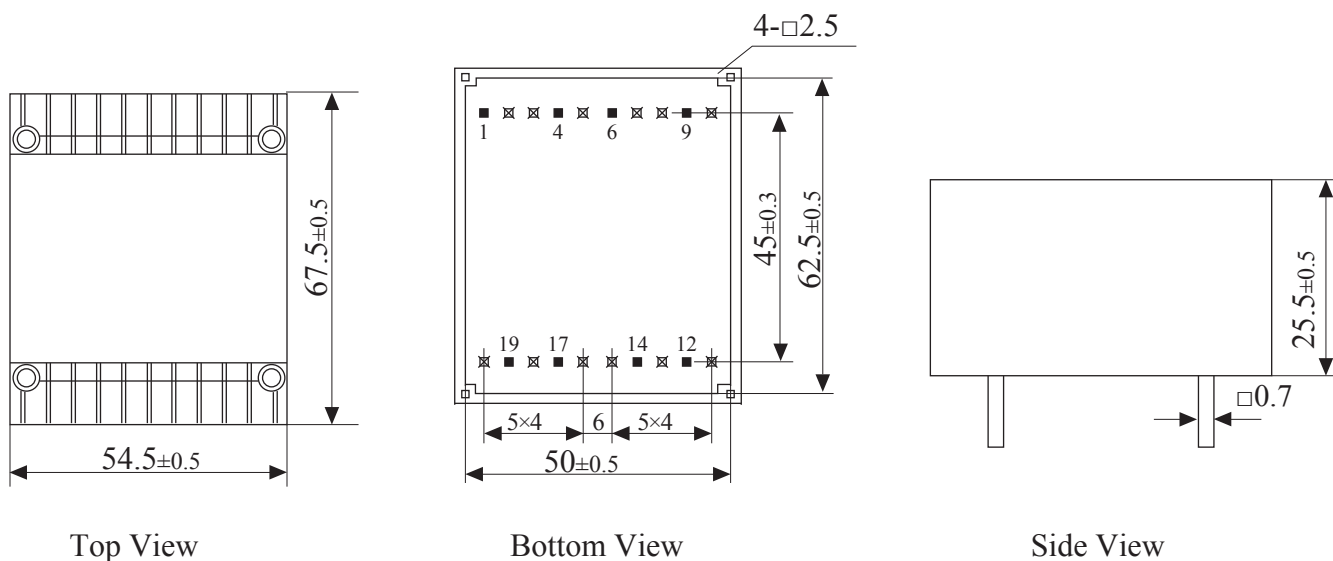

Schematic Diagram:

