

PU series flat type isolation transformer




Model:PU3914B

Characteristics:

- PCB mounting,low mounting height,Input:double
- 110V/double 115V(or producing as customerized).

Technical Index:

- Mounting type: PCB
- Flame resistance : UL94-V0
- Isulation class: B
- Operation temperature: -30℃~+40℃
- Work frequency: 50Hz~60Hz
- Dielectric strength: 4KV 50Hz 1min

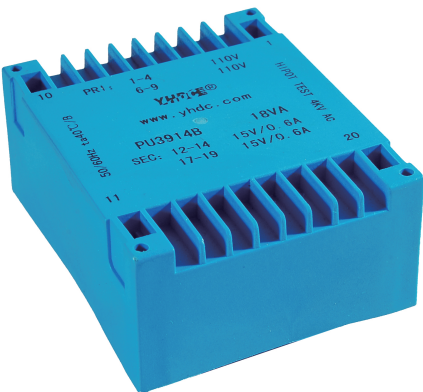


Technical Parameters table:


Primary voltage	110×2/115×2	V
Pirmary voltage range	±10	%
Voltage regulation	≤19	%
Power	18	VA
Temperature rising	≤25	℃
No load loss	≤1.1	W
weight	390	g

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	7.35V×2	1.5A×2
7.5V×2	9.19V×2	1.2A×2
9V×2	11V×2	1A×2
12V×2	14.7V×2	0.75A×2
15V×2	18.3V×2	0.6A×2
18V×2	22V×2	0.5A×2
24V×2	29.4V×2	0.375A×2

Schematic Diagram:

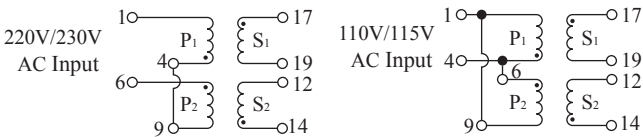

Dimension (in mm) :

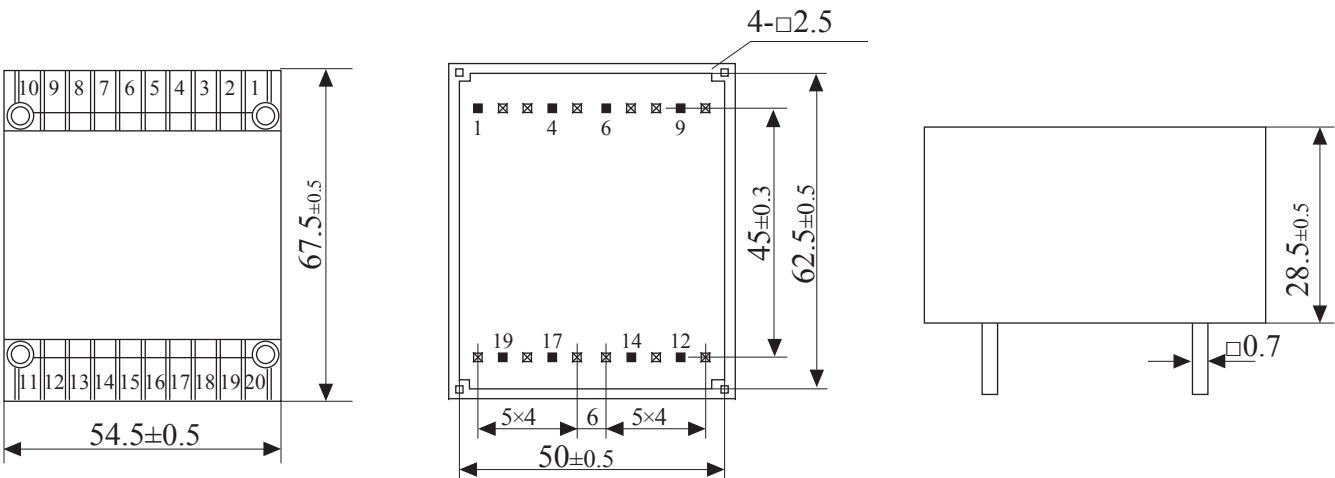

Top View

Bottom View

Side View