

Characteristic:

Safety lock clip, easy installation, lead output.


Product picture : (the printed words are for reference only, subject to the actual product)

Technical index:


- Mounting type: Suspended type
- Material of core——Ferrite
- Execution standard: GB20840-2014
- Operating temperature: -25℃ ~+70℃
- Storage temperature: -30℃ ~+90℃
- Frequency range: 50Hz-1KHz
- Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
- Output/Housing AC 3.5KV/1min 50Hz





Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	20		50			60	80			A	Specifications of lead wire: 2×0.2mm shielding wire The length of lead wire: 100cm-105cm  TVS: Transient Voltage Suppressor (7.5V) Current output type The secondary is not allowed to open circuits
Rated output	20	10	50	25	16.6	20	80	40	26.6	mA	
Turns ratio	1:1000	1:2000	1:1000	1:2000	1:3000	1:3000	1:1000	1:2000	1:3000	—	
Sampling resistance	10									Ω	
Accuracy	1									%	
Angular difference	≤184′									points	
Weight	45									g	

Dimensions (in mm±0.5) :

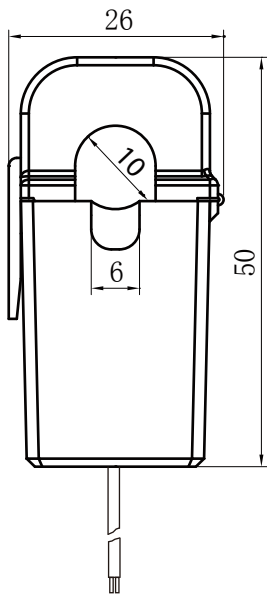

Front view

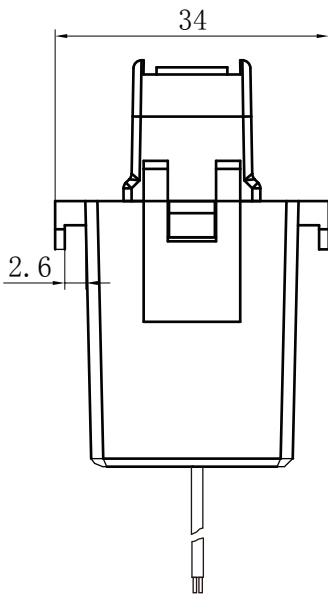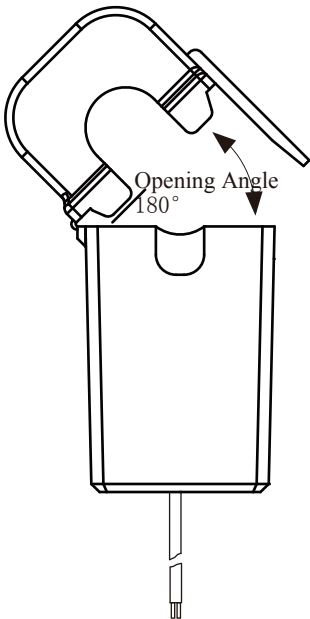

Side view