

Φ 13mm Aperture Split core current transformer

Front view



Opening view



Bottom view



If you need network cable, please put forward separately when ordering

Product features

- Safety lock buckle, simple installation
- RJ45 interface output
- Suspended type

Product application


- Portable instrument
- Household metering
- Monitoring the load of machine

Product advantage


- Small volume, Light weight
- Low cost
- High turns, High precision

Installation diagram


Primary threading method:




1. Open the buckle



2. Open upward



3. Put in lead wire



4. Fasten the buckle

Typical technical index:

- Material of core——Ferrite
- Working voltage——Phase voltage \leqslant 720V
- Working temperature—— $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Storage temperature—— $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$
- Frequency range——50Hz \sim 1KHz
- Dielectric strength——Input (bare conductor) /output AC 800V/1min 5mA 50Hz
Output/Outer shell AC 3.5KV/1min 5mA 50Hz


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Model	Input current	Output	Turns ratio	Load resistance	Accuracy	Linearity	Weight
SCT013-RJ45	100A	50mA	1: 2000	10 Ω	0.5%/1%	1%	47g
SCT013-RJ45	5A	1V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	10A	1V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	15A	1V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	20A	1V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	25A	1V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	30A	1V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	50A	1V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	60A	1V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	100A	1V	-	built-in	0.5%/1%	1%	47g


Model	Input current	Output	Turns ratio	Load resistance	Accuracy	Linearity	Weight
SCT013-RJ45	5A	0.333V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	10A	0.333V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	15A	0.333V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	20A	0.333V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	25A	0.333V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	30A	0.333V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	50A	0.333V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	60A	0.333V	-	built-in	0.5%/1%	1%	47g
SCT013-RJ45	100A	0.333V	-	built-in	0.5%/1%	1%	47g

***Can be customized parameters**

Wiring schematic diagram:

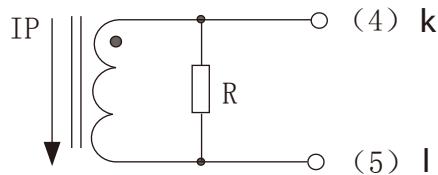


Built-in sampling resistance
Voltage output type
Secondary doesn't allow short circuit

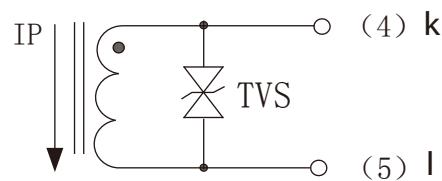


TVS: Transient voltage suppressor
Current output type
Secondary doesn't allow open circuit


Outline size (in mm ± 0.5) :

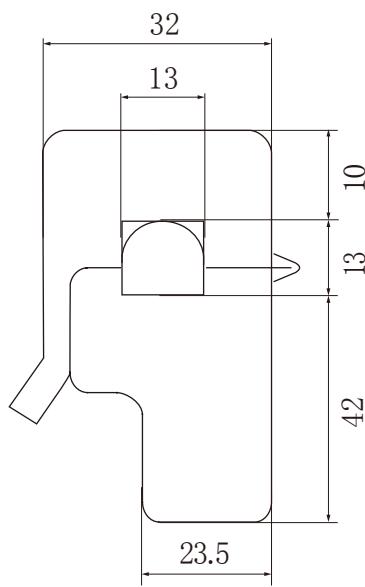

Front view

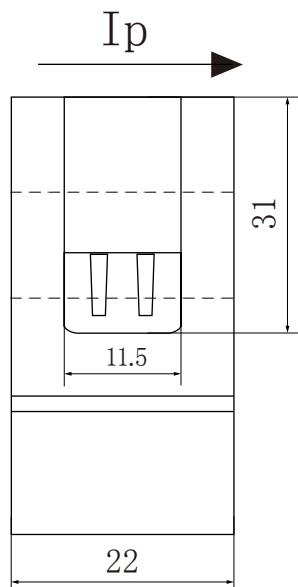

Side view

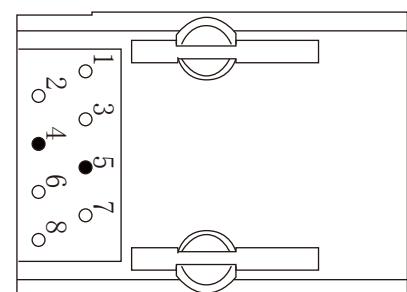

Interface terminal diagram

