

Patent number: ZL 2019 2 0555263.7

Characteristics:

Split core structure, easy to installation, lead wire output.
Outdoor use, good waterproof performance (IP67).

Technical index:

- Mounting type: Suspended
- Material of core: silicon steel sheet
- Flame resistance: UL94-VO
- Meet the standard: GB20840-2014
- Operating temperature: -20°C ~ +60°C
- Storage temperature: -30 ° C to +90 ° C
- Frequency range: 50HZ-60Hz
- Electrical resistance: 3.5kV 50Hz 1min
- Weight: 1.2 Kg


Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Input current A	Output current A	Rated output power VA			Turns of through hole
		0.5S Grade	0.5 Grade	1 Grade	
200A	5A	-	-	2.5	1
300A	5A	-	2.5	6.25	1
400A	5A	3.75	7.5	12.5	1
500A	5A	7.5	10	15	1
600A	5A	7.5	20	25	1

Product picture print for reference only, subject to the actual product




Schematic diagram:

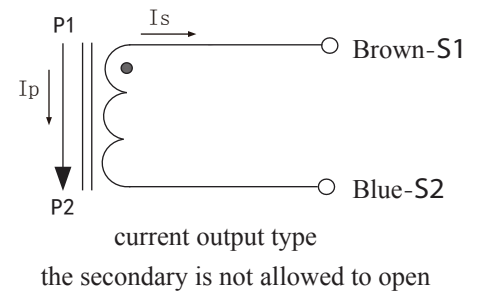


Specifications of lead wire: H07RN-F 2*2.5mm² Sheath line
Length: 100cm~105cm
Color: blue, brown


Dimensions (in mm±0.5)

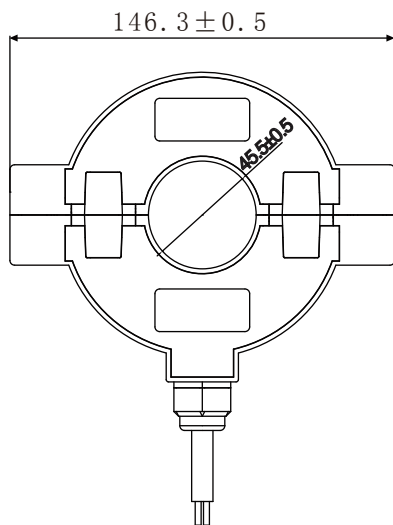

Front view

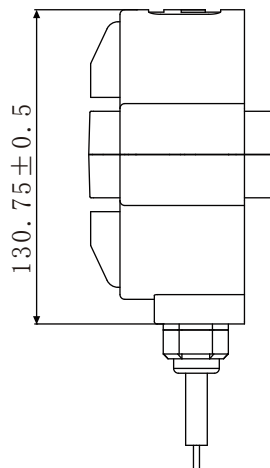

Side view

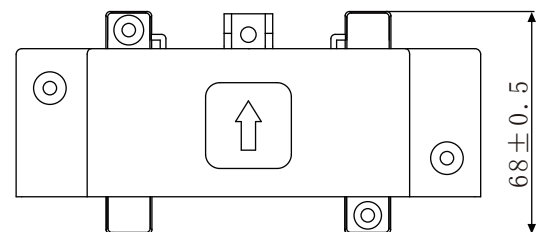

Bottom view