

IGBT, MOSFET drive and signal isolation transmission transformer

Product application

- Medical equipment
- Aerospace equipment
- Power generation control equipment
- Electric heating equipment
- Disaster prevention security equipment
- Safety devices




Typical technical index:

- Fair resistance: with UL94-V0
- Insulation grade: B grade (130°C)
- Operating temperature: -25°C ~ +70°C
- Storage temperature: -40°C ~ +85°C
- Frequency range: 30KHz ~ 200KHz
- Dielectric strength: Pri./Sec. 3KV 50Hz AC/1min 5mA
Sec. 500V AC/1min 50Hz 5mA

Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Model	SMD5032	SMD5032	SMD5032	SMD5032	SMD5032	SMD5032	Unit
Project Data	-101	-201	-301	-111	-211	-311	
Vout microsecond integral	60	60	60	60	60	60	μvs
Input pulse amplitude	6	12	18	6	12	18	V
Output pulse amplitude	≥5	≥5	≥5	≥5 *2	≥5 *2	≥5 *2	V
Trigger current Max	100	100	100	100	100	100	mA
Turns ratio	1:1	2:1	3:1	1:1:1	2:1:1	3:1:1	
Load resistance	100	100	100	100	100	100	Ω
Duty ratio D=1:2	1:2	1:2	1:2	1:2	1:2	1:2	
Pulse width	10	5	4	10	5	4	μs
primary loop maximum working voltage	380	380	380	380	380	380	V
Weight	3.5	3.5	3.5	3.5	3.5	3.5	g

Dimensions (in mm±0.5) :

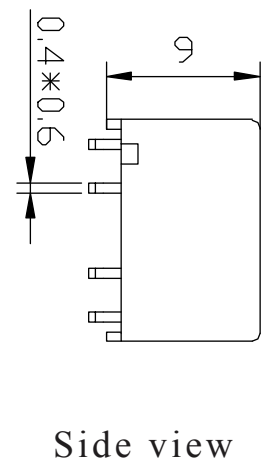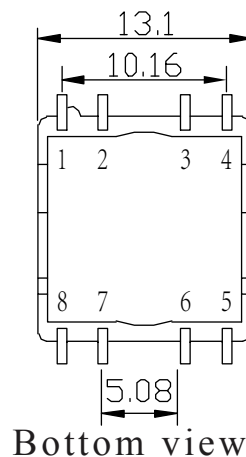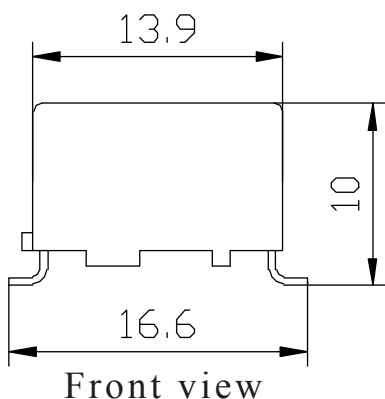

Product application

- Aerospace equipment
- Medical equipment
- Power generation control equipment
- Vehicle control equipment
- Electric heating equipment
- Disaster prevention security equipment
- Safety devices
- Other special equipment




Precautions for welding (reflow welding)

Welding temperature: ≤250°C


Welding time: ≤7 minutes

Patent no. : ZL 2020 2 0228075.6

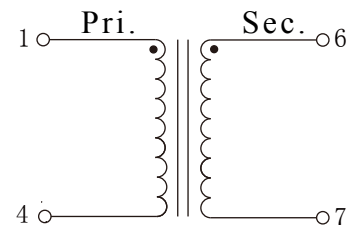

Single output



2、3、5、8 No needle

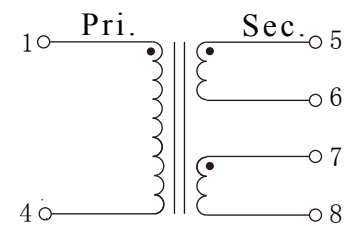

Dual output

2、3 No needle

packaging

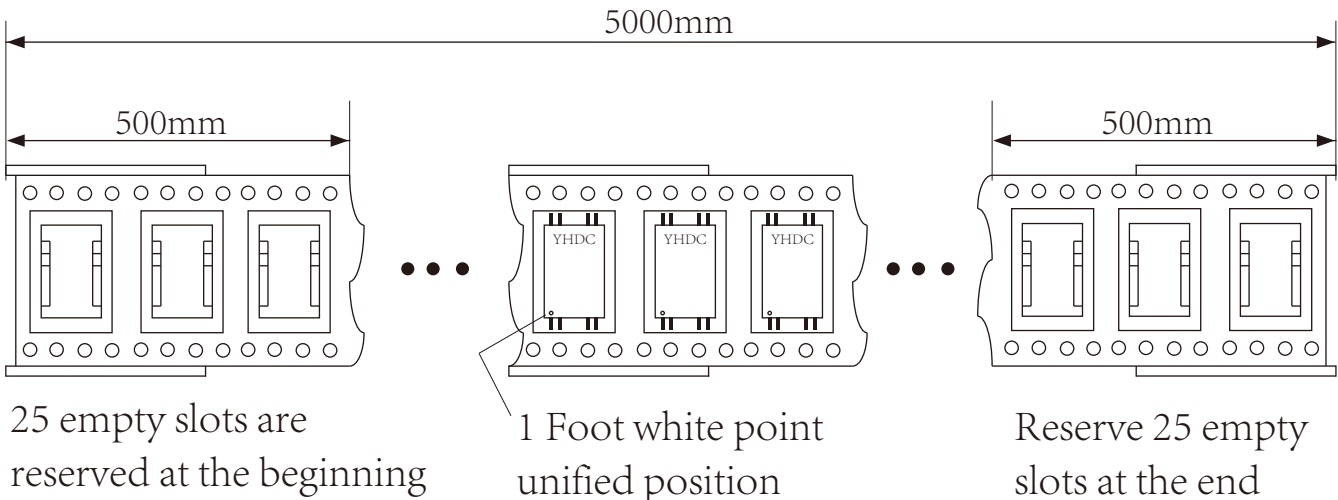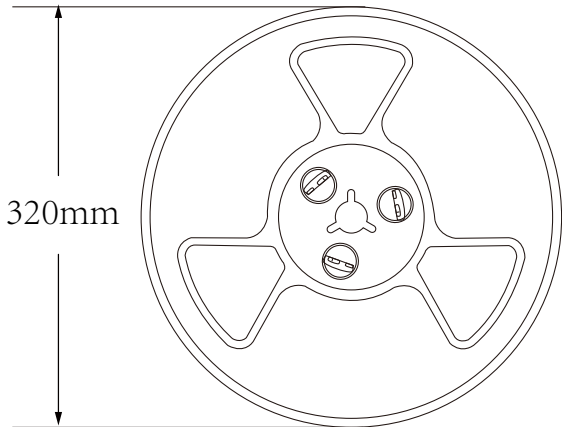

packing	1 pc	about3.2g	1pc
	1 salver	about750g	200pcs
	1 carton	about4Kg	1000pcs