

# TA8348D-200



Characteristic: Epoxy encapsulated、 Exterior size small, Totally enclosed dc component.

Technical index:

Mounting type: PCB

Core material: Composite magnetic

Fair resistance: with UL94-V0

Operating temperature:  $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$

Storage temperature:  $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Frequency Range: 20Hz-1KHz


Dielectric strength: 3.5KV 50Hz 1min



Electrical parameters:

|                          |         |          |
|--------------------------|---------|----------|
| Rated Input              | 50      | A        |
| Rated output             | 25      | mA       |
| Change ratio             | 1: 2000 |          |
| Linearity                | 1       | %        |
| Max. sampling resistance | 100     | $\Omega$ |
| weight                   | 14      | g        |

Schematic Diagram :

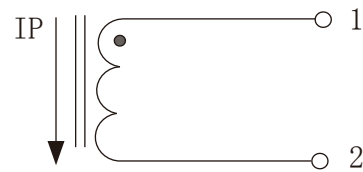


3, 4 is empty

Current output type

Secondary roads are not allowed

Dimensions(in mm):

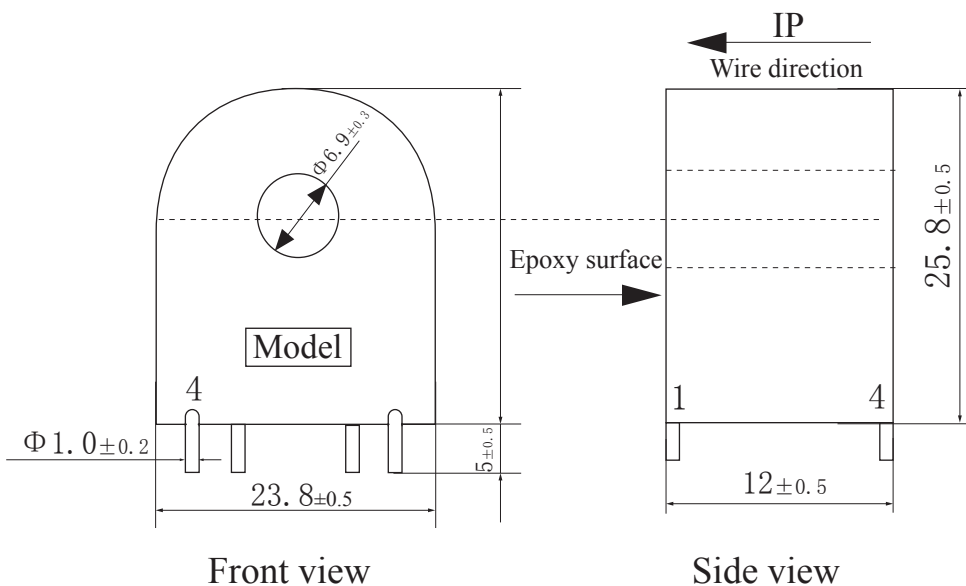

Pin location drawing:

