

# TA8350D-200



Characteristic: Epoxy encapsulated、 Exterior size small, Totally enclosed dc component.

Technical index:

Mounting type: PCB

Core material: Composite magnetic

Fair resistance: with UL94-V0

Operating temperature:  $-35^{\circ}\text{C} \sim 80^{\circ}\text{C}$

Storage temperature:  $-45^{\circ}\text{C} \sim +95^{\circ}\text{C}$

Frequency Range: 20Hz-1KHz


Dielectric strength: 3.5KV 50Hz 1min



Electrical parameters:

Rated Input	75	A
Rated output	37.5	mA
Change ratio	1: 2000	
Linearity	1	%
Max. sampling resistance	100	$\Omega$
weight	42	g

Schematic Diagram:

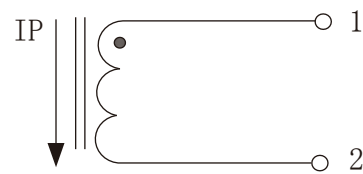


3, 4 is empty

Current output type

Secondary roads are not allowed

Dimensions(in mm):

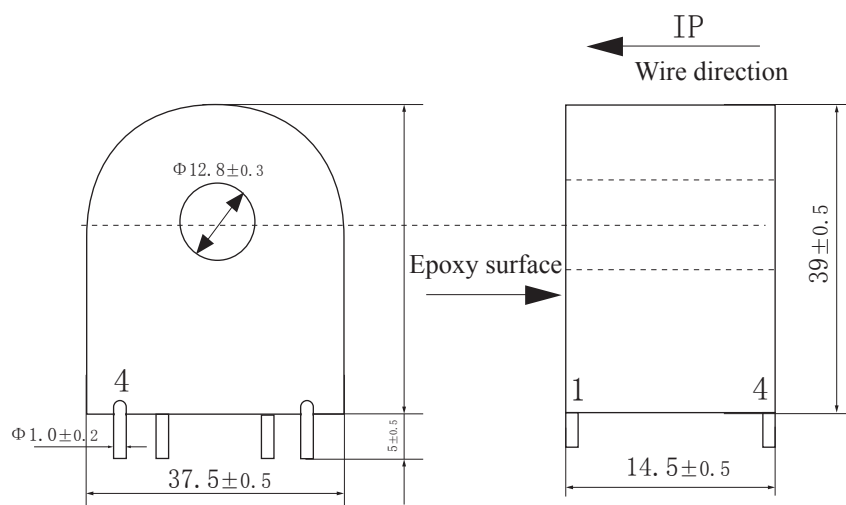

Front view

Side view

Pin location drawing:

