

# Mini current type voltage transformer

## Model: TV19G

**Characteristics:** TV19G is a current-type voltage transformer, which USES Perm alloy as the core. Different input voltages pass through current limiting resistance to make the primary side flow through different currents, and obtain the same current as the primary one.

### Technical index:

Mounting type: PCB mounting

Material of the core: permalloy

Flame resistance: UL94-V0

Complaint with: GB1208-2006

Operating temperature: -20℃ ~ +70℃


Storage temperature: -30℃ ~ +80℃

Frequency range: 20Hz-20KHz

Dielectric strength: 6KV 50Hz 1min



### Schematic diagram:

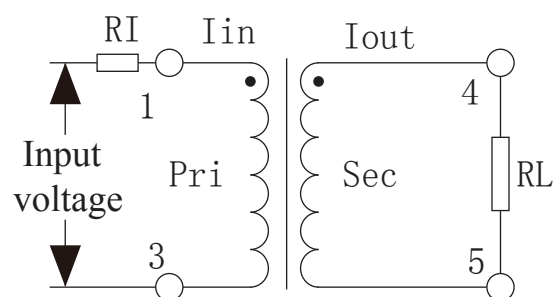


RI:Current limiting resistance

RL:Sampling resistance


### Electrical parameters:

Rated input	4	mA
Rated output	4	mA
Turns	2000: 2000	
Linearity	0.1	%
Max. measuring voltage	800	V
Phase error(Reference)	≤25'	
Sampling resistance max	400	Ω
Weight	17	g

### Dimensions (in mm) :

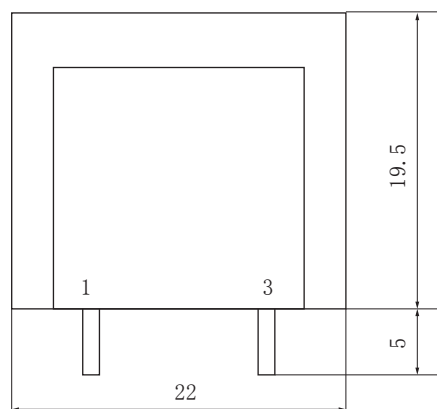

Front view

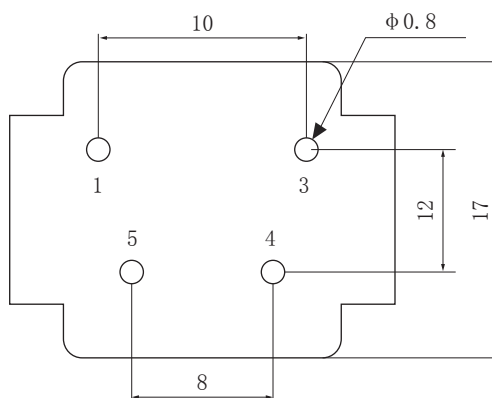

Bottom view