


Driver Installation on Mac

The driver requires OS X 10.9 or the version above.

Step 1 Double click the Mac driver. If you see a warning message, please open it and follow the two steps below. (Just continue if no warning message appears)

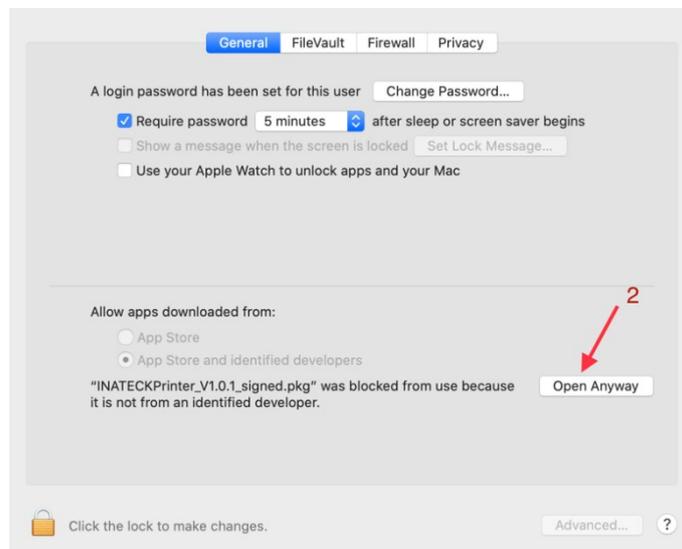

Double click "INATECKPrinter_v1.0.1_signed.pkg" to begin the driver installation

1、Open Installation Guide

2、Open and Install Driver




How to install INATECK
Printer driver.pdf




INATECKPrinter_v1.0.1_sign
ed.pkg

Step 2. Follow the installation steps until you see "The installation was successful".


1) Click "continue" button.

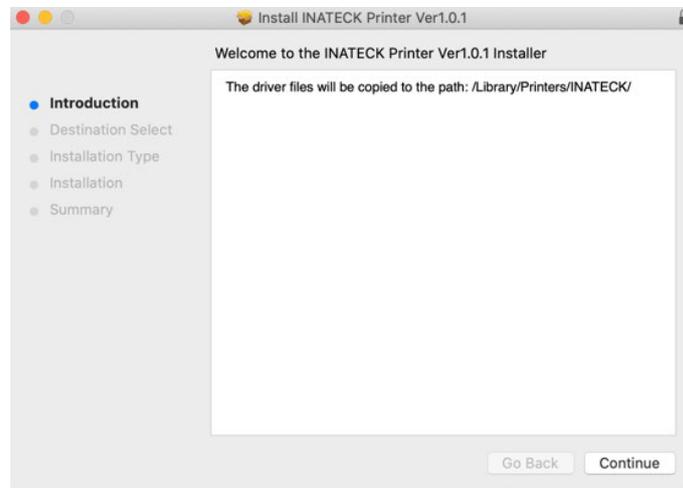


2) Click "Install"

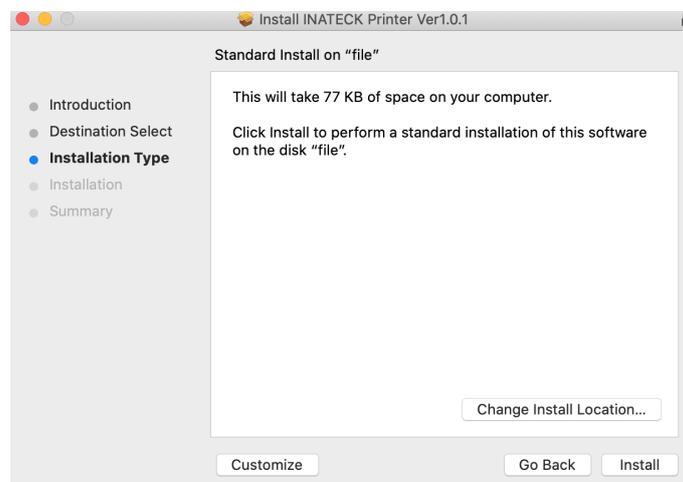

3) Use Touch ID or Enter your password.

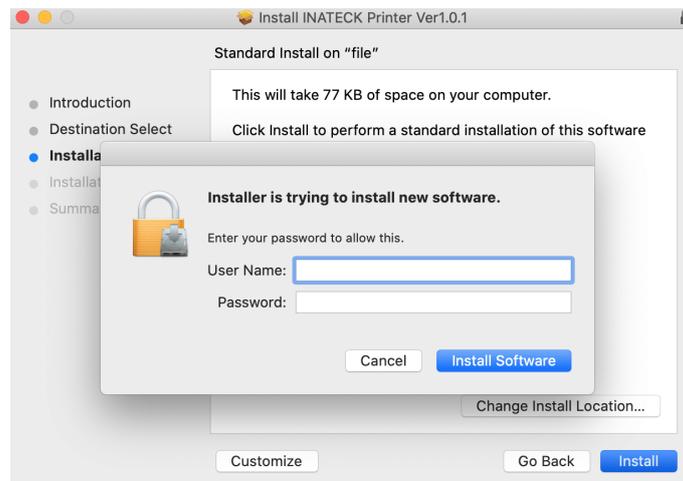


4) Click "Close" to finish.

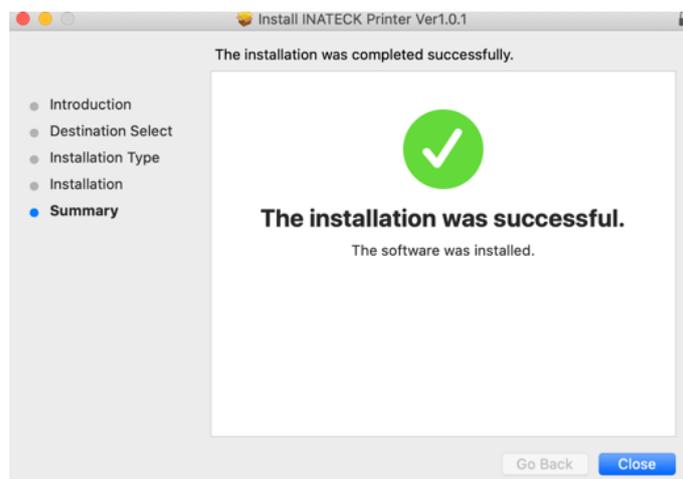


Step 3. Open "System Preferences" and click "Printers and Scanners".




Step 4. Click "+" to add a new printer.

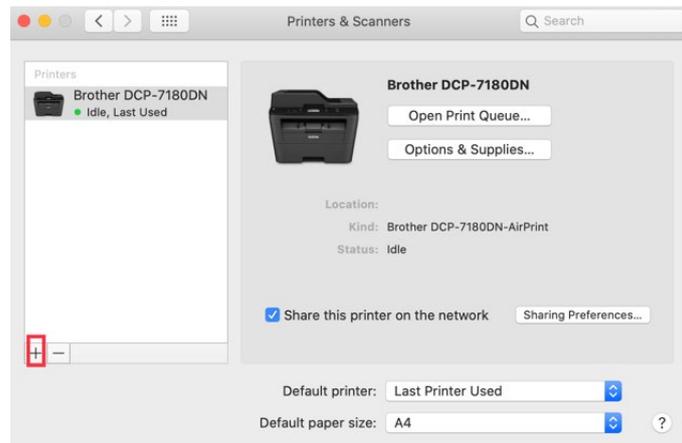


step 5. Turn on your printer, and choose "inateck PR02001", select "Select Software" under "Use" drop down menu

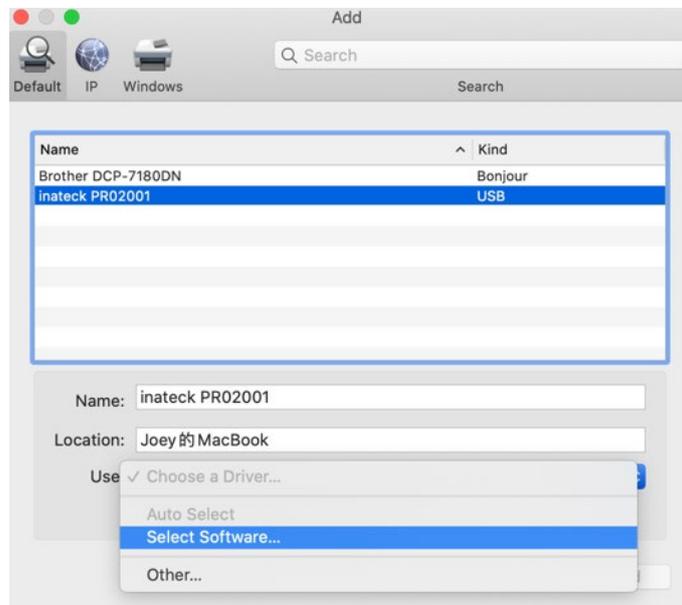


Step 6. Input "INATECK Label Printer" to search and choose, and then click "OK".

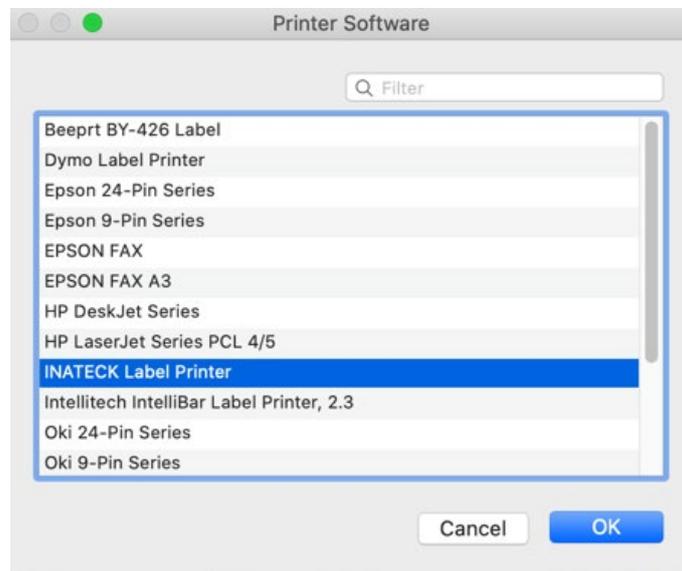

Step 7. Click "Add" to finish. If you see a warning window, click "repair" to continue.

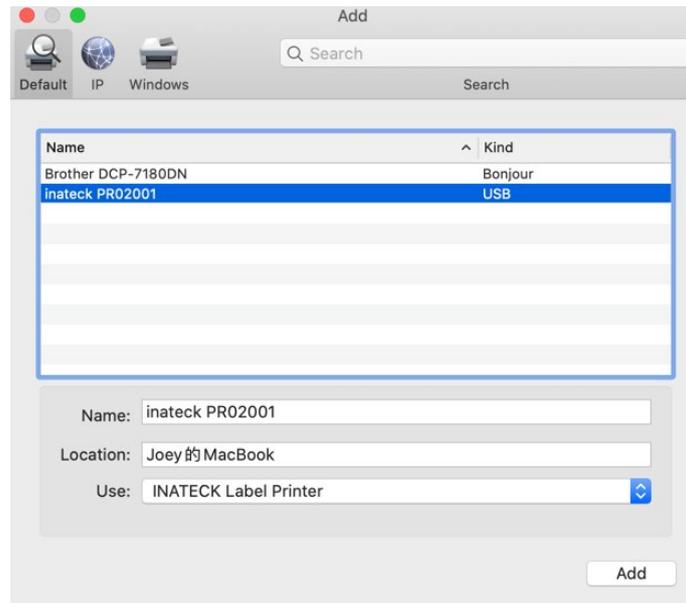


Step 8. Finish

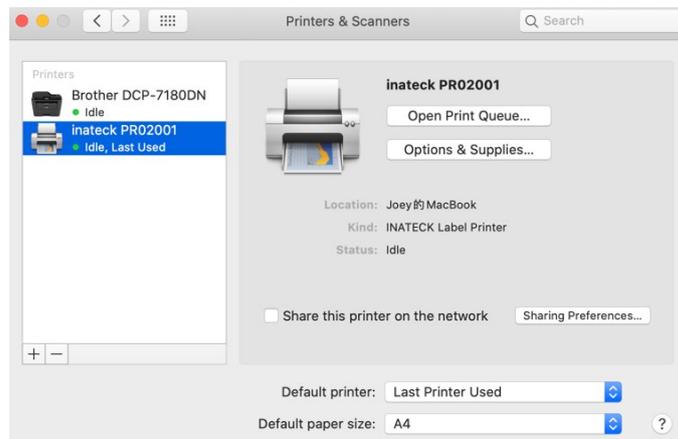


How to change the setting of the printer, and how to define label size (Preview)


Step 1. Now you can print a Sample 4x6 label PDF file to test the printer. (You can also open "Sample.pdf" file in download driver file), Select "File"-> "Print".

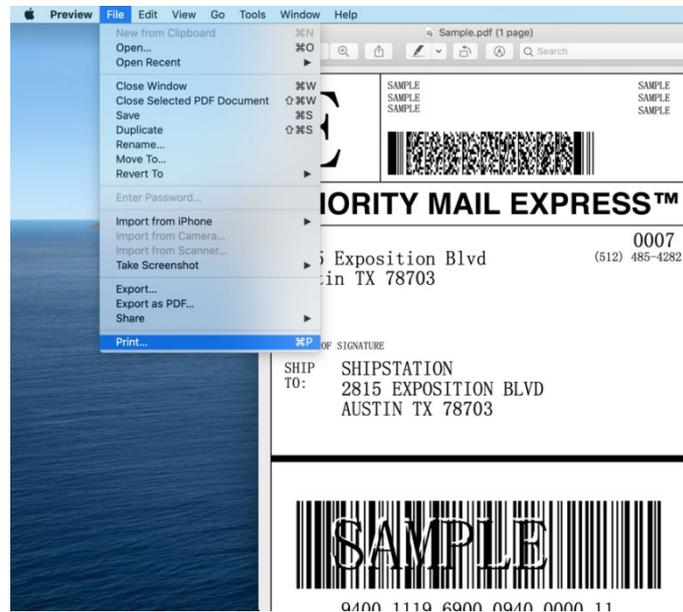


Step 2. Select the paper size "TP01001-1" or 4 * 6 (TP01001-1 is the model of the Inateck direct thermal paper that comes with the product, whose size is 4 * 6 inches).

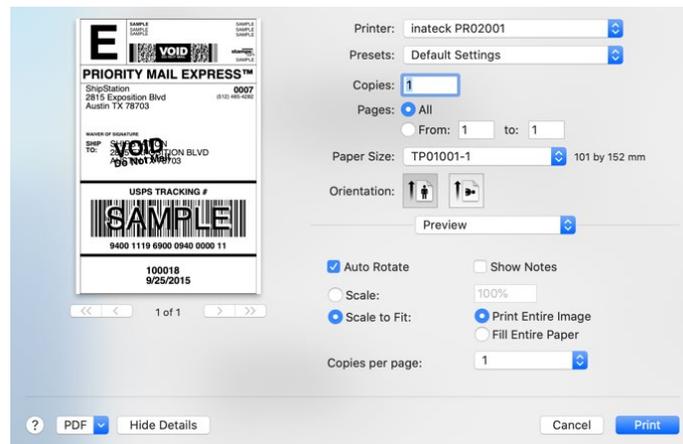



1) You can also Choose “Manage Custom Sizes” under “Paper Size” drop down menu.

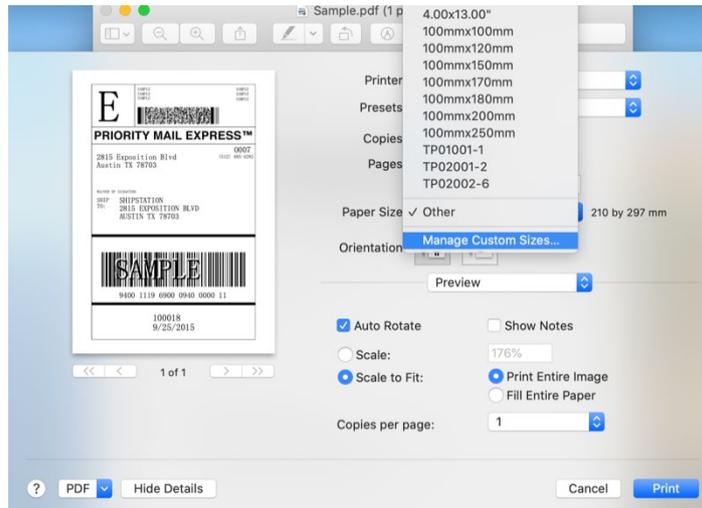


2) Click “+” to define a new label size, click “OK” to save.

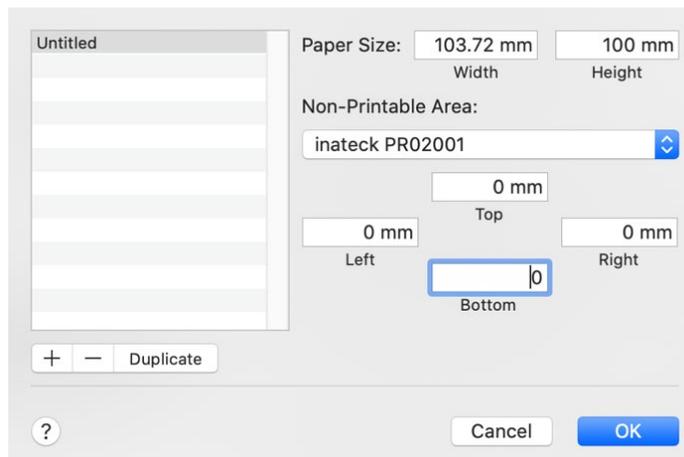

Step 3. You can change setting of the printer in "Printer Features" sheet.

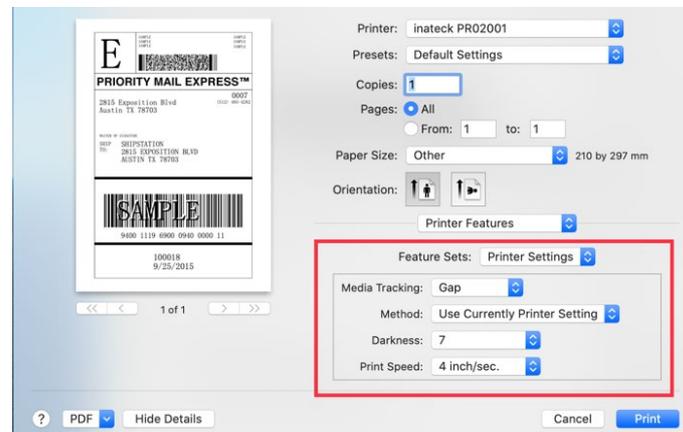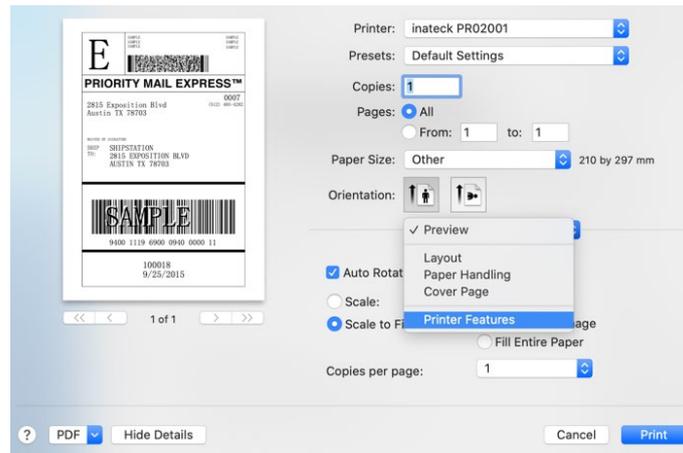

After your finish the settings in “Printer Features”, you can choose to save and name the settings in the “presets”.

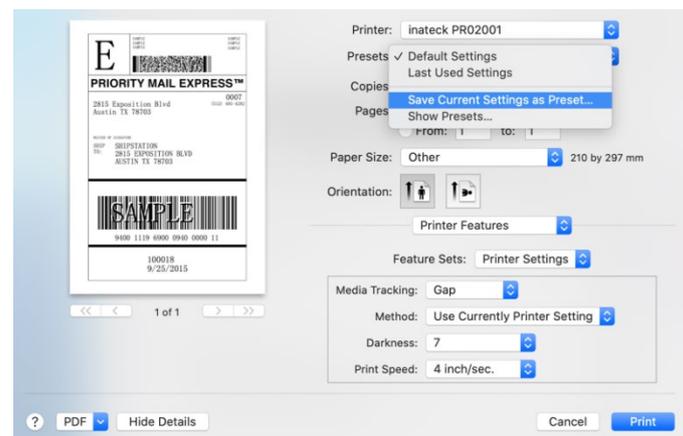

Step 4. Click “Print”.