# VAVA

MODEL: VA-LTS005
100" 16:9 ADJUSTABLE ALR SCREEN
FOR UST PROJECTOR
**User Guide**

**Thank you for choosing the VAVA Projection Screen. Please read this User Guide thoroughly before use and retain it for future reference.**

With the constant optimization of the projector, instructions in this User Guide may not be totally applicable to the actual product.

## IMPORTANT SAFETY INSTRUCTIONS

**READ AND FOLLOW ALL SAFETY INFORMATION AND INSTRUCTIONS. KEEP FOR FUTURE REFERENCE.**

## ⚠ CAUTION

For optimal projection, safe installation and long lasting use of the screen, please always follow below instructions carefully:

- Always handle the screen on a clean, level surface covered with clean cloth, film, etc.
- Gently hold and put down the unit to avoid any damage to the screen surface.
- Do not touch the screen surface by hand. Before handling the screen, put on the pairs of gloves to avoid fingerprint, dust or hand oil on the screen surface.
- Do not poke the screen surface with any sharp or hard objects to avoid scratches or tears.
- It is recommended to clean the screen once every two weeks.
- Wipe clean the screen with a soft cloth and lukewarm water. For general dust, use a soft brush (rough towels or cloth may damage the screen) to clean the screen surface.
- Do not clean with abrasive detergent, solvent or other coarse chemicals to avoid permanent damage to the screen surface.

- You may notice a slight smell for first-time use, which will dissipate over time. If the smell is too strong, open a window to ventilate the room.
- Children should be supervised to ensure that they do not play with the screen.
- Please contact your local dealer for repair or maintenance. For any questions or concerns, please email us at support@vava.com or call us at (877) 969-8282.

**READ AND SAVE THESE INSTRUCTIONS**

## Package Contents
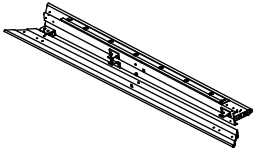
| | | |
|---|---|---|
| 2 x Inner Frames (Expand to form a quadrilateral) | 2 x Struts (With hooks) | 1 x Struts (Without hooks) |
| 4 x Outer Frame I (one bevel) 2 x Outer Frame II (two bevels) | 1 x ALR Screen | 4 x Inner Frame Corner Connectors |
| 2 x Inner Frame Connectors | 4 x Fiberglass Strips (Short) 2 x Fiberglass Strips (Long) | 4 x Corner Protectors |

## Package Contents

| | | |
|---|---|---|
| 4 x Wall Hangers | 18 x M4*8 Screws (For Strut and Outer Frame) | 28 x M5*8 Screws (For Inner Frame Connectors) |
| 2 x Anti-dirt Gloves | 2 x Hexagon Wrenches | 8 x Wall Anchors with Screws |
| 2 x Hooks | 1 x Wall Drilling Template | |

## How to Setup

1. Unpack the frames and place the packaging material underneath to keep them protected.
2. Please wear the included protective gloves before handling in case of scratches from metal parts.

## Assemble the Inner Frames

1) Take out the two Inner Frames.
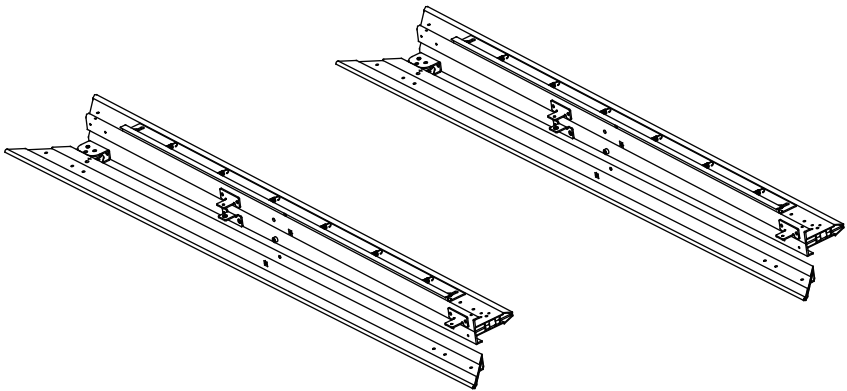
2) Expand the Inner Frames.

Inner Frame I
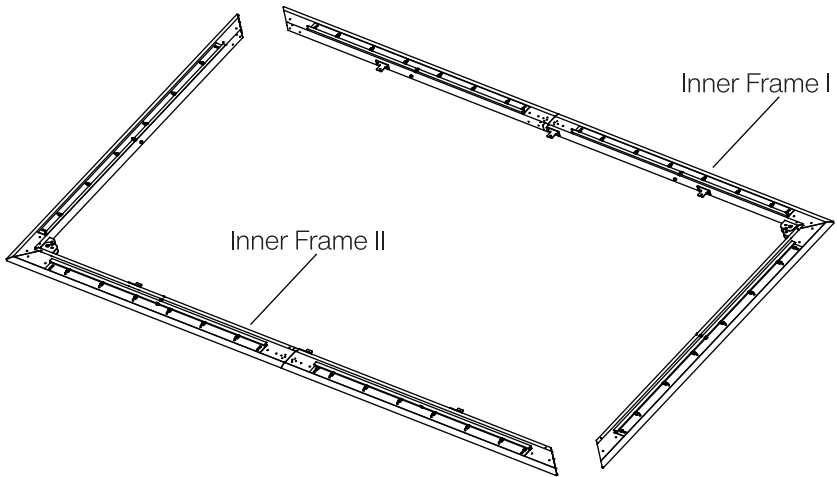
Inner Frame II

3) Fix the Inner Frame Connectors.

2 x Inner Frame Connectors

12 x M5*8 Screws



16 x M5*8 Screws

4 x Inner Frame
Corner Connectors

4) Assemble the Struts.

18 x M4*8 Screws

Without hooks

With hooks
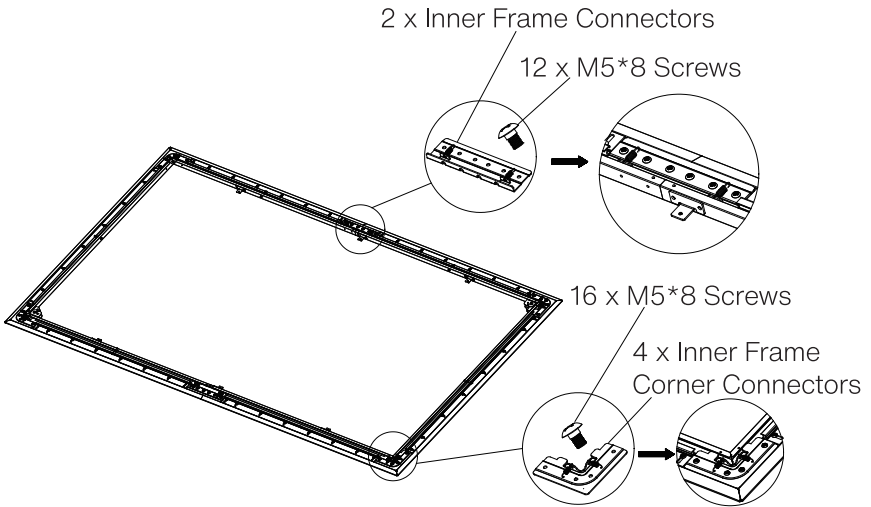
With hooks
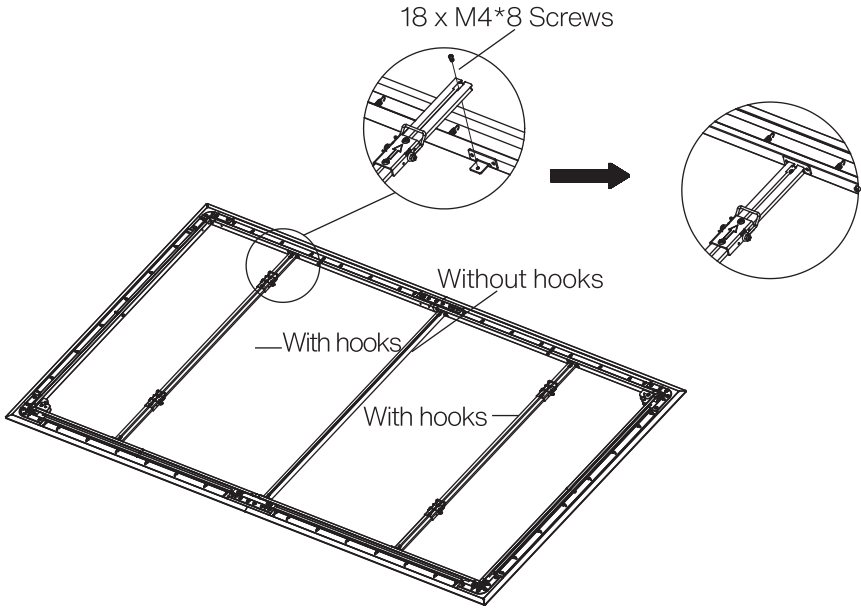
## Assemble the Screen

1) Place a piece of clean and soft cloth or plastic film onto a flat surface.
2) Wear the included anti-dirt gloves before handling the screen to avoid fingerprint smudges.
3) Unpack the screen, gently unroll it onto the cloth or plastic film with its back facing upwards.

Black side facing upwards
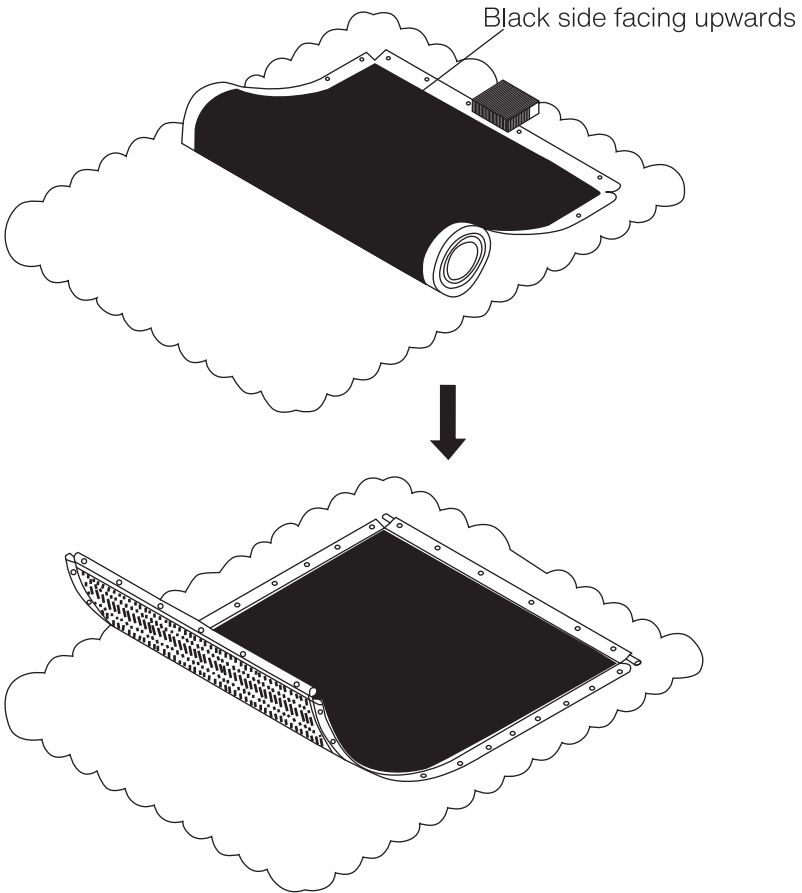
4) Insert the fiberglass strips into the screen sides: 1 longer strip into the short screen side, 2 shorter strips into the long screen side. Make sure the shorter ones in the long screen sides are well aligned with each other.

Fiberglass strips
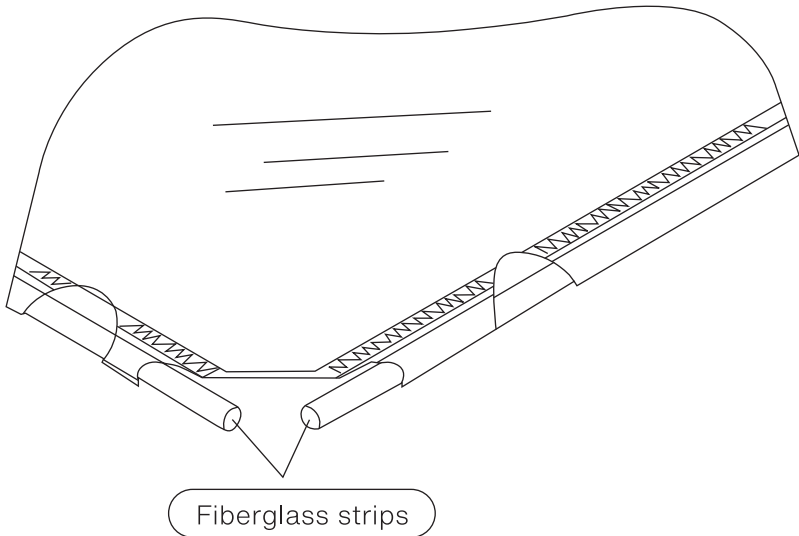
5) Put the installed inner frame onto the back side of the screen.

Inner Frame

Screen

Black side
facing upwards

Black side
facing upwards

Inner Frame
(Align the four
corners of the screen
and inner frame well)
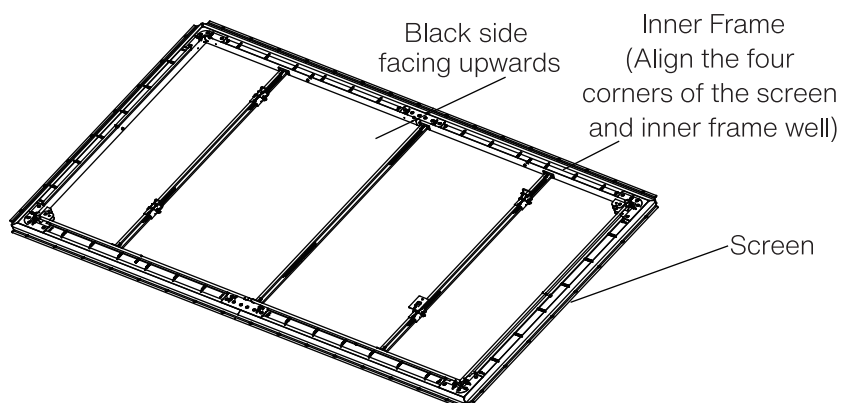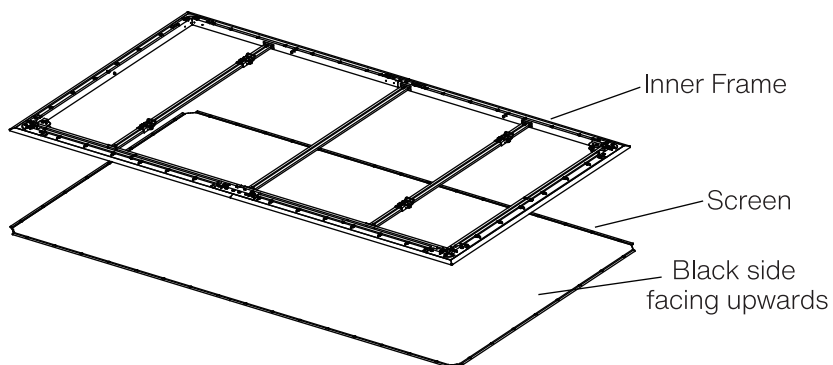
Screen

6) Attach the screen onto the inner frame using the tension springs. Install the tension springs to the four corners in the sequence 1~3 first. Then install the other tension springs to both sides from the frame center as shown below (please pull the springs with force at the same time).



Hook for pulling the spring
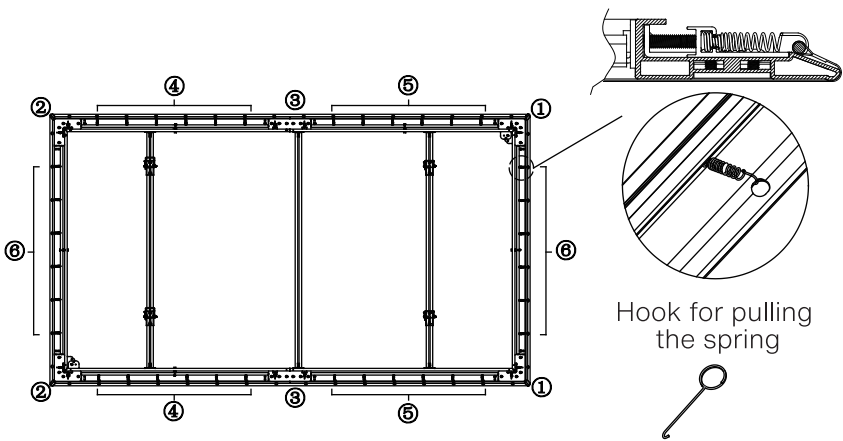
## Note:

- Pull the tension springs with hooks.
- Hang the tension spring on the fiberglass strips.
- It is strongly recommended that two people pull the tension springs on opposite sides at the same time.

7) Place the screen upright to check its evenness. If the screen is not stretched tight, tighten through the six adjusting bolts (A as shown below).



Loosen

Tighten
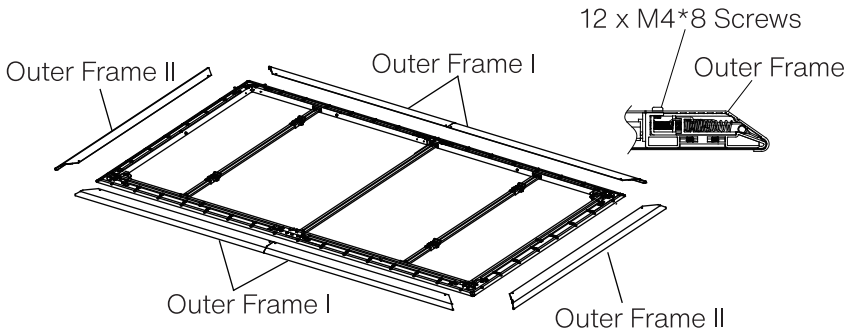
Hexagon Wrench for adjustment
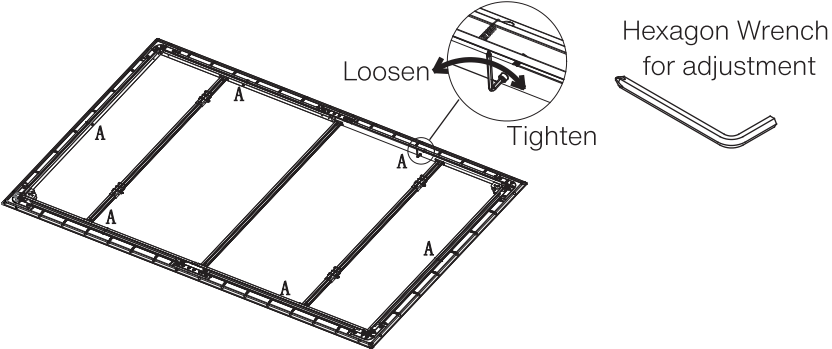
## Assemble the Outer Frames and Corner Protectors

1) Place the outer frames against the border of the frame, align the four corners. Fix the inner frames with the outer ones using the included M4*8 screws.

12 x M4*8 Screws

Outer Frame II

Outer Frame I

Outer Frame

Outer Frame I

Outer Frame II

2) Fix the plastic corner protectors onto the four corners. Make sure they are well aligned with the outer frames in case of falling.

Outer Frame
Corner Protector
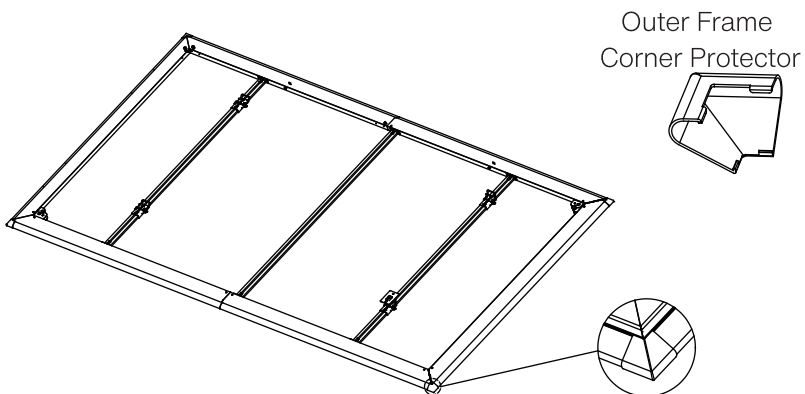
## Mount the Screen onto Wall

1) Mount the wall hangers onto the wall with a horizontal distance of 130cm / 51.2in and vertical distance of 70cm / 27.6in. Please estimate the location of the screen to be mounted as per the projector used. Generally, distance between the lower edge of the frame and ground is 60-80cm / 23.6-31.5in.tt
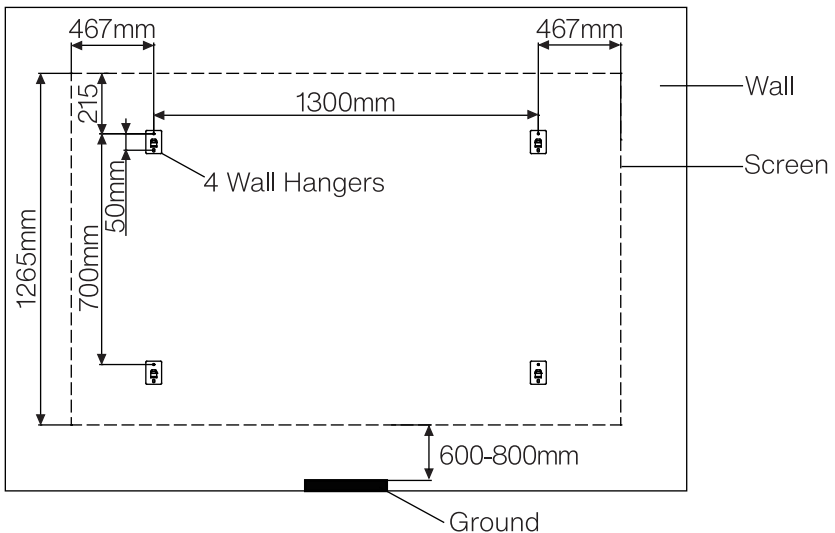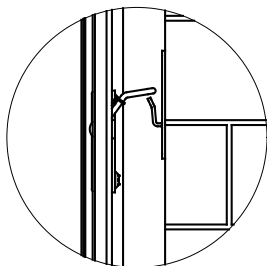


Note: Fix one hanger first, then use the wall drilling template to facilitate locating the position of the remaining hangers.

2) Mount the screen onto the wall as shown below.
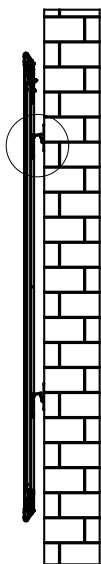
Before

After
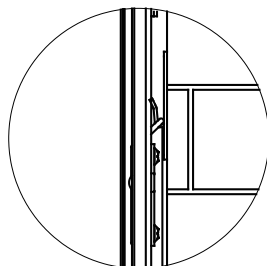
# Screen Height Adjustment

1) Adjust the screen height via the height adjusters on the struts if you have already fixed the wall hangers.
2) The height adjusters on the struts are locked to "0" by default.
3) Please adjust as shown below.

Originally set to "0".

Slightly unscrew the two screws, move the adjuster to the desired scale and tighten.

Note: Make sure the four height adjusters are set to the same scale.

## Specifications

| Model | VA-LTS005 |
|---|---|
| Projection Area | 2214 x 1245 mm / 87.2 x 49.0 in |
| Aspect Ratio | 100" 16:9 |
| Dimensions | 2234 x 1265 x 27 mm / 88.0 x 49.8 x 1.1 in |
| Net Weight | 15.2kg |

## Warranty and Service

We will provide you with after-sales service based on specific local policies. Please contact your local sales representative or after-sales team for more details.
For any questions or concerns, please email us at support@vava.com or call us at (877) 969-8282 (Monday-Friday: 9:00 – 17:00 PST).

# VAVA
www.vava.com

## ASIA PACIFIC
E-mail: support.jp@vava.com(JP)
JP Importer: 株式会社SUNVALLEY JAPAN
Address: 〒104-0032 東京都中央区八丁堀3丁目18-6 PMO京橋東9F

## EUROPE
E-mail:
support.uk@vava.com(UK)
support.de@vava.com(DE)
support.fr@vava.com(FR)
support.es@vava.com(ES)
support.it@vava.com(IT)

## NORTH AMERICA
E-mail: support@vava.com
Tel: 1-877-969-8282 (Monday-Friday: 9:00 – 17:00 PST)

## MANUFACTURER
Manufacturer: Shenzhen NearbyExpress Technology Development
　　　　　　　Co.,Ltd.
Address: Floor 7, Building E, Galaxy World Phase II, Shenzhen, China

## ⚠ WARNING
Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CE Made in China　　　　　　　VA-LTS005_V1.0_EN