


A21

Instruction Manual

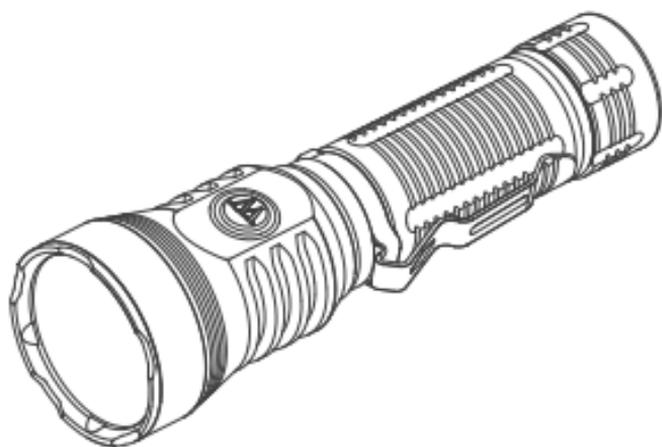

WUBEN[®]
SINCE 1981

WARNINGS


- Please read the manual carefully before using.
- This product will generate heat while being used, please be cautious with it to avoid accident.
- Please do not shine it directly into eyes to avoid causing blindness.
- Please put the product where children can not reach.
- Please use Wuben battery or Wuben recommended batteries.
- Please do not disassemble and repair the flashlight by yourself, or it will not be guaranteed any longer.

Product List


Before using this product, please check whether the contents of the package are complete.




A21 x 1 (With Battery)



Holster x 1



Hand Strap x 1



Waterproof Ring x 2



TYPE-C Charging Cable x 1



(Manual/Warranty Card /Certificate) x 1


Product Features

A21 is a powerful flashlight applied to outdoor and camp lighting. Equipped With 1*XHP70 CREE LED, the Max output is up to 4200 Lumens. The power supply is designed with 1*21700 battery and built-in Type-C charge, which is more convenient to use.


- Utilizes CREE XHP70 LED emitter with 100,000 hours lifespan.
- Powered by 1*21700 battery. Max output is up to 4200 lumens. Max beam distance is up to 222 meters. Max run time is up to 110 hours.
- Built in Type-C charging port, 5V2A fast charging.
- High strength aerospace aluminum body. Aluminum alloy vacuum electroplating reflective cup.
- Double - side coated anti-scratch optical lens with up to 99% transmittance.
- Intelligent low power warning. Reverse polarity protection. Intelligent temperature control design, digitally regulated output maintains constant brightness.
- Waterproof level IP68 (2m underwater 1 hour) . Impact resistance 1.5 meter. Tail stand upside down function.

Product Operation


1. Product Structure

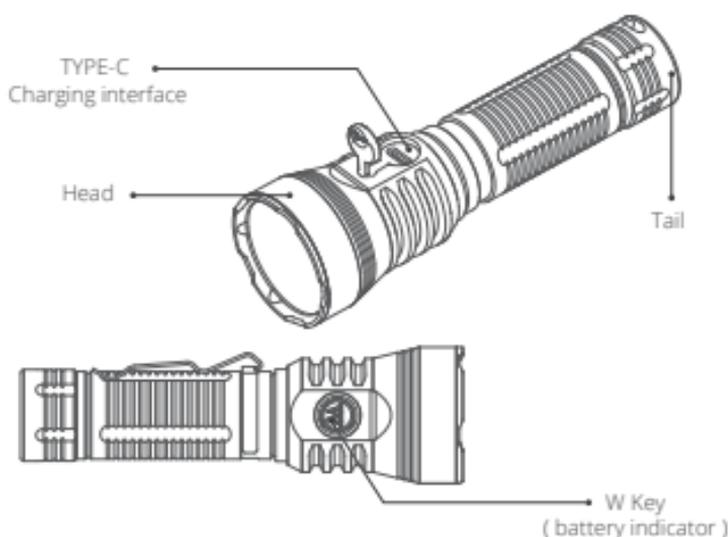

2. Installation

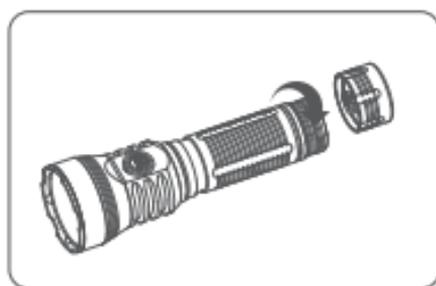

① Please screw off the tail switch

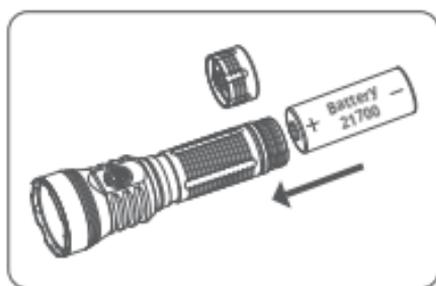

② Please Insert the battery with positive pole pointing

3. Default outputs selection

Single click on the switch to turn on the light, then single click on the switch to cycle through Moon-Low-Med-High-Turbo. Press and hold to turn off the light.

4. Continuous outputs selection

Double click on the switch to turn on the light, then press and hold to go through brightness from Moon to Turbo continuously, then Turbo to Moon, release to select brightness in between.

5. Flashlight Mode

When the light is on, double click on the switch will switch between Strobe mode and SOS mode, single click to get back to constant on mode.

6. Instant Turbo

When the light is on, press and hold to get into instant turbo, single click to turn it off.

7. Lockout

When the light is off, triple click on W switch to lockout, the light will blink to indicate. When the light is lockout, operations on the switch will activate the blue light in switch to indicate lockout status, except triple click on the switch to unlock it.

8. Charging

Please make sure the light is off before charging. Connect USB charging cable with the light and adapter of 5V /2A to charge. It takes about 3h to fully charge the light (based on 5V /2A adapter).

Charging tip: Red light on when charging and blue light on when fully charged. Once charging is completed, please remove the charge cable.

Low power warning :

Power 100%~80%	Blue light constant (Turns off after 5 seconds)
Power 79%~30%	Blue light flashes (Turns off after 5 seconds)
Power 29%~15%	Red light
Power under 15%	Red light flashes

Parameters

FL1 Standard	Turbo	High	Med	Low	Moon	SOS
	4200 LM	1200 LM	400 LM	130 LM	5 LM	4200 LM
	2h- 4h	5h	8.5h	20h	110h	/
	222m			1.5 m		
	12854 cd			IP68		
Size	135.5mm x 42mm (L x D)					

 The above data tested in WUBEN laboratory, may fluctuate due to a variation in the testing instruments.

Included Accessories

Holster and 21700 battery.

Maintenance

- O ring may lose its effectiveness over time and need to be replaced with the spare O ring to ensure the flashlights water resistance.
- We recommend only a WUBEN brand battery.

- Charge or replace the battery when the power is low.
- Clean the battery contact points with alcohol and wipe clean as necessary.
- When not in use we recommend removing the battery for safe storage.
- Store the flashlight only in a well ventilated and dry place.

Troubleshooting

Problem	Reason	Solution
Abnormal flashing or no bright	Check whether the switch is opened properly	Open the switch
	Checked whether the assembly is in the right place	Tighten the assembly parts
	Check whether the battery is charged	Charger the battery
	Check whether the battery is anti-loading	Remove the battery re-assembly
	Check if the battery contact points are dirty	Use alcohol to clean
Noise	Check whether there is a foreign body fall	Pour foreign body
	Parts damage	Return to the local dealer

Warranty

1. Category

- Free replacement : WUBEN will replace a new product within 15 days of purchase for any manufacturing defects if problems arise during normal use.
- 1 year warranty :Since the date purchased, within one year if product fails to work because of quality problem, Wuben will offer free repair service.
- 5 years warranty: WUBEN offers free repair for any manufacturing defects if problem arose during normal use, as long as the end user has registered the product on

WUBEN's official website.

- Limited lifetime warranty : After 5 years, WUBEN will repair the light but the user will be responsible to pay for parts and shipping.

2.Warranty does not cover :

- Any modifications to the light.
- Misuse or abuse.
- Damage caused by long term storage with the battery not removed.
- Normal wear and tear.
- Wuben is not responsible for the shipping charges.

SHENZHEN SHENGQI LIGHTING TECHNOLOGY., LTD

E-mail: info@wubenlight.com Web: www.wubenlight.com

Add: 209 Building C, 1970 Industrial Zone, Minzhi, Longhua District, Shenzhen, China

Zip Code: 518131



wubenlight.com