AIR PURIFIER

USER MANUAL



High Clean Air Delivery Rate



3-Stage Filtration System



Low Noise Level



Child Lock



WARRANTY

- MOOKA warrants the included hardware product and accessories for 12 months from the original date of retail purchase. If you want to extend your warranty for 12 more months, please do not hesitate to contact us.
- Become a MOOKA member and get access to exclusive benefits, such as updates about the latest MOOKA products.

CONTACT US

Please scan the QR-code to start chatting (Live chat).





warranty.mookashops.com

IMPORTANT SAFEGUARDS 1

Please follow the further recommendations to avoid personal injury or product damage. $% \label{eq:please}$

WARNING/ATTENTION



WARNING

Please read the important safeguards carefully before using this applianc



ATTENTION

It reminds that misusing or mishandling may cause hurt.



FORBID

The operation cannot be performed or forbidden.



FORCE

A certain operation should be performed (mandatory).

2 IMPORTANT SAFEGUARDS





Please supervise your children and avoid them from touching or using appliance.



Do not handle the plug with wet hands. It may cause electrical shock.



Do not disassemble, repair, or reconstruct the appliance. It may cause an electric shock, fire hazard, or getting an injury. Contact the authorized retailer for item repairing.

NO DISASSEMBLE



Check if the voltage indicated on the appliance corresponds to the local power voltage before you connect the appliance. Other electric appliances used simultaneously may cause the socket to be hot or cause the fire.

TECHNICAL FEATURES 3

DEODORIZING PERFORMANCE


*Pre-filter, HEPA filter

Activated carbon filter removes formaldehyde, benzene, xylene, toluene,

TVOC and other harmful gases effectively.

Low resistance H13 HEPA filter traps 99.97 percent of tiny particles or droplets in the air that are two and one half microns or less in width.

FILTRATION PROCESS DIAGRAM




4 PRODUCT INTRODUCTION

MOOKA AIR PURIFIER WITH HI3 HEPA AIR FILTER DIAGRAM



PRODUCT INTRODUCTION 5

CONTROL PACEL DIAGRAM

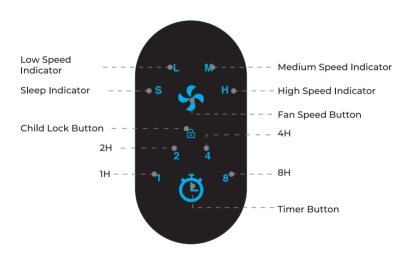

6 USE AND OPERATION

GETTING STARTED

Do not block the air inlet and outlet, e.g. by placing items on the air outlet or in front of the air inlet closer than 30cm.

Make sure that foreign objects do not fall into the air purifier through the air outlet.

Do not use the appliance in wet areas or in surroundings that are high ambient temperature.

FILTER

The filter should be replaced every 3-6 months.

Fan speed indicator flashes when the filter replacement is needed.

After the filter has been replaced, press and hold the fan speed button for 3

seconds to reset the filter lifetime counter.

Removing the filter

- 1. Switch the appliance off and unplug it.
- 2. Invert the equipment.
- 3. Rotate the base cover counter-clockwise to take out the filter.
- 4. Remove the filter as soon as the base cover will be opened.









REPLACING THE FILTER 7

Installing the filter

- 1. Please remove the new filter protective film before installation.
- 2. Rotate the base cover clockwise properly until the filter is installed securely.





EXTERNAL POWER SOURCE

DC Adapter





Power socket

Adapter

8 SAFETY TIPS

Make sure the filter is installed properly before switching the appliance on. A large amount of dust may cause malfunctions.

Do not use a power adapter that is not compatible with the product.

Check if the voltage indicated on the appliance corresponds to the local power voltage before you connect the appliance.

Please check if the appliance is securely connected to the power socket before use

In case of a power outage:

- 1. Unplug the AC plug out of the power adapter.
- 2. Unplug the DC plug out of the unit.

POWER SETTING


- After power-on, all lights on the display screen are on for self-check After the self-inspection is completed, all the displays are off and enter the standby state.
- In standby mode, touch the top power switch to turn on, the wind speed key is on by default after power on, and the low speed indicator is on. The fan runs at low speed and the atmosphere light is on. Touch the top power switch again to turn off and the machine enters the standby state.



- When the air purifier is powered on, press and hold the "Backlight" button for 3 seconds to turn the backlight off.

Proceed the same procedure to turn the backlight on.

Note: the backlight does not correlate with the night mode features.



SETTING FAN SPEED

Briefly press the "Fan Speed" button to set the required fan speed level. Press again to switch the fan speed level. Adjust the fan speed level according to the order depicted below.



SLEEP MODE


The air purifier filtration speed is adjusted to the lowest airflow speed. After the sleep mode was set, the light intensity of the appliance will be switched off in 10 seconds.

Note: Timer cannot be applied to sleep mode.



TIMER

Use the "Timer" button to set the appliance operating duration. Press the "Timer" button to pick the required duration of operating time (1, 2, 4, or 8 hours). Air purifier shuts off automatically at the end of the selected period.

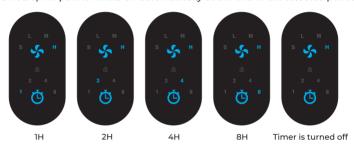

CHILD LOCK

Press and hold the "Timer" button for 5 seconds to activate the child lock. The child lock symbol " " lights on. When the child lock is on, none of buttons are responsive.

Press and hold the "Timer" button for 3 seconds again to deactivate the child lock.



Child lock on

Child lock off

MEMORY FUNCTION

Your fan speed and backlight settings remain the same in case of a power outage. $\,$

But the picked operating duration will be reset.

14 TROUBLESHOOTING

If the appliance works not properly please check the most common problems you could encounter at the table below.

Problem	Possible solution		
The appliance does not work	Please check if the power cord is plugged into the socket properly.		
	Please check if the base is installed properly.		
Odor cannot be removed.	Check if the filter is installed properly. Please ventilate the operating area before purifying.		
	The filter is dirty. Please replace the filter.		
The appliance is loud during the operating.	Please check if the filter protective film is removed.		
	The filter is dirty. Please replace the filter.		

If the problem cannot be solved according to the information above, please contact the authorized retailer for item repairing.

TECHNICAL PARAMETERS 15

Model No.: B-D02L

Power supply: DC 24V/1A

Net Weight: 3.52 LB

Noise level dB(A): ≤20dB(A)

Power consumtion (W): 16W

Dimensions (wxdxh): 180x 180x292(mm)


Multi-function filter

Size: 135×135×145 (mm)

Life time: 3-6 months

CUSTOMER SERVICE

Our customer service team is standing by to assist you if you have any questions or concerns.





Scan QR-code & Start Chatting



- 1-855-666-9955
- support@mookashops.com
- www.mookashops.com

MOOKO Beyond Elegance



Made in China