
## ADAPTOR DATASHEET



## 1.85MM(FEMALE)-GPPO(MINI-SMP)(FEMALE)

## 1.85/GPPO-KK

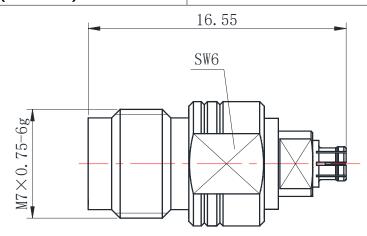

## \*Dimensions are in mm

onnector 1 Type	1.85mm Female
Connector 1 Impedance	50 Ohms
Connector 1 Polarity	Standard
Connector 2 Type	GPPO(MINI-SMP) Female
Connector 2 Impedance	50 Ohms
Connector 2 Polarity	Standard
Connector Mount Method	None
Adapter Body Style	Straight
ricquericy	טכ נט טי טרוב
Frequency	DC to 67 GHz
Insertion Loss (dB)	≤ 0.08 √ f(GHz)
Insertion Loss (dB)	
Insertion Loss (dB) VSWR /Return Loss	≤ 0.08 √ f(GHz) ≤1.3 to 67 GHz
Insertion Loss (dB) VSWR /Return Loss  Materials Information	≤ 0.08 √ f(GHz) ≤1.3 to 67 GHz
Insertion Loss (dB) VSWR /Return Loss  Materials Information Center Contact	≤ 0.08 √ f(GHz) ≤1.3 to 67 GHz
Insertion Loss (dB) VSWR /Return Loss  Materials Information Center Contact Outer Contact	≤ 0.08 √ f(GHz) ≤1.3 to 67 GHz  CuBe Gold Plated
Insertion Loss (dB) VSWR /Return Loss	≤ 0.08 √ f(GHz) ≤1.3 to 67 GHz  CuBe Gold Plated CuBe Gold Plated
Insertion Loss (dB) VSWR /Return Loss  Materials Information Center Contact Outer Contact Body Dielectric	≤ 0.08 √ f(GHz) ≤1.3 to 67 GHz  CuBe Gold Plated CuBe Gold Plated Stainless Steel
Insertion Loss (dB) VSWR /Return Loss  Materials Information Center Contact Outer Contact Body	≤ 0.08 √ f(GHz) ≤1.3 to 67 GHz  CuBe Gold Plated CuBe Gold Plated Stainless Steel
Insertion Loss (dB) VSWR /Return Loss  Materials Information Center Contact Outer Contact Body Dielectric  Environmental Data	≤ 0.08 √ f(GHz) ≤1.3 to 67 GHz  CuBe Gold Plated CuBe Gold Plated Stainless Steel PEI

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology, Inc.	
12630 H Westminster Ave., Santa Ana, CA 92706	6
www.gwavetech.com	