

开箱和检查附件

请小心从包装箱中取出产品，我们建议您在废弃包装材料前确认包装内是否含有下表列出的物品。

若有任何物品在递送过程中丢失或损坏，请与经销商进行联系。

附带的附件

物品	单位	数量
高级蓝牙耳机	个	1
对讲机无线适配器	个	1
硅胶耳帽	个	2
充电器线	条	1
说明书	本	1

产品介绍

对讲机蓝牙耳机

本产品可同时适配两个设备，内置对讲机专用无线发射“PTT”键与环境降噪功能，实现同时双守候且对讲机信号优先通话当蓝牙处于手机通话或多媒体音频播放模式时对讲机接收信号进来时自动转入对讲机通话状态对讲机通话结束 8秒后自动返回多媒体模式。

蓝牙已连接对讲机时，需增配手机蓝牙连接时，配对后需关机后重新启动。

- 1、对讲机专用PTT按键

2、开关机键

●长按2秒开机，再长按2秒关机。

●长按6秒进入蓝牙配对状态。

●听歌状态按一下 暂停，再按继续播放。

●当电话来时按一下 接听，再按一下 结束通话。

3、音量 (+) 键

●通话时，按一下音量加大一格。

●听歌是按下音量增大一格，长按下一首。

4、音量 (-) 键

●通话时，按一下音量减小一格。

●听歌时按下音量减小一格，长按上一首。

5、耳机听筒

6、USB充电接口

7、指示灯

8、其他功能

●降噪：同时按下 开关机键 和 音量- 键

●中英文提示音切换：同时按下 开关机键 和 音量+键

●清除所有配对：同时按下音量+键 和音量- 键，听到“嘟嘟”两声提示音表示清除成功。
- 

对讲机无线适配器

多功能按键

- 1、开/关机：长按2秒开机，长按3秒关机；

2、配对

在关机状态下长按按键，进入配对状态（红灯与蓝灯交替闪烁）

●蓝灯或红灯闪烁表示正在自动配对

【蓝牙耳机】或【无线PTT】，此时

【蓝牙耳机】也设置为配对状态，当配对成功时，蓝灯红灯停止快闪。
- 3、启动/停止发射

在待机状态下按一下启动发射（红灯长亮），在按一下停止发射（红灯灭）；
- 4、开机电池电量提示

长按2秒开机，红灯闪烁的次数表示电池电量 闪4下满电，闪一下电量低。

信息指示灯

蓝色状态指示慢闪：表示已开机，处于待机状态。


蓝色状态指示快闪：表示蓝牙耳机联接中断，请查看蓝牙耳机是否开机或超距离。

红灯亮：红灯亮表示处于发射状态，当收到发射请求是红灯常亮，发射结束红灯灭。


低电提示警示：在待机装态下红灯闪烁表示电池电量低，请及时充电。

安装/卸下对讲机无线适配器

- 安装：将适配器插口端插入对讲机耳机口即可（见图1）
- 卸下：将适配器从对讲机耳机口拔出即可。（见图2）

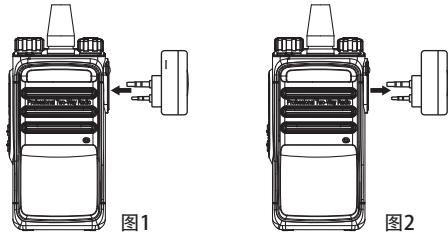

无线PTT（选配）

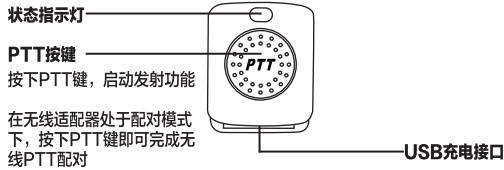

无线PTT键配对

多功能按键处于配对状态时，多功能按键红灯闪烁表示正在自动配对无线PTT键，此时按一下要配对的无线PTT键的PTT键，配对成功红灯灭。

充电说明

产品采用MINI USB充电端口设计，可以用标准的5V DC电源供电进行充电（电脑USB口、移动电源、手机充电器等），充电时红灯亮，充满电后红灯灭。

## Unpack and Check Accessories

Please remove the product from the pack box carefully, please check whether the box contains all items listed in the table below before the pack box. If any items is lost or damaged during delivery, please contact seller.

### All Items

Ite	Unit	Quantity
Advanced Bluetooth Headset	PCS	1
Two Way Radio Bluetooth Adapter	PCS	1
Silicone Ear Tips	PCS	2
Charging Cable	PCS	1
User Manual	PCS	1


## Product description

### Walkie talkie bluetooth headset(Enhanced version)

This product can adapt two devices at the same time. It is equipped with built-in walkie-talkie dedicated wireless "PTT" button and environmental noise reduction function. It achieves simultaneous dual standby and radio priority calls when the bluetooth headset is in a mobile phone call or multimedia audio playing mode. When the two way radio receives a signal, it enters the intercom call state automatically. When intercom call ends, it returns to multimedia mode automatically after 8 seconds.

When a bluetooth headset is connected to a walkie-talkie and it needs to be connected with a mobile phone at the same time, please turn off the bluetooth headset, pair the bluetooth headset and the mobile phone. When the bluetooth headset connects with the mobile phone successfully, restart the bluetooth headset. It will connect the walkie-talkie and the mobile phone automatically.


1. Walkie talkie "PTT" button ( )
2. On/Off button ( )
  - Long press 2 seconds to turn on, then long press 2 seconds to turn off.
  - Long press 6 seconds to enter bluetooth pairing.
  - Press to pause and continue when you are listening to music. ( )
  - Press to answer the phone call. Then press again to end the call. ( )
3. Volume up button
  - Press the button to turn up the volume.
  - Long press 2 seconds to previous song.
4. Volume down button
  - Press the button to turn down the volume. ①
  - Long press 2 seconds to next song.
5. Headset earphone
6. USB charging port
7. Indicator
8. More functions
  - Noise reduction: press Power and Volume + button (②+④) simultaneously.
  - Language switching: press Power and Volume - button (②+③) simultaneously.
  - Pairing elimination: press Volume + and Volume - button (②+③) simultaneously. You will hear beep.



### Walkie -Talkie wireless adapter

#### Two Way Radio Bluetooth Adapter Pairing

- 1: On/Off  
Long press Multi-function button for 2 seconds, blue light glints, power on. Then long press Multi-function button for 3 seconds, red light glints, power off.
2. Pairing  
When the bluetooth adapter is TURNED OFF, long press the Multi-function button for about 7 seconds to enter pairing status. ( Red and blue light glint alternately. )
3. Put the wireless PTT key and the bluetooth adapter together. Press the wireless PTT key's button for about 1 second. The Bluetooth adapter's red light disappear. It Means the wireless PTT key is paired with bluetooth adapter successfully.
4. Put the bluetooth adapter and the bluetooth headset together(both are red and blue lights glint alternately). Wait for about 40 seconds(first pairing). When their alternant red and blue lights disappear and only blue light glints. It means the bluetooth earpiece is paired with bluetooth adapter successfully.



## Indicator Light

**Blue light flashes slowly:** power on, in standby mode.

**Blue light flashes fast :** the bluetooth connection is interrupted, please check whether the bluetooth earphone is turned on or has exceeded the bluetooth connection distance


**Red light on:** device is transmitting. When it is over, red light off.

**Low battery tips:** In standby mode, the red light flashes means low battery, please charge in time.

### Installation/ Removal

**Installation:** Insert the adapter into the intercom port. (figure 1)


**Removal :** unplug the adapter from the intercom port.(figure 2)

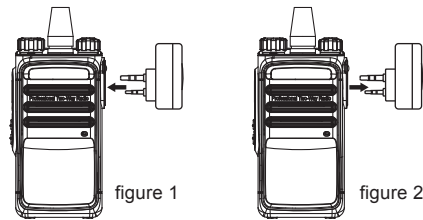

### Wireless PTT key

Indicator light

PTT Button  
( Press PPT button to transmit;  
PTT Pairing Refer Page 5)

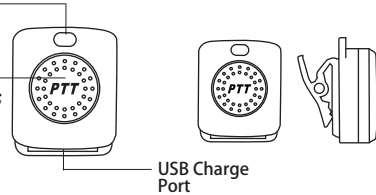

### Charging Instructions:

This product uses MINI USB charging port. It can be charged by standard DC 5V power supply(computer's USB port, power bank).When it is charging--red light on. If it is full charged-- red light off.

# Walkie talkie bluetooth headset

## 对讲机蓝牙耳机挂 K/M口