


GameSir X1 FPS DOCK

User Manual

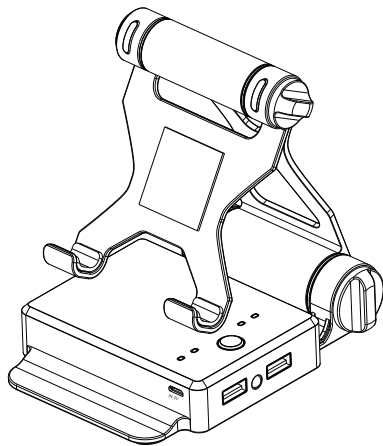

WE HOPE THIS MANUAL ANSWERED ANY QUESTIONS YOU MAY HAVE HAD, IF YOU HAVE ANY FURTHER QUESTIONS, PLEASE CONTACT US:

 GameSir Facebook: <https://www.facebook.com/myGamesir>

 Customer Service: cs@gamesir.hk

 Support: <https://gamesir.hk/pages/gamesir-x1-z2-fps-dock-firmware-tutorial>



1. PRODUCT DESCRIPTION

GameSir X1 FPS DOCK is the innovative docking station to bring you the unprecedented PC gaming experience of the mice and keyboard control on the smartphones via Bluetooth connection! It is exclusively designed for FPS games and compatible with Android smartphones. Connect GameSir X1 to your Android devices and it will automatically identify input devices without ROOT. With FPS DOCK app for both iOS and Android, you can now enjoy the hot FPS games with your keyboard and mouse with a next level of control experience!

2. DETAILED SPECIFICS

PRODUCT NAME	GameSir X1 FPS DOCK	PRODUCT MODEL	Gamesir-X1
WORKING PLATFORM	Android 4.0 or above / iOS 7.0 or above	WORKING TEMPERATURE	5°C-65°C
		WORKING HUMIDITY	20 - 80%
WORKING MODE	Android Primary Protocol	CONNECTION	Bluetooth
CHARGING VOLTAGE	5V	CHARGING TIME	2-3 hrs
CHARGING CURRENT	1A - 1.5A	WORKING DISTANCE	Approx. 23.0 ft
PACKAGE SIZE	6.88 x 5.12 x 1.57in.	BATTERY CAPACITY	3000mAh
PRODUCT SIZE	5.31 x 4.02 x 1.22in.	NET WEIGHT	0.61lb

3. PRODUCT OVERVIEW

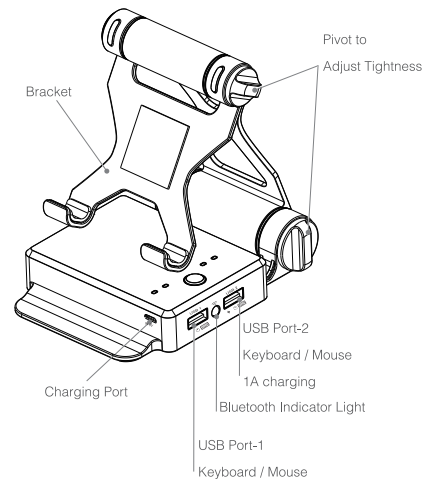

4. HOW TO USE

For Android users



Step 1

Please scan the QR code above to download and install FPS DOCK.

Step 2

Connect X1 to Android device via Bluetooth, then launch FPS DOCK APP and click "Keep running in background".

Step 3

Enter a game, click "FPS DOCK" icon in the upper left corner, then click "Setting" icon. If it is the first time to run FPS DOCK APP in this game, click "Write config", then select the official config. At last, click "Close" icon to save the configuration and quit the setting.

Step 4

If you want to show or hide the key mappings, please click "Show / Hide" icon, then click "Close" icon to save and quit.

Step 5

You can customize any keys by dragging them to wherever you like, then click "Close" icon to save the configuration and quit the setting.

Step 6

You can add key mappings by pressing the phone screen for 2 seconds. The red question icon will appear, and tap the key you want to add on keyboard, then the red question icon will change to the key you tapped. At last, click "Close" icon to save the configuration and quit the setting.

Step 7

You can delete key mappings by dragging the key to "Trash" icon. Then click "Close" icon to save the configuration and quit the setting.

Note:

- You can customize key mappings in training map before playing.
- If all the keys have been configured, there is no need to launch the FPS DOCK APP the next time.
- If key mapping does not work after flipping the phone, please press Ctrl + X buttons simultaneously.
- The FPS DOCK firmware does not apply to Android phones / tablets with MTK chips.

For iOS users:



Step 1

Please scan the QR code above to download and install FPS DOCK.

Step 2

Turn on Bluetooth on iOS device and power on X1, then connect keyboard to X1. Press Ctrl + F2 buttons on the keyboard simultaneously, you will find X1 named "FPS-DOCK_I_*****" on the list of Bluetooth devices. Click it to pair.

Step 3

Take a screenshot of the control panel of the game you want to play.

Step 4

Launch FPS DOCK APP and click "Game mapping config", then click "Screenshot" icon to add the screenshot of a game control panel.

Step 5

You can add key mappings by pressing the phone screen for 2 seconds. The red question icon will appear, and tap the key you want to add on keyboard, then the red question icon will change to the key you tapped. In addition, you can customize any keys by dragging them to wherever you like. You can also delete key mappings by dragging the key to "Trash" icon.

Step 6

You can add D-pad and visual angle function by clicking "Direction" and "Mouse" icons after clicking "Key" icon. Meanwhile, you can click "Direction" icon to adjust the radius of D-pad.

Step 7

Once the custom configuration is complete, click "Save" icon and input a custom name.

Step 8

Click "Config" icon to choose the official configuration or custom configuration.

Step 9

You need to click "Save" and "Download" icons to write the configuration to your phone and you can start to play.

Note:

- You can customize key mappings in training map before playing.
- You can customize key mappings with FPS DOCK APP while playing.
- The default mode is Android mode and X1 is named "FPS-DOCK_****" on the list of Bluetooth devices, you need to press Ctrl + F2 buttons simultaneously to switch to iOS mode and the name of X1 will change to "FPS-DOCK_I_*****". If you want to switch from iOS mode to Android mode, press Ctrl + F1 buttons simultaneously.

5. BATTERY SAVE MODE

The GameSir X1 will automatically turn off when there is no operation for 30 seconds.

6. HOW TO CHARGE GAMESIR X1 FPS DOCK?

Please plug an USB cable into the charging port to charge the X1. Remind that some keyboard and mouse have high-power consumption, please make sure your X1 has enough power when you playing.