


**CROSS BARS ROOF RACK FOR  
2014-2016 NISSAN ROGUE  
INSTRUCTION MANUAL**

**CROSS BARS ROOF RACK FOR  
2014-2016 NISSAN ROGUE  
INSTRUCTION MANUAL**



# Installation Manual





## PACKAGE INCLUDE:

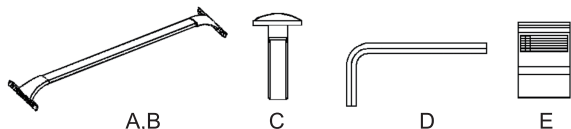

1 \* Front Crossbar 1 \* Rear Crossbar 8 \* M6 Torx Bolt (26mm Long)  
1 \* T30 Torx Wrench 1 \* Installation Manual

## Pre-installation Warnings, Cautions, Critical Step and Notes:

- \* Read the Installation Manual recommend.
- \* Removal and re-installation of cross bars requires purchase of new M6 bolts or the re-application of Thread locking adhesive.
- \* Do not attempt to adjust fasteners on the underside of the brackets. Fasteners are pre-adjusted to the proper torque requirement by the manufacturer.



8-9n-m(71-80 in-1bs)

# Installation Manual

## INSTALLATION STEPS:

- (1) Loosely install 4 bolts on Front (FR) cross bar.
- (2) Secure forward bolt on driver side first and then secure 3 bolts to proper torque (Pic 3).
- (3) Repeat procedure for rear (RR) cross bar.
- (4) Make sure that bottom surface of cross bar bracket is flush with bottom surface of side rail prior to tightening bolts (Pic 4).
- (5) Place TORX key and installation template in polybag and keep vehicle glove box.
- (6) Make sure that cross bar is properly in place in side rail with attaching holes/slots positioned over rivet nuts before tightening to specification.

## NOTE:

- \* Protect painted area on the vehicle roof under crossbars by placing a piece of cloth under crossbars to prevent damage.
- \* Make sure sunroof is in closed position during installation process.
- \* Arrow points forward.
- \* Each cross bar marked with "FR" or "RR".
- \* Front(FR) cross bar installed on the side rail in front of rear doors.
- \* Rear(RR) cross bar installed on the side rail behind of rear doors.