

Installation & CARE

Tools Required

13mm Socket
Ratchet
Torque Wrench

Part List

- ① ×2 Step Bar
- ② ×6 Bracket
- ③ ×12 M8 Hexagon Bolt
- ④ ×12 M8 Bolt Plate
- ⑤ ×24 M8 Flat Washer
- ⑥ ×24 M8 Hexagon Nut
- ⑦ ×12 M8 Hexagon Bolt (on step bar)
- ⑧ ×12 M8 Flat Washer (on step bar)



Notes

Read this instruction carefully before starting installation.
Proper tools will improve the quality of installation and reduce the time required.
If missing parts or any damage found, please take a picture, and contact us.


Step 1:

1. Locate three mounting positions each side.
2. Remove the factory tape and clean the sealant and dirt around factory holes on mounting positions.
3. Clean the factory threaded holes if equipped.

Step 2A:

For models without factory threaded inserts on rocker panel.


1. Insert the (2) M8 bolt plate into factory hexagon.
Flat plate side in, thread side out.
2. Attach the bracket to threaded end of bolt plate and secure with (2) M8 flat washer and (2) M8 hex nut.
3. Secure the bracket to pinch weld with (2) M8 hex bolts, (2) M8 flat washers, (2) M8 hex nuts.

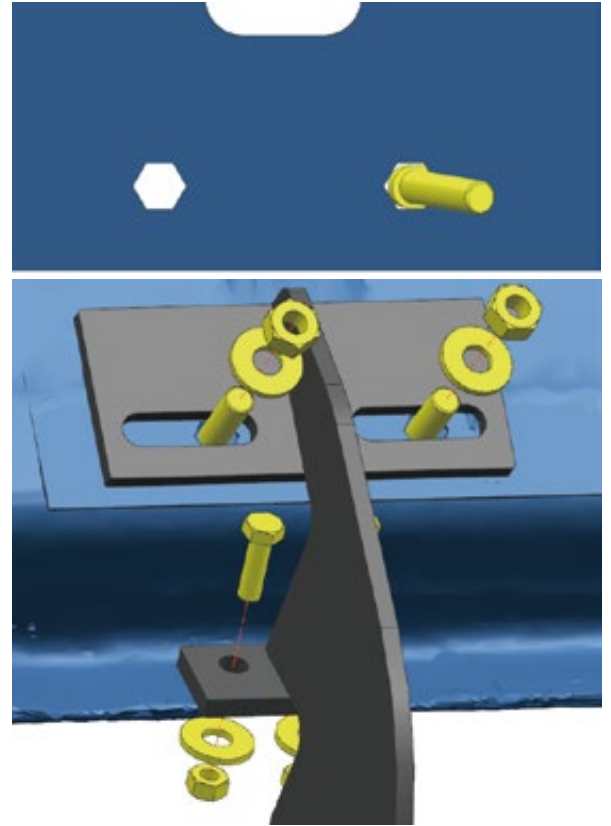

Step 2B:


For models with factory threaded inserts on rocker panel.

1. Attach the bracket to inner rocker panel and secure with (2) M8 hex bolts, (2) M8 flat washers.
2. Secure the bracket to pinch weld with (2) M8 hex bolt plates, (2) M8 flat washers, (2) M8 hex nuts.

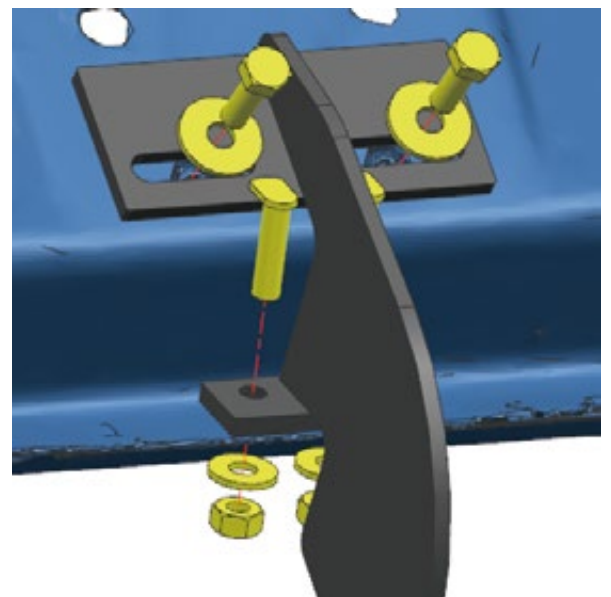


Step 3:

1. Remove (6) M8 hex bolts from the back of step bar.
2. Slide mounting track to proper positions.
3. With assistance, lift and attach the step bar to brackets. Secure the step bar on brackets with (6) M8 hex bolts.
4. Repeat to install the other side step bar, do not fully tighten.

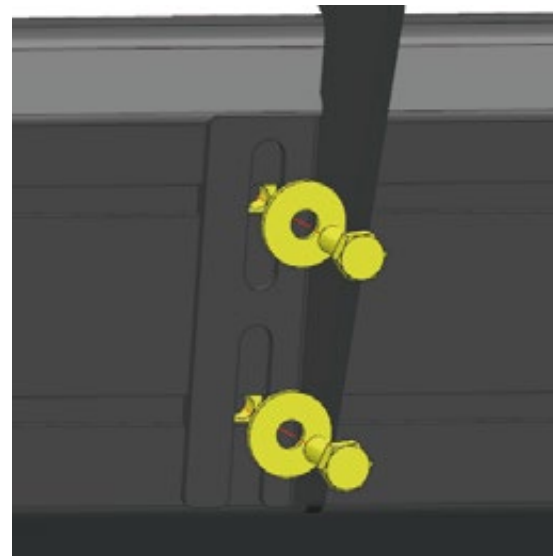

Step 4:

1. Tighten M8 hex bolts and nuts on vehicle with 15 ft. lbs. torque.
2. Adjust the step bar to level and tighten M8 hex bolts with 15 ft. lbs. torque.
3. After the step bar installed, periodic check to ensure all mounting hardware remains secure and tight.

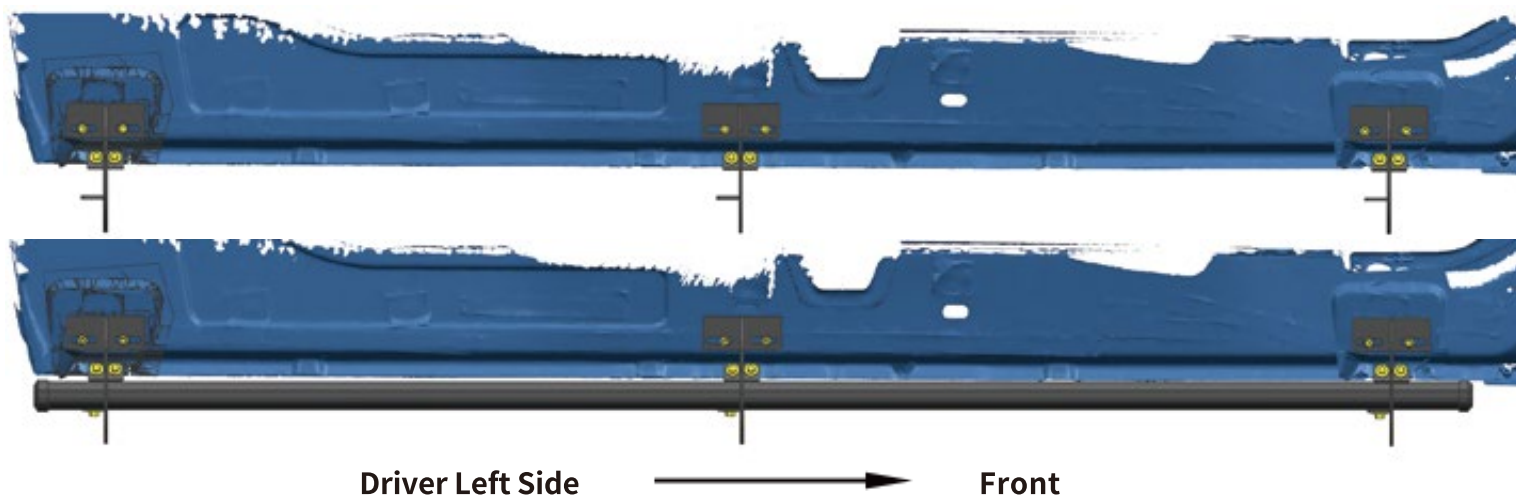

Contact us

If you have any questions regarding the installation of your product, just give us a call Monday through Friday from 8:00 AM-5:00 PM Pacific time

Steps for reference

- ☆Log into your My account.
- ☆Go to My account, select Purchases and find this order.
- ☆Click on "Contact Seller"

Thank you for selecting Running Board.
Your new running board are custom molded to fit your specific vehicle.