

BESTTEN Products

For more products from BESTTEN, please visit our website www.ibestten.com



USB Wall Outlet Surge Protectors



Outdoor Power Stakes



Outdoor Timers



Remote Control Outlets



Metal Power Strips



Light Switches



Screwless Wallplates



Stainless Steel Wallplates



Receptacles



Model: USOT-3-1A

Made in China
Version 1.4

Page 4

BESTTEN®

Outdoor 24-Hour Mechanical Timer with Grounded Outlet and 6-Inch Cord




User Manual

Specifications

AC Outlet	1 Grounded
Power Cord	6-Inch SJTW 14AWG/3C
Input	15A/125V
Max Rating	1875W Resistive/1250W Tungsten/3/4 HP/TV-5
Housing	Fire Resistant PC(V-2)
Working Temperature	-13 to 104°F(-25 to 40°C)

Timer Instruction

- 1.To program the timer: Slide the switch below the timer dial to the \oplus position. Pull up all the pins with a flat head screwdriver. Push the pins down for the desired time you want the timer to be ON. Each pin represents 30 minutes. Repeats daily.
- 2.To set the current time: Rotate the timer dial clockwise until the time aligns the TIME NOW arrow. Note, PM hours are shaded with black color.
- 3.To override the timer: Slide the switch below the timer dial to the \ominus position. When in the \ominus position, the power output will be on permanently.
- 4.In case of power failure: Program the timer and reset the current time as explained in step 1 and 2.

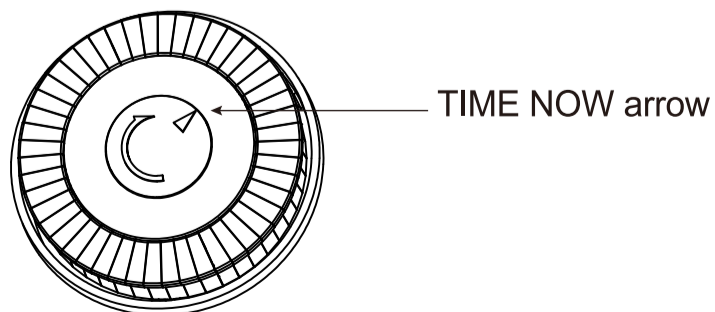

CAUTION:
Please pull the pins up carefully. Excessive force may break the timer pins.

Page 2

Safety Information

CAUTION: Overloading this product could increase risk of fire. Use only with a total electrical draw of maximum 15 amp/1875 watt Christmas tree or other seasonal lighting products.

* If using an outdoor-use cord for an extended period of time (greater than 90 days), please consider hard wiring a permanent outdoor-use receptacle rated for year-round use in the area that power is needed. Please contact a licensed electrician for proper installation of permanent wiring.

* SUITABLE FOR INDOOR/OUTDOOR USE – STORE INDOORS WHILE NOT IN USE.

* PLUG INTO GROUND FAULT PROTECTED RECEPTACLE ONLY.

Warranty

BESTTEN warrants to the original customer that this product is free of defects in materials and workmanship for one year from the purchase date. Within this period, simply contact BESTTEN CARE with proof of purchase and reason of claim. We will replace the product for free.

Any product which is subject to misuse or accidental damage is excluded from this warranty.

support@ibestten.com
1-800-358-6160 (Mon-Fri 9AM-5PM PST)

For more products from BESTTEN, please visit our website www.ibestten.com.

Page 3