

LED Parking Lot Light

Product Description

Eagle Star led Parking Lot light is the perfect option for outdoor area lighting where security and safety is paramount. They replace the traditional Carpark/Court light and add the efficiency of LED technology while maintaining form, fit and function. Constructed of die-cast aluminium is IP66 waterproof, mounting variations and wide range of power options they replace and enhance upon the facility provided by their traditional HID fixture. The normal cable length is 3 ft.



- Voltage 100-277V&277-480V AC 50/60Hz
- PHILIPS LEDS with efficiency 140lm/w
- Lifespan above 50,000 hours
- Qualified with CE, RoHS, cETL, ETL, DLC
- 5 years warranty
- IP 66
- UL LED driver PF > 0.95, THD < 10%, 12KV surge protector
- IES Type III distribution patterns
- Brown Finished
- Optics are interchangeable and easily replaceable
- Dusk to dawn sensor & motion sensor compatible
- Ambient temperature from -40°C to 40°C


Product Parameters

Input power	100W	150W	200W	300W
LED Chips	PHILIPS LEDS			
Lumens	14,000lm	21,000lm	28,000lm	42,000lm
Efficiency	140lm/w	140lm/w	140lm/w	140lm/w
CRI	> 75Ra			
CCT	5000k			
Beam angle	type III			
Input voltage	100-277V & 277-480VAC 50/60Hz			
Working temperature	-40°C Up to 40°C (-40°F up to 104°F)			
Certification	CE, RoHS, cETL, ETL, DLC			
Warranty	5 years			
Replacement	300W	480W MH	600W MH	1000W MH
Piece/Carton	2	2	2	2
G.W	14kg	14.4kg	20.5kg	23.5kg
Carton Size	54 *36 *30 cm	54 *36 *30 cm	70*32 *38 cm	70*32*38 cm

Goods are shipped from CA NY TX Warehouses in the USA. Email: info@eaglestarled.com.

<https://eaglestarled.com/collections/led-parking-lot-light>


Dimensions

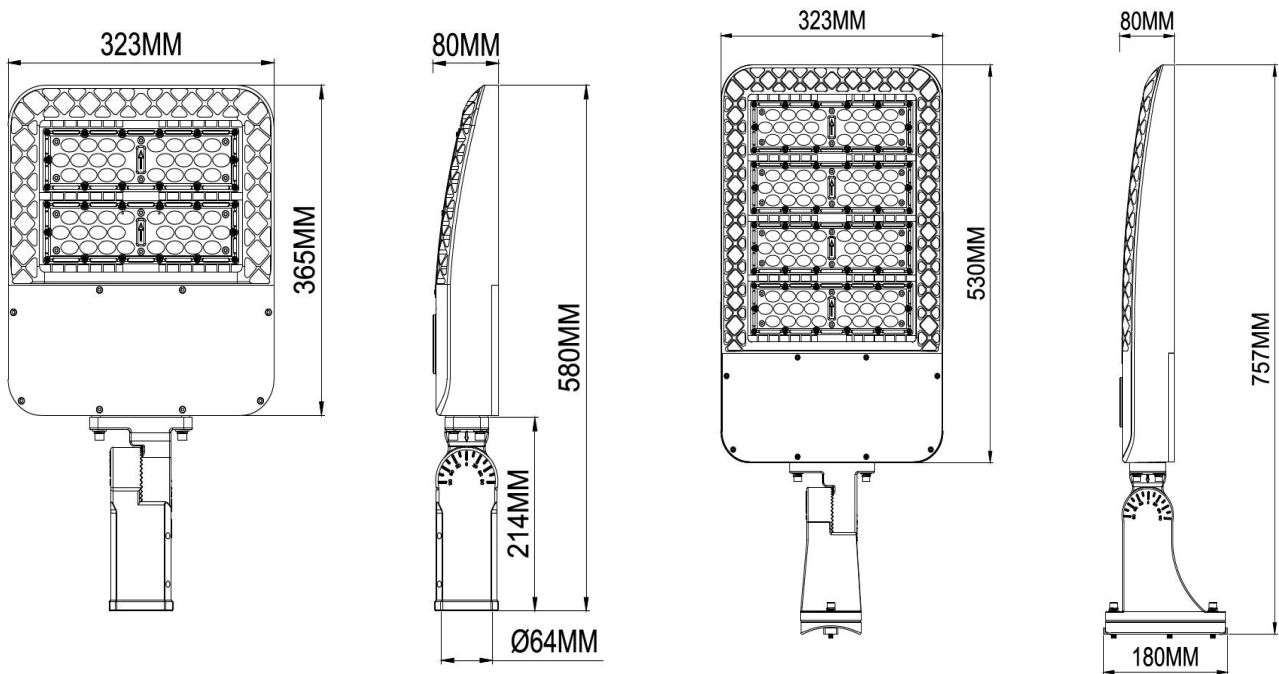

100W/150W


200W/300W

Product Details

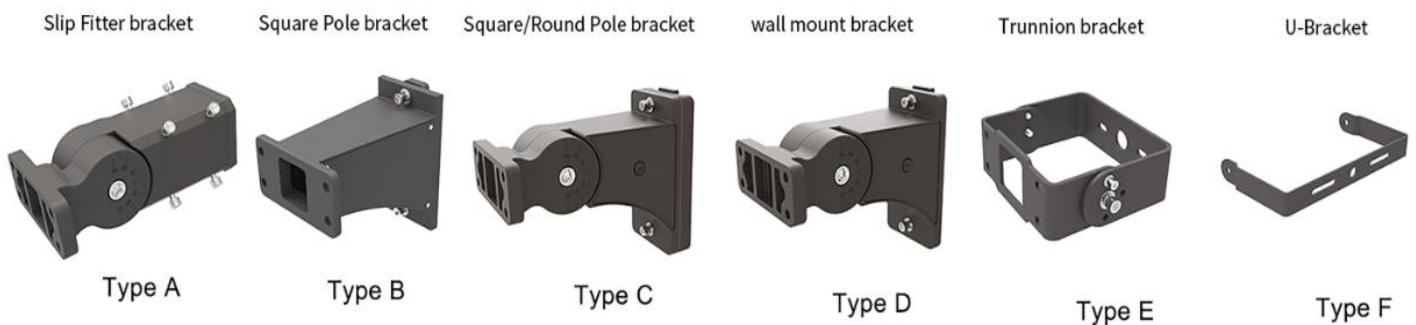


Installation


1.Slip fitter mount (Adjustable Angle : -90° ~ $+90^{\circ}$)

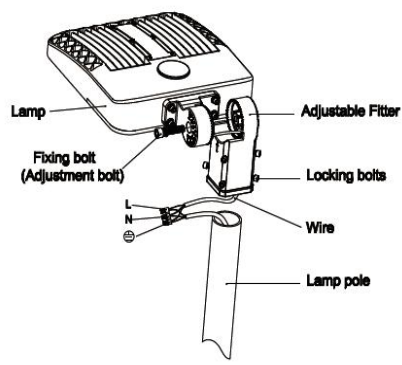


4.Wall Mount (Adjustable Angle : -90° ~ $+90^{\circ}$)

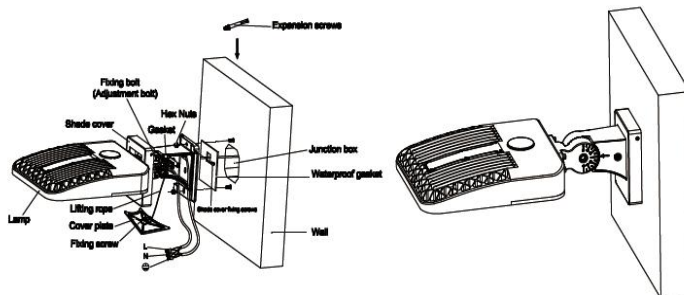


2.Adjustable Square (Adjustable Angle : -90° ~ $+90^{\circ}$)

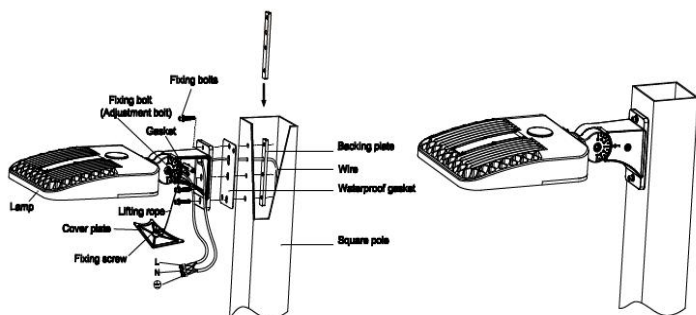

5.Trunnion (Adjustable Angle : -90° ~ $+90^{\circ}$)

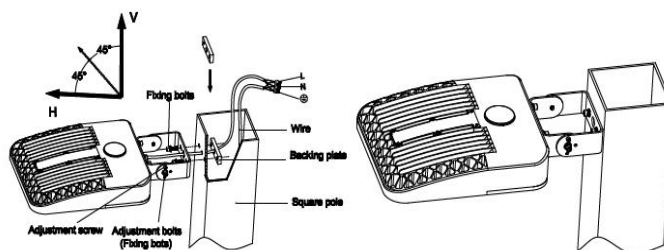

3.Round Pole Mount(Adjustable Angle : -90° ~ $+90^{\circ}$)

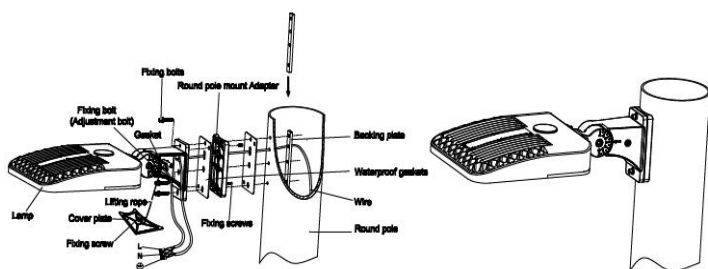

6. U-bracket (Adjustable Angle : -90° ~ $+90^{\circ}$)

