

1306 Connector

LCC1001




LC Premium Unibody Connector Type 2

FEATURES & USE IN

- Solid Body Robust Design to Improve Mechanical Strength
- Designed to Exceed the Requirement of Verizon FOC TPR 9409 Requirement
- Premium Super Low Loss, typ. IL Against Master 0.07 dB
- Premium SM typ. IL Against Master 0.10 dB max.
- Wide Choice of Boot Types
- Crimp Tool to Be Used CRT-701
- Highest Quality LC Connector Series

ORDERING OPTIONS

Order Options	Order Cord	Description
Connector	931	LC Unibody Simplex
	932	LC Unibody Duplex
Ferrule Type	153	SM: Premium 125 µm
	159	SM: Low Loss 125 µm
Housing	3	APC: Green
	B	MINI Boot 900 µm
	C	MINI Boot 2.0 mm
	D	MINI Boot 3.0 mm
Boot Type	1	BTW Boot
	4	2.0 mm Round
	5	2.0 mm Boot Short
	6	3.0 mm Boot
	7	Flex-Angle 2.0 mm
	9	Flex-Angle 3.0 mm
Boot Color	6	Green

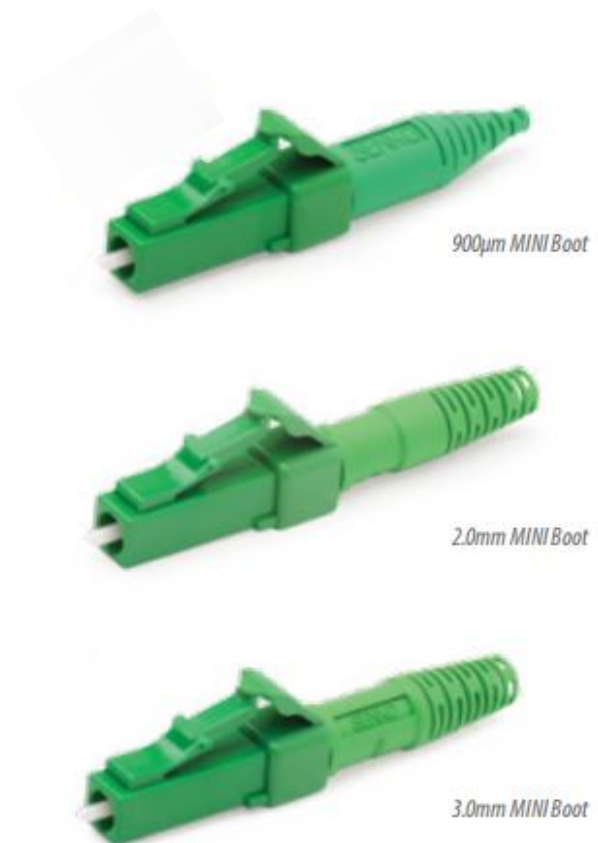

Note: Other ferrule ID size are available SM 126 µm, SM 125.5 µm

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.
1) Connector FC/APC, 900 µm, 1 m by default for all devices except for high power devices.
2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.