

## FEATURES |

- Non-isolated
- Wide input voltage from 11V to 35V
- Stable output voltage is 5V
- 100% full rated power
- 100% burn-in test
- High efficiency up to 95%
- Cooling by free air convection
- Surface mountable
- Input reverse polarity protection
- 2-year warranty
- Over current protection, Over voltage protection
- Over temperature protection
- According to: EN 61000-6-3:2007/A1:2011/AC:2012  
EN 55014-1:2006/A2:2011 EN 60950-1:2006/AC:2011

model	input voltage range (Vdc)	output voltage (Vdc)	output current typ (A)	output power max (W)	ripple and noise typ (mVp-p)	efficiency typ (%)
DN510	11-35	5	10	50	50	95

Note: All specifications measured at 25°C, nominal input voltage, and full load unless otherwise noted.

## INPUT

Parameter	Test conditions or description	Min	Typ	Max	Units
Operating input voltage		11	12/24	35	Vdc

## OUTPUT

Parameter	Test conditions or description	Min	Typ	Max	Units
Line regulation	Measured from high line to low line			±0.2	%
Load regulation	Measured from full load to zero load			±0.2	%
Voltage accuracy				±1.5	%
Adjust range		4.9	5	5.1	V
Temperature coefficient			±0.03		%/°C
No load current			≤ 0.01		A

Power Conversion Solutions from 1W to 200KW

## PROTECTIONS

Parameter	Test conditions or description	Min	Typ	Max	Units
Output over voltage protection	%Vo				%
Output short circuit protection	Continuous				
Current limit	% nominal output current	100	110	120	%
Thermal shutdown case temp			85		°C
Cooling	Free air convection				


## SAFETY AND COMPLIANCE

Parameter	Test conditions or description
Safety approvals	EN 61000-6-3:2007/A1 :2011/AC:2012 EN 55014-1:2006/A2:2011 EN 60950-1:2006/AC:2011

## ENVIRONMENTAL

Parameter	Test conditions or description	Min	Typ	Max	Units
Case operating temperature		-40	25	85	°C
Ambient temperature		-20		60	°C
Storage temperature		-40		105	°C
Humidity	Non-condensing			95	%

## DERATING CURVE

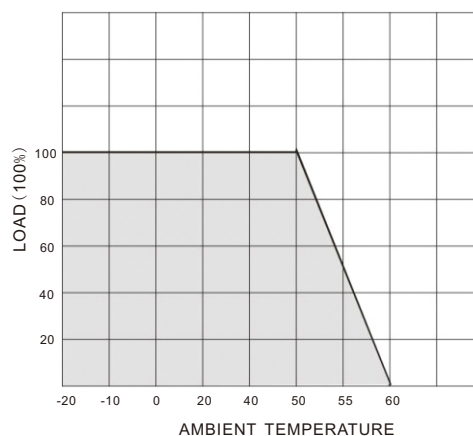


## MECHANICAL

Parameter	Test conditions or description
Dimensions ( L x W x H )	74 x 40 x 17.5mm 2.91x1.57x0.69inch
Wire length	/
Case material	Aluminum
Net weight	40g/0.09lb
Package	1pcs/box, 200pcs/carton
Shipping dimensions	51*35.5*19cm/20.08*13.98*7.48inch
Shipping weight	11.5 kg/25.35lb

## MECHANICAL DRAWING


Screw: M3

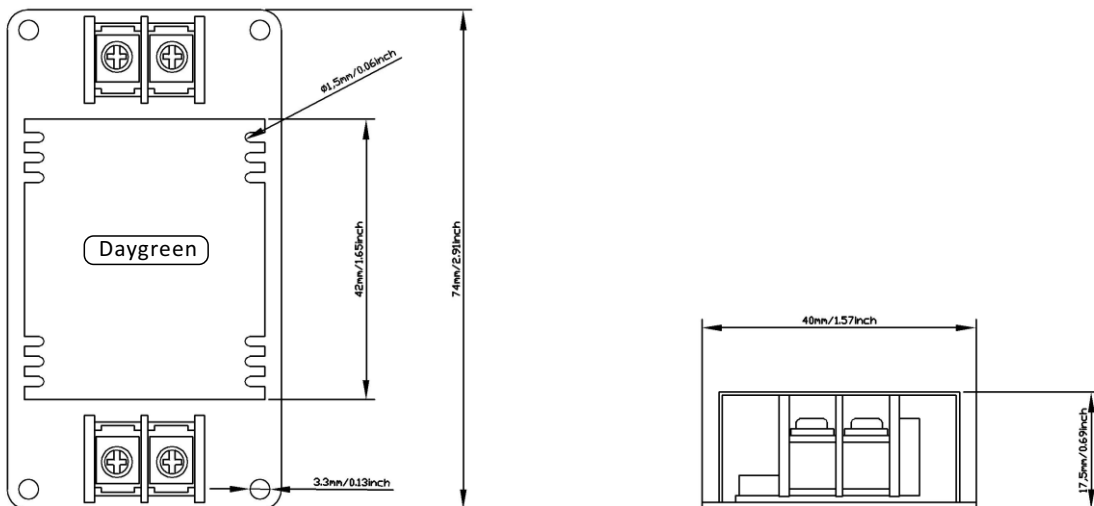

More Models



Distributed by

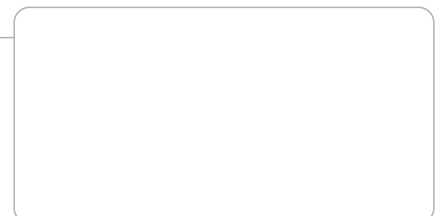

Power Conversion Solutions from 1W to 200KW