

FEATURES

- Non-isolated
- Wide input voltage from 11V to 16V
- Stable output voltage is 24V
- 100% full rated power
- 100% burn-in test
- High efficiency up to 95%
- Cooling by free air convection
- Surface mountable
- 2-year warranty
- IP68 waterproof, Epoxy potting, Anti-vibration, Dustproof
- Over current protection, Over voltage protection
- Over temperature protection
- According to: EN 61000-6-3:2007/A1:2011/AC:2012
EN 55014-1:2006/A2:2011 EN 60950-1:2006/AC:2011

model	input voltage range (Vdc)	output voltage (Vdc)	output current typ (A)	output power max (W)	ripple and noise typ (mVp-p)	efficiency typ (%)
H05-12-24	11-16	24	5	120	150	95

Note: All specifications measured at 25°C, nominal input voltage, and full load unless otherwise noted.

INPUT

Parameter	Test conditions or description	Min	Typ	Max	Units
Operating input voltage		11	12	16	Vdc

OUTPUT

Parameter	Test conditions or description	Min	Typ	Max	Units
Line regulation	Measured from high line to low line			±0.2	%
Load regulation	Measured from full load to zero load			±0.2	%
Voltage accuracy				±1.5	%
Adjust range		23.9	24	24.1	V
Temperature coefficient			±0.03		%/°C
No load current			≤ 0.01		A

Power Conversion Solutions from 1W to 200KW

PROTECTIONS

Parameter	Test conditions or description	Min	Typ	Max	Units
Output over voltage protection	%Vo	115		140	%
Output short circuit protection	Continuous				
Current limit	% nominal output current	100	110	120	%
Thermal shutdown case temp			85		°C
Cooling	Free air convection				
Fuse	built in PCB		20		A


SAFETY AND COMPLIANCE

Parameter	Test conditions or description
Safety approvals	EN 61000-6-3:2007/A1 :2011/AC:2012 EN 55014-1:2006/A2:2011 EN 60950-1:2006/AC:2011
Enclosures	IP68

ENVIRONMENTAL

Parameter	Test conditions or description	Min	Typ	Max	Units
Case operating temperature		-40	25	85	°C
Ambient temperature		-20		60	°C
Storage temperature		-40		105	°C
Humidity	Non-condensing			95	%

DERATING CURVE

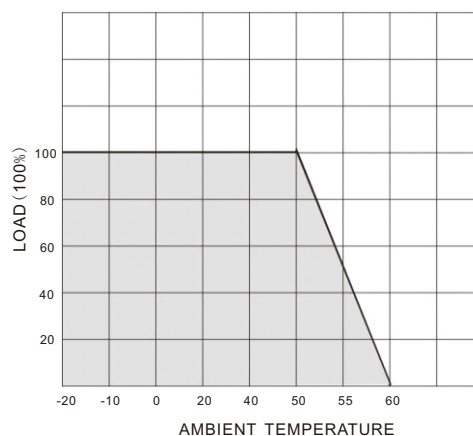


Power Conversion Solutions from 1W to 200KW

MECHANICAL



Parameter	Test conditions or description
Dimensions (L x W x H)	74 x 74 x 31mm 2.91x2.91x1.22inch
Wire length	180mm/7.09inch
Case material	Aluminum
Net weight	280g/0.62lb
Package	1pcs/box, 50pcs/carton
Shipping dimensions	51*34.5*10.5cm/20.08*13.58*3.96inch
Shipping weight	14.9 kg/32.85lb


MECHANICAL DRAWING

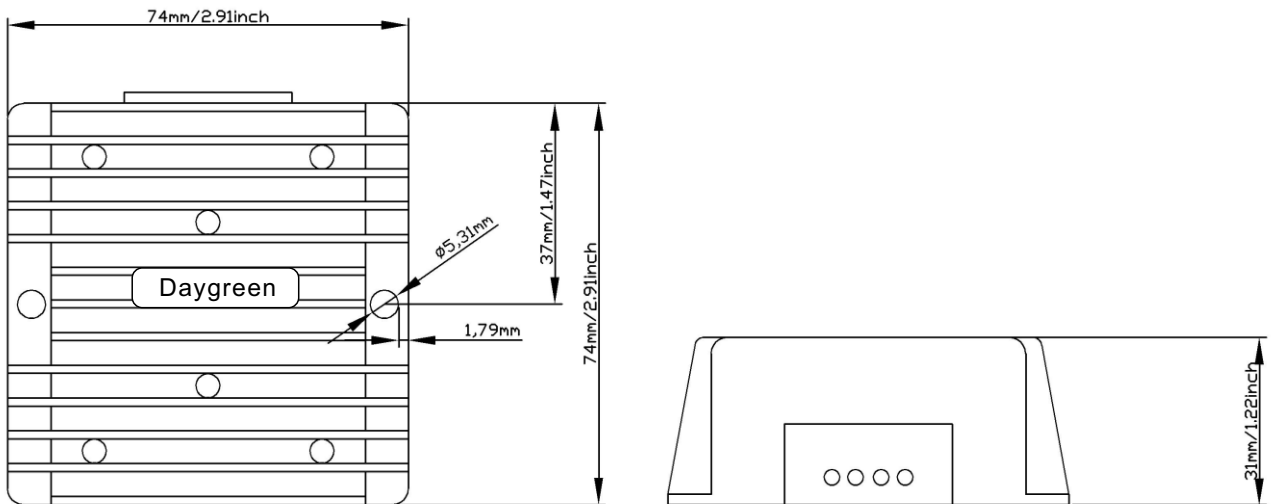

More Models



Distributed by

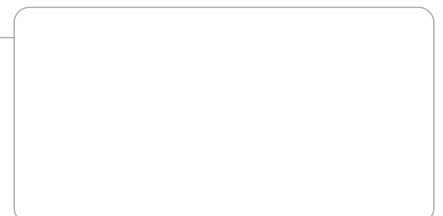

Power Conversion Solutions from 1W to 200KW