



---

# Sector150

## FPV Racing Drone

### Manual



# Contents

<b>Product Specifications.....</b>	<b>1</b>
<b>Interface Description.....</b>	<b>2</b>
<b>Check the flight control drive.....</b>	<b>3</b>
<b>Calibration accelerometer.....</b>	<b>4</b>
<b>URAT serial port use.....</b>	<b>5</b>
<b>Select aircraft model.....</b>	<b>6</b>
<b>Choose ESC protocol.....</b>	<b>7</b>
<b>Select ESC telemetry.....</b>	<b>8</b>
<b>Voltage parameters setting.....</b>	<b>9</b>
<b>Setting up the receiver.....</b>	<b>10</b>
<b>VTX serial port use. VTX uses OSD smart audio.....</b>	<b>11</b>
<b>Check receiver signal.....</b>	<b>13</b>
<b>Select flight mode startup mode.....</b>	<b>14</b>
<b>OSD settings.....</b>	<b>15</b>
<b>LED settings.....</b>	<b>16</b>
<b>Troubleshooting.....</b>	<b>17</b>

---

## Package Included


Sector150 FPV Racing Drone *1	Accessory Bag*1
-------------------------------	-----------------



# 1. Product Specifications

Product parameters	
Model	Sector150 FPV Racing Drone
Weight	219.5g
Frame Kit	Sector150 Freestyle Frame Kit
Flight Controller	Zeus35 AIO Flight Controller
ESC	35A 4in1 ESC
VTX	MT VTX mini
Camera	Caddx Ratel
Motor	1408 kv3600 (4S) 1408 KV2400 (6S)
Support receiver	SBUS .DSMX.i.BUS
Input Voltage	3-6S Lipo

## 2. Interface Description

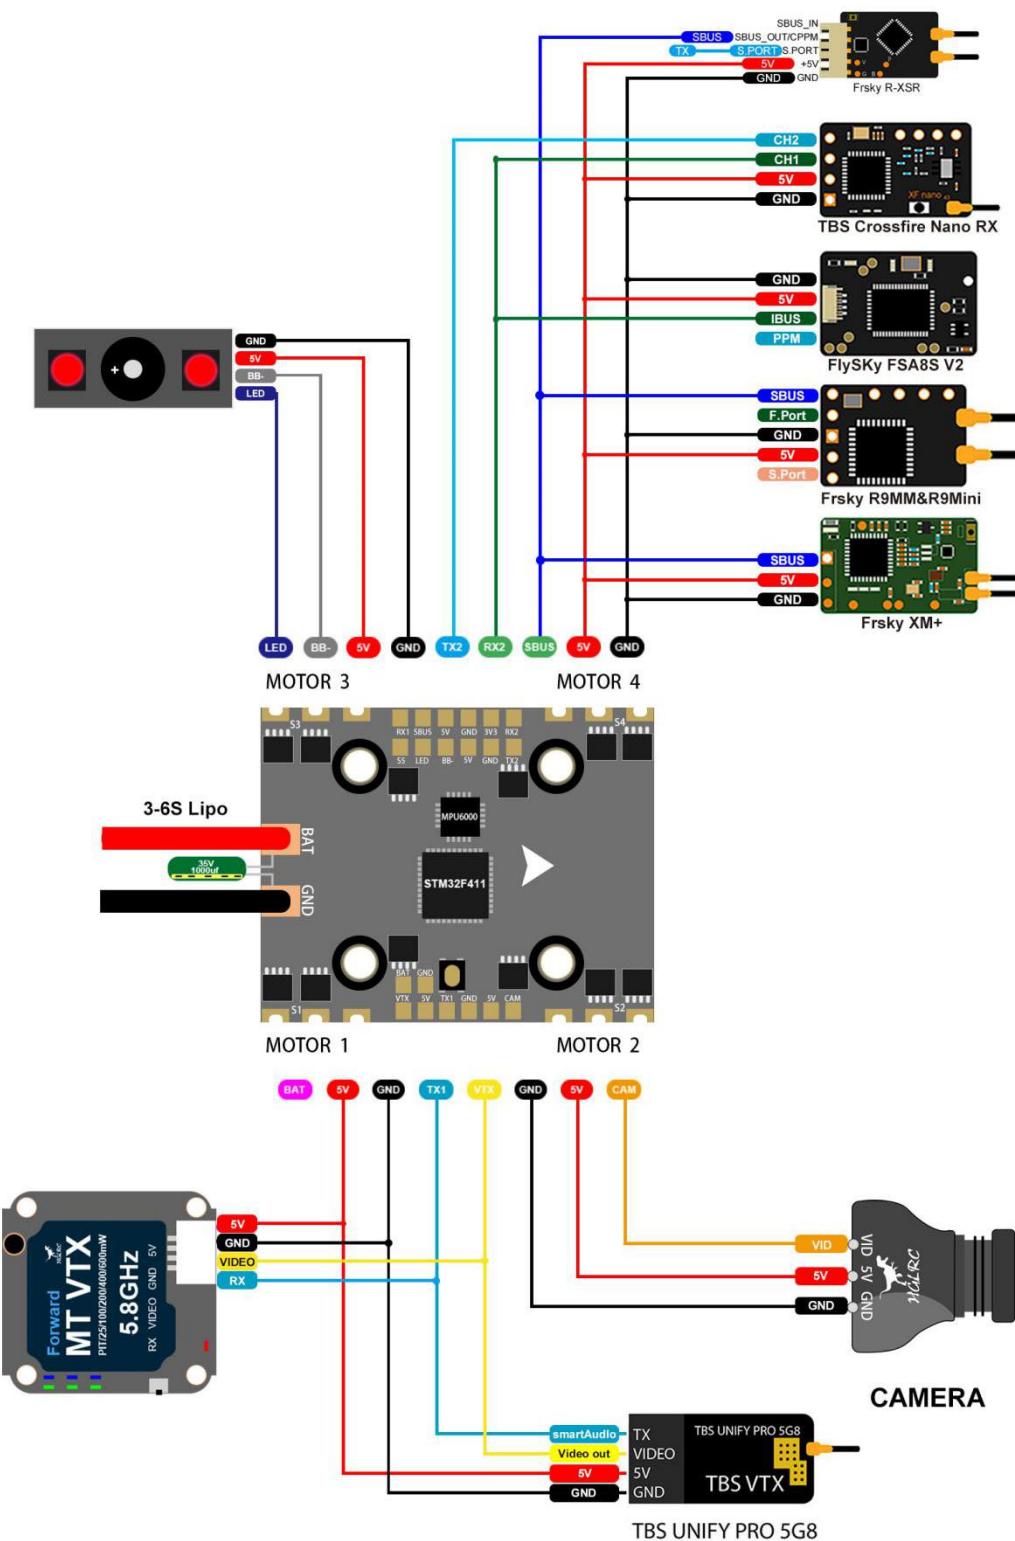



### 3.Check the flight control drive


1. Long Press BOOT buttons.connect USB.The system automatically install the driver





2.Driver cannot be installed, please download ImpulseRC\_Driver\_Fixer



3.Double-click on the run(Plug in the flight controller to automatically install the driver)

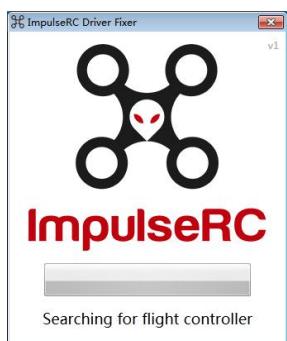

4.open betaflight configurator , enter DFU mode

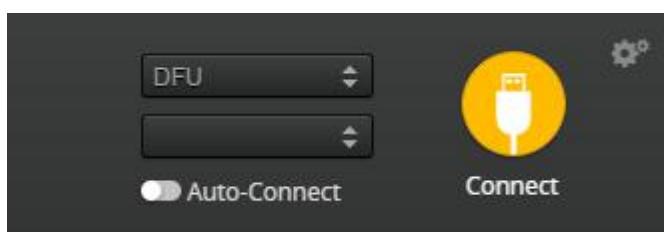



5. Click **Firmware Flasher** Select firmware version

HGLRCF411

4.2.0 - 14-06-2020 14:40

No reboot sequence

Flash on connect

Full chip erase

Manual baud rate **115200**

6. Click **Load Firmware** [Online] Load firmware. **Flash Firmware** Waiting for completion It will be prompted upon completion. **Programming: SUCCESSFUL**


7. open betaflight configurator . Controller plugged into the computer. Betaflight Automatically assigned port, click “Connect” Enter setup interface (Different computer COM)



## 4. Calibration accelerometer

1. Put the aircraft horizontal and click “Reset Z axis”

Click again Calibrate Accelerometer

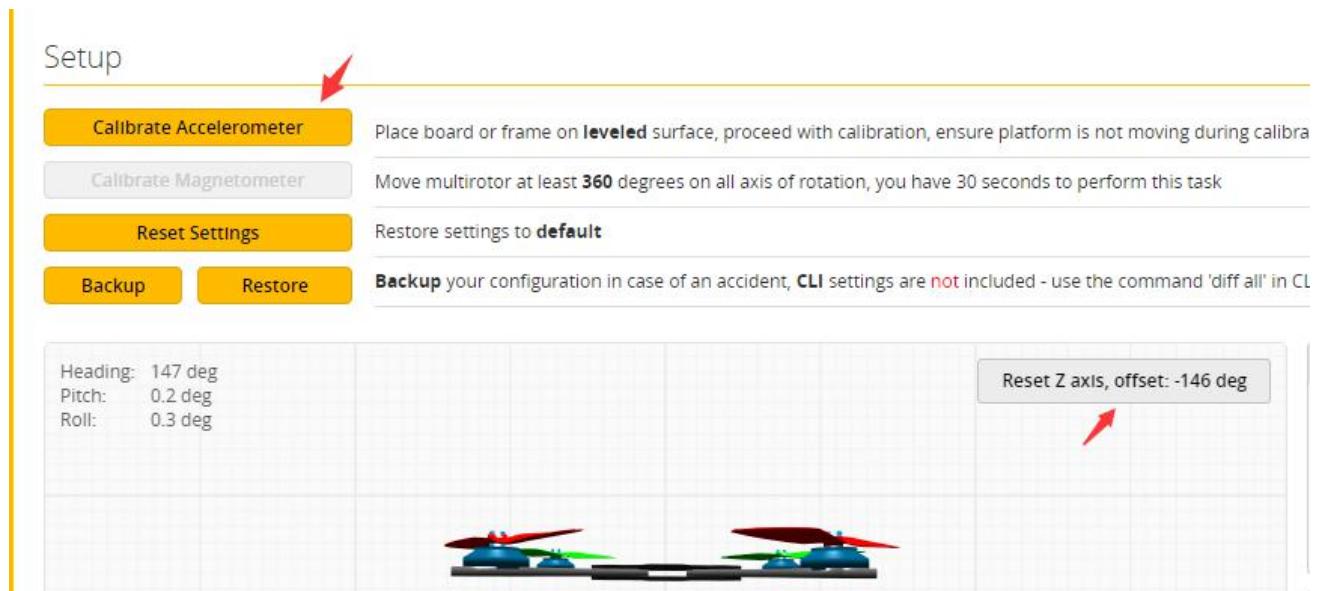


## 5. URAT serial port use

URAT1 uses VTX image transmission


UART2 uses receiver telemetry

# 6. Select aircraft model

1. Click  Configuration Select model

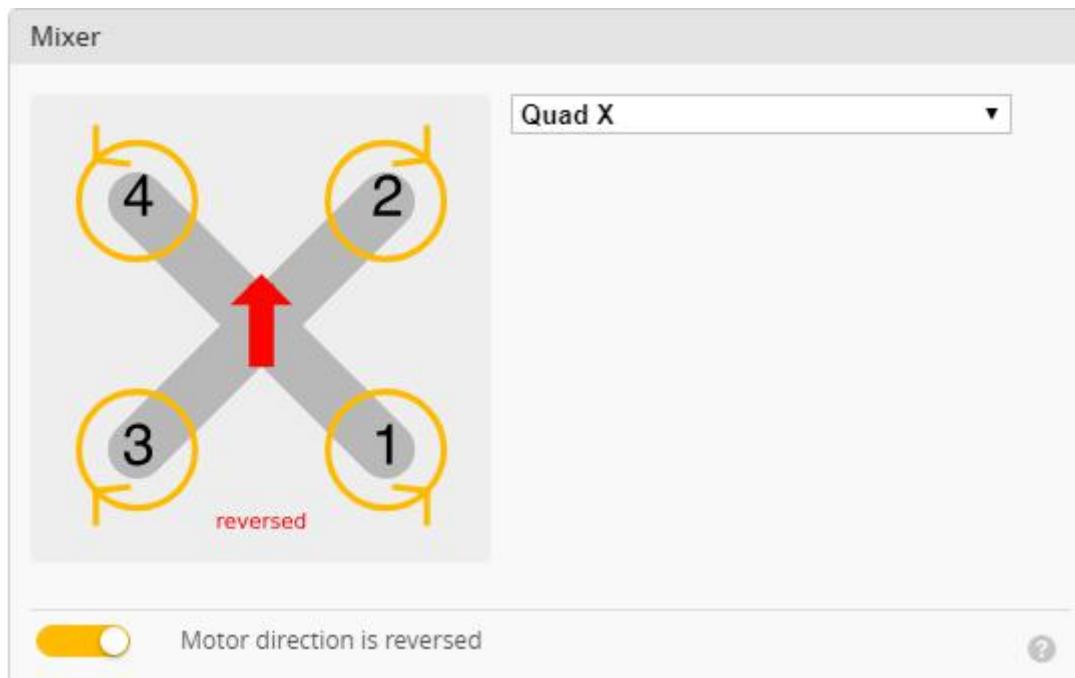

2. Click  Motors Click “I understand the risks” Push Master to check motor steering “Master” Steering can be changed at [BLHeliSuite](#)

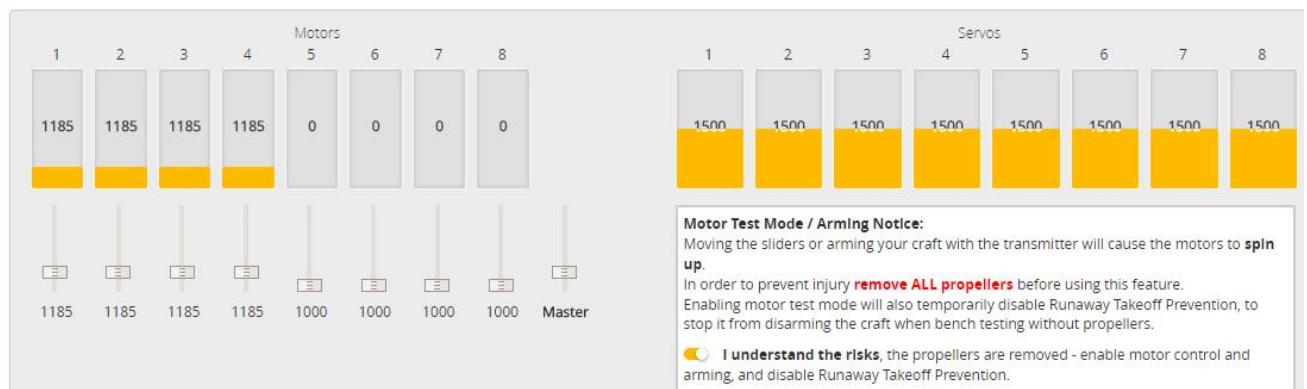

## 7.Choose ESC protocol


1.Choose the right ESC protocol, the optional universal protocol DSHOT600.

ESC/Motor Features

DSHOT600 ▾ ESC/Motor protocol

MOTOR\_STOP Don't spin the motors when armed

4.5 ▾ Motor Idle Throttle Value [percent]

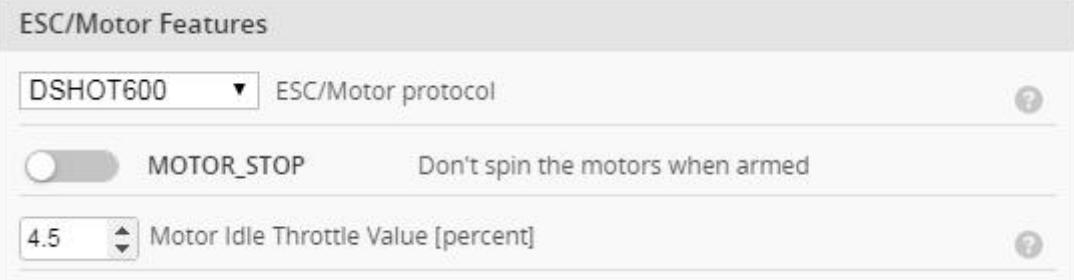

## 8.Voltage parameters setting

1.Click  Power & Battery Setting parameters

Power & Battery

Battery

Onboard ADC ▾ Voltage Meter Source


Onboard ADC ▾ Current Meter Source

3.3 ▾ Minimum Cell Voltage

4.3 ▾ Maximum Cell Voltage

3.5 ▾ Warning Cell Voltage

0 ▾ Capacity (mAh)

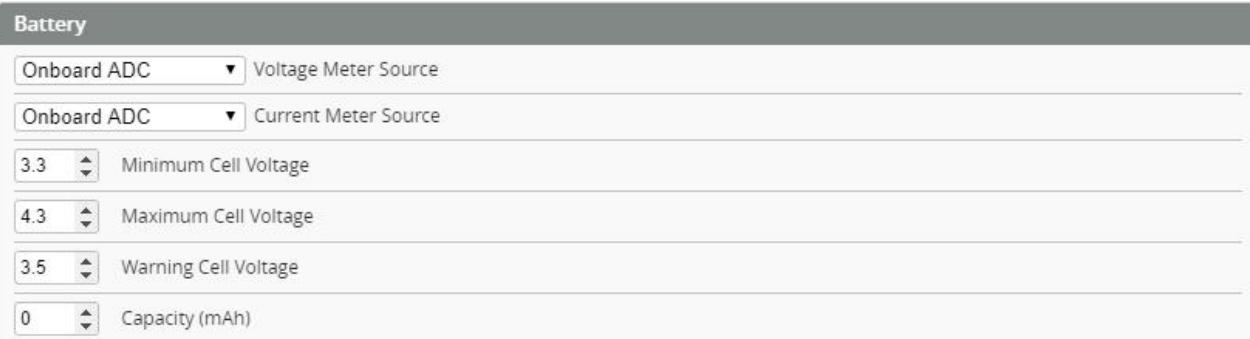

Voltage Meter

Battery	0 V	110 ▾ Scale
		10 ▾ Divider Value
		1 ▾ Multiplier Value




Amperage Meter

Battery	0.00 A	279 ▾ Scale [1/10th mV/A]
		0 ▾ Offset [mA]



# 9. Setting up the receiver

## 1. Receiver connection diagram

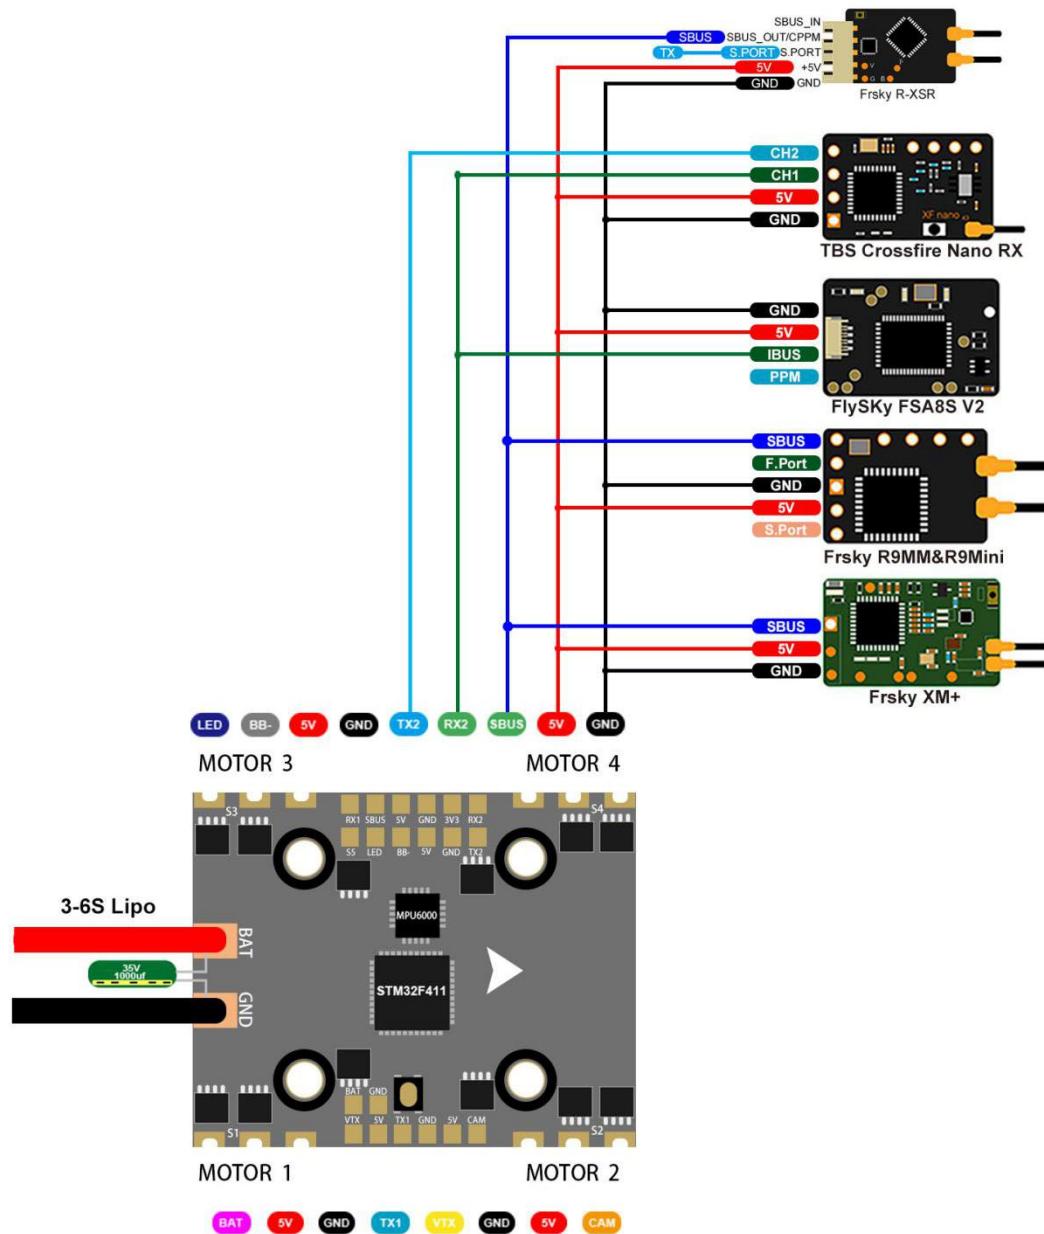

2. Click  have found “UART2” Open (SBUS) the receiver serial port

Identifier	Configuration/MSP	Serial Rx	Telemetry Output	Sensor Input	Peripherals
USB VCP	<input checked="" type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾
UART1	<input type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	VTX (IRC Tran ▾ AUTO ▾
UART2	<input type="checkbox"/> 115200 ▾	<input checked="" type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾



### 3. Open (i.BUS/DSMX) receiver serial port

Identifier	Configuration/MSP	Serial Rx	Telemetry Output	Sensor Input	Peripherals
USB VCP	<input checked="" type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾
UART1	<input type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	VTX (IRC Tran ▾ AUTO ▾
UART2	<input type="checkbox"/> 115200 ▾	<input checked="" type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾

### 4. Set the SBUS receiver

Receiver

Serial-based receiver (SPEKSAT, S ▾) Receiver Mode

**Note:** Remember to configure a Serial Port (via Ports tab) and choose a Serial Receiver Provider when using RX\_SERIAL feature.

SBUS ▾ Serial Receiver Provider

### 5. Set the i.BUS receiver

Receiver

Serial-based receiver (SPEKSAT, S ▾) Receiver Mode

**Note:** Remember to configure a Serial Port (via Ports tab) and choose a Serial Receiver Provider when using RX\_SERIAL feature.

IBUS ▾ Serial Receiver Provider

### 6. Set the DSMX receiver

Receiver


Serial-based receiver (SPEKSAT, S ▾) Receiver Mode

**Note:** Remember to configure a Serial Port (via Ports tab) and choose a Serial Receiver Provider when using RX\_SERIAL feature.

SPEKTRUM2048 ▾ Serial Receiver Provider

# 10.VTX serial port use. VTX uses OSD smart audio

## 1.VTX connection diagram

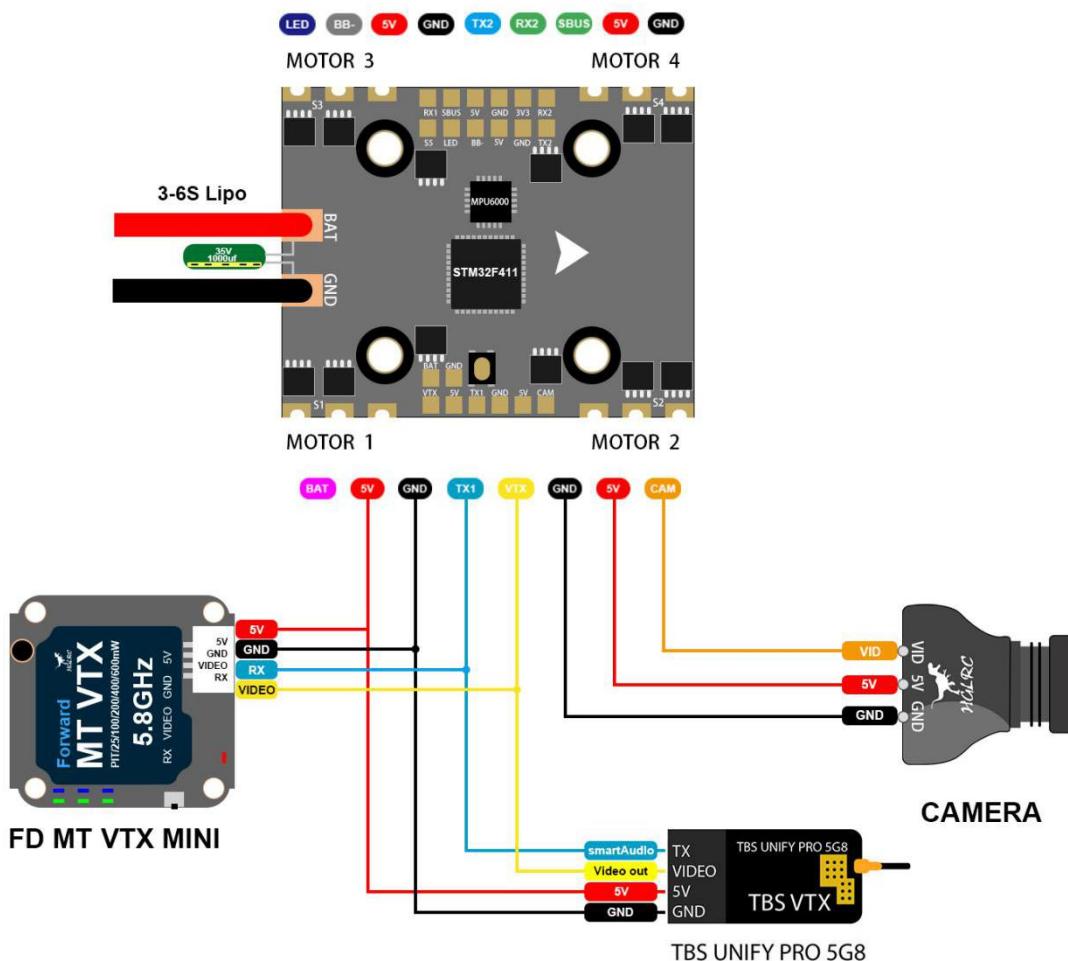


2.VTX serial port opens. The protocol is selected according to its own VTX protocol.

Identifier	Configuration/MSP	Serial Rx	Telemetry Output	Sensor Input	Peripherals
USB VCP	<input checked="" type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾
UART1	<input type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	VTX (IRC Tran ▾ AUTO ▾
UART2	<input type="checkbox"/> 115200 ▾	<input checked="" type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled Blackbox logging VTX (TBS SmartAudio) <b>VTX (IRC Tramp)</b> Camera (RunCam Protocol) Benewake LIDAR


### 3. Use OSD to adjust VTX

which displays information like battery voltage and mAh consumed while you fly. In addition, the Betaflight OSD can be used to configure the quadcopter, making in-field adjustments and tuning more convenient.

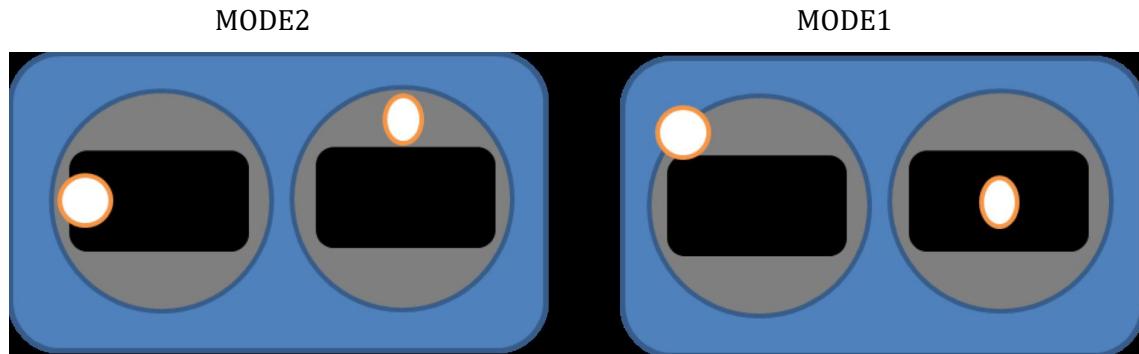

The graphics above show the stick command to bring up the OSD menu. The stick command is: throttle centered, yaw left, pitch forward. The exact stick command therefore depends on which mode your transmitter sticks are in.

In the OSD menu, use pitch up/down to move the cursor between menu items. When a menu option has a > symbol to the right of it, this indicates that it contains a sub-menu. Roll-right will enter the sub-menu. For example, in the screen to the right, moving the cursor to “Features” and then moving the roll stick to the right will enter the “Features” sub-menu.

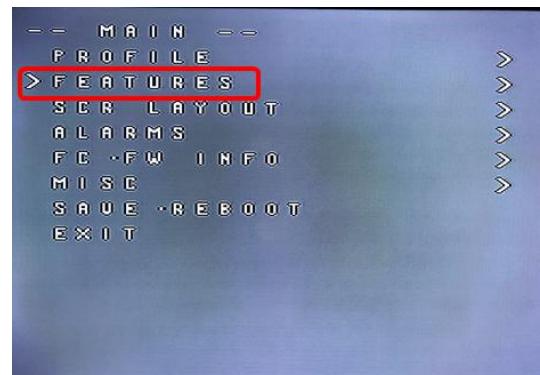


If you are using a video transmitter that supports remote configuration, enter the “Features” menu to configure the vTX. From there, enter either “VTX SA” if you are using SmartAudio (TBS Unify) or “VTX TR” if you are using IRC Tramp Telemetry.

To adjust PIDs, rates, and other tuning-related parameters, enter the “Profile” sub-menu.


In the “Scr Layout” sub-menu, you can move the OSD elements (like battery voltage, mAh, and so forth) around on the screen.

The “Alarms” sub-menu lets you control when the OSD will try to alert you that battery voltage is too low or mAh consumed is too high.

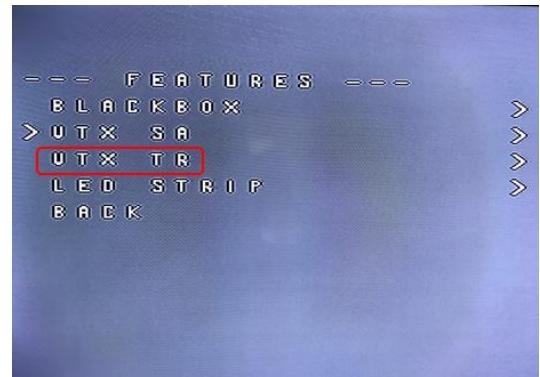


When a parameter can be modified, the parameter's current value will be shown on the right-hand side of the screen. In this case, roll left/right will adjust the parameter up and down.

The screen to the right shows the current vTX settings. From here, you can change the frequency band, channel, and power level of the video transmitter. After making the changes, move the cursor to "Set" and press roll-right to confirm the settings.

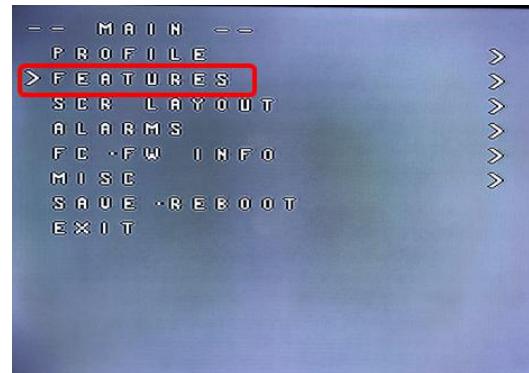


## 11. Check receiver signal

1. Click  Receiver Check the remote control output signal

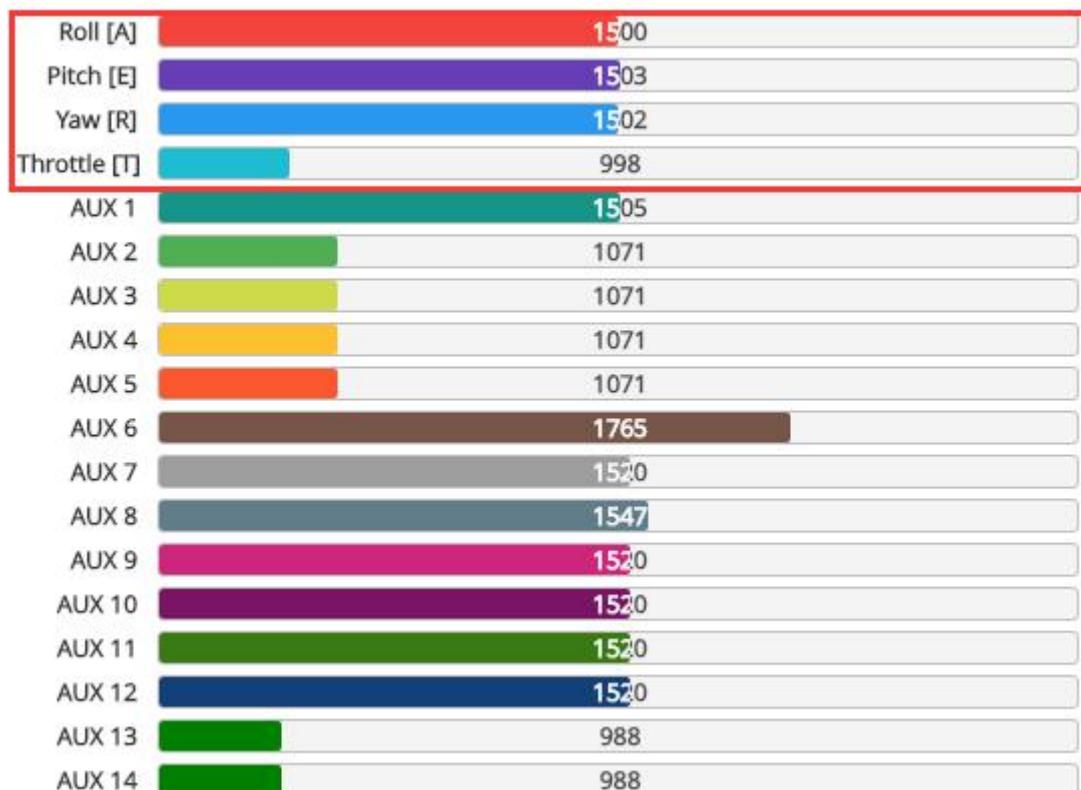

# 12.Select flight mode startup mode

- Click  Modes set up the function of remote control switch across the channel (below are for reference only)

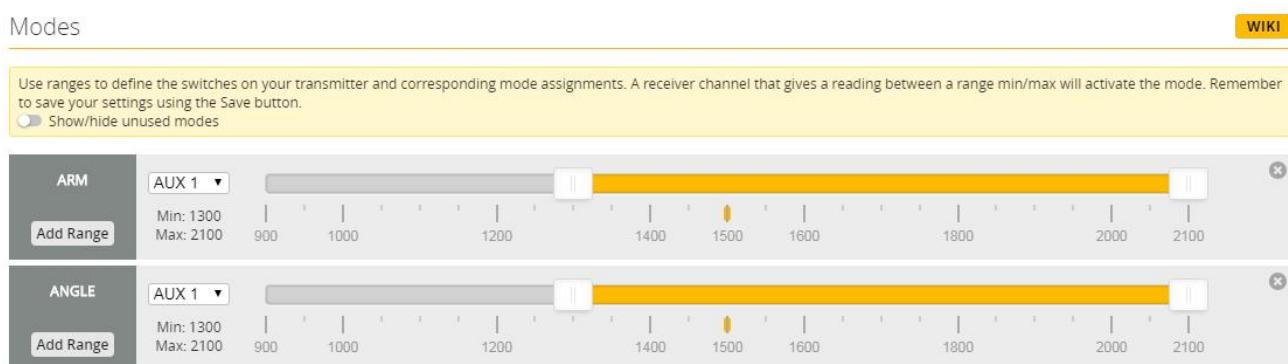

# 13.OSD settings

- Click  OSD the OSD Settings, according to the need to choose, drag the OSD schematic diagram of the parameters can be adjusted.




# 14.LED settings

1. Click  Configuration Turn on LED support



2. Click  LED Strip .Click  Wire Ordering Mode set according to need

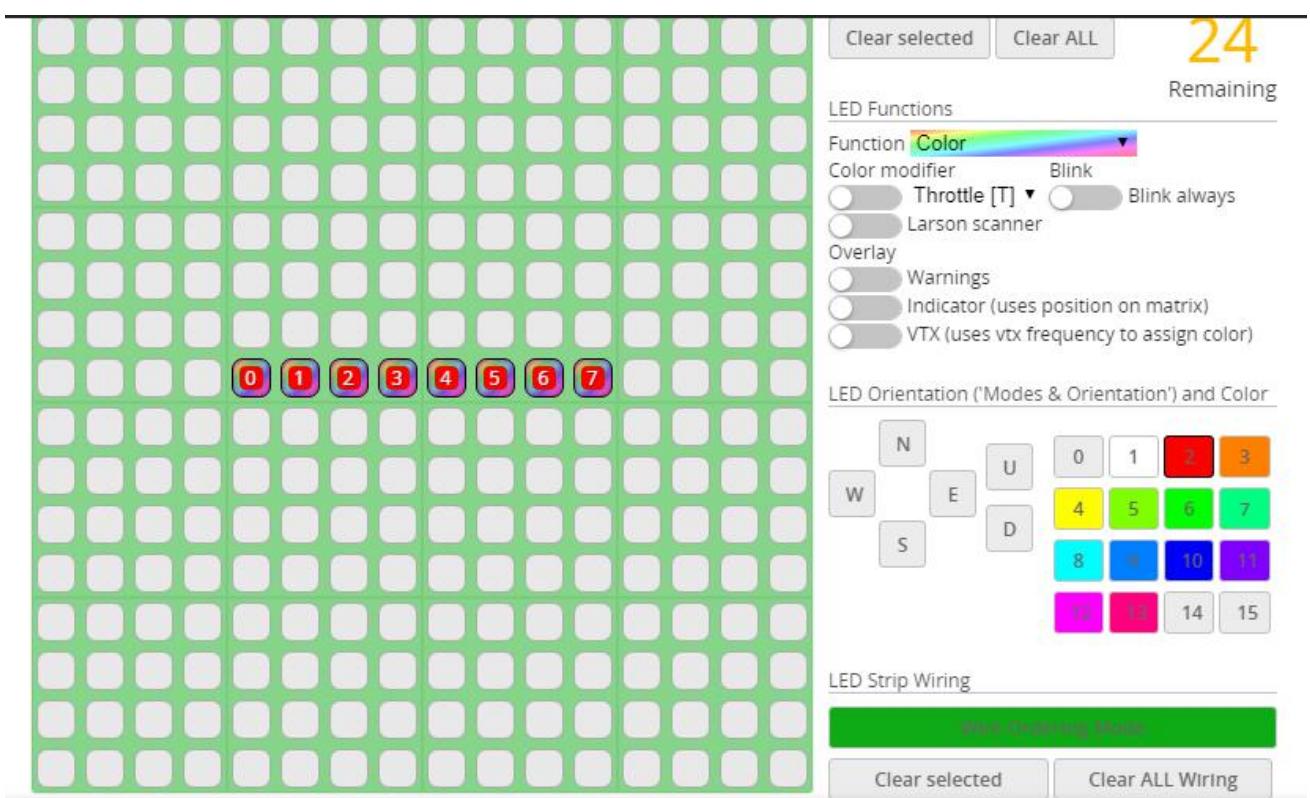

---

# 15.Troubleshooting

## Warning:

Please read the cautions as follows, otherwise stability of your flight controller cannot be ensured, your flight controller will even get damaged.

- Keep focus on the polarity. Check carefully before power supply.
- Cut off the power when you connect, plug and pull anything.
- The refresh rate of PID and Gyroscope is up to 4K/4K.

## after sales question:

1. After receiving the goods, it is found that the product can not be used normally. If the return to the factory is a quality problem, the repair service will be provided free of charge.
2. If the product is damaged due to improper operation, the repair service may be provided under the condition that the inspection can be repaired.
3. For domestic customers, please contact the after-sales service personnel. For overseas customers, please contact the official website for after-sales service.



---

# Product daily problems

## 1.OSD garbled:

If you find garbled characters, please open Betaflight, click “**OSD**” .and click “**Font Manager**” clicks on “**Upload Font**” to update

1. When plugged in the battery, the aircraft does not pass the self-test without "BBB" sound. There is only one sound.

Please check if the ESC agreement is correct

## 3.The spin of the aircraft keeps spinning

1. Please check if the propeller is correct
2. Please check if the motor direction is correct