

Model:PE4110C-I

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,Primary voltage:
110V/220V/230V,or producing as customized.

Technical Index:

Technical Index: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C~+70°C


Work frequency: 50Hz~60Hz

Dielectric strength: 3.75KV 50Hz 1min


Technical Parameters table:

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤30	%
Power	3	VA
Temperature rising	≤18	°C
No load loss	≤0.3	W
weight	130	g

Dimension (in mm) :

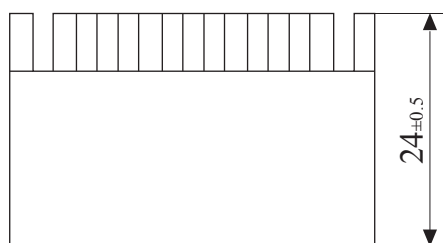

Front View

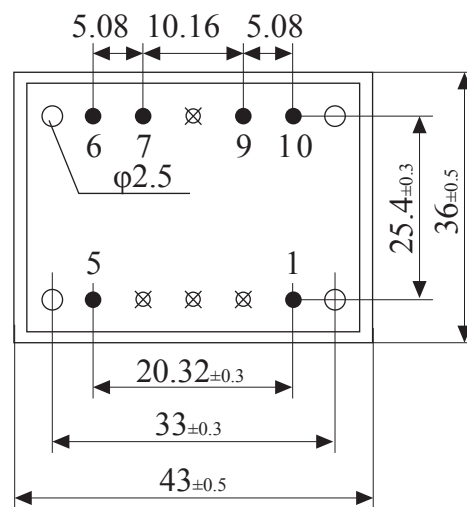

Bottom View



Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	8.1V	8.1V×2	416mA	208mA×2
7.5V	7.5V×2	10.7V	10.7V×2	333mA	166.5mA×2
9V	9V×2	12.8V	12.8V×2	277mA	138.5mA×2
12V	12V×2	17.1V	17.1V×2	208mA	104mA×2
15V	15V×2	21V	21V×2	166mA	83mA×2
18V	18V×2	25.7V	25.7V×2	138mA	69mA×2
24V	24V×2	34.2V	34.2V×2	104mA	52mA×2

Schematic Diagram:

