

PE series PCB safety isolation transformer



Model:PE4121-I

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,Primary voltage:
110V/220V/230V,or producing as customerized.



Technical Index:

Technical Index: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C~+40°C

Work frequency: 50Hz~60Hz


Dielectric strength: 3.75KV 50Hz 1min

Technical Parameters table:

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤19	%
Power	8	VA
Temperature rising	≤22	°C
No load loss	≤0.6	W
weight	245	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.2V	7.2V×2	1333mA	666.5mA×2
7.5V	7.5V×2	9V	9V×2	1066mA	533mA×2
9V	9V×2	11.2V	11.2V×2	888mA	444mA×2
12V	12V×2	14.4V	14.4V×2	666mA	333mA×2
15V	15V×2	18V	18V×2	533mA	266.5mA×2
18V	18V×2	22.2V	22.2V×2	444mA	222mA×2
24V	24V×2	28.9V	28.9V×2	333mA	166.5mA×2

Schematic Diagram:

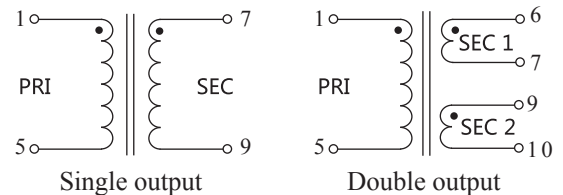

Dimension (in mm) :

