

Rogowski coil also called differential current sensor, it is a "hollow" circular coil, arranged around the conductor, so that an alternating magnetic field generated by the current induces a voltage in the coil. The coil is actually a transformer coupled to the conductor under test, and the voltage directly output from the coil is proportional to the rate of change of current, e.g. @50Hz/1kA $V_{out}=85mV$, @60Hz/1kA $V_{out}=85*60/50=102mV$. If you want to obtain the current waveform or current value that doesn't matter to frequency also need to add the integral circuit to achieve 90° phase shift compensation and frequency equalization.

RF series is a flexible current sensor based on Rogowski coil principle, which is in small size, light weight and easy to install and offers a choice of different sizes, which can also be customized design of the customer requires a special order. It has no magnetic saturation and a shielding layer to resist the influence of external magnetic field, so stable measurements can be achieved in the range of low current to hundreds of kA. The flexible rogowski coil is an extremely comfortable solution for current measurement, particularly suited to current monitoring and electrical retrofitting, can be used in many cases where a traditional current transformer (CT) is not available, or can replace it.


We provide 4-20mA, 0-5V, 0-1A, 333mV and other integrators suitable for more usage scenarios

Features

- Light, flexible and easy to install
- Bandwidth range widely
- No hysteresis lag, no saturation
- The secondary open circuit no danger
- Excellent linearity
- Multiple sizes can be customized

Application

- Measuring instrument, laboratory instrument
- Power monitoring system
- DC ripple measurement
- Harmonic and transient monitoring
- Power meter, power analyzer sensor

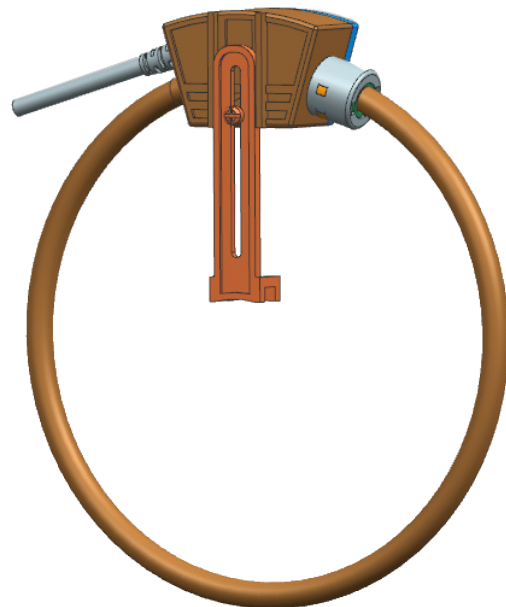

Specification

Model	RFSZ-80-85	RFSZ-105-85	RFSZ-150-85	RFSZ-180-85	RFSZ-240-85	RFSZ-300-85
Coil Length	293mm	363mm	493mm	593mm	723mm	943mm
Window Diameter Size	80mm	105mm	150mm	180mm	240mm	300mm
Weight	100-180g					
Coil resistance	150-650Ω					
Rated current	500-6000A					
Accuracy	<0.5% 25°C					
Positioning error	±1%					
Output Voltage	75mV/kA@50Hz 90mV/kA@60Hz					
Frequency Range	10Hz to 20kHz					
Linearity	±0.2%					
Phase Shift	≤0.5°					
Connection cable Type	LIYCY(TP) Double shield 2 x 0.25 mm + shield					
Connection cable	Normal 200cm (as required)					
Operating temperature	from -30°C to +80°C					
Storage temperature	from -40°C to +80°C					
Working voltage	1000 VRMS CAT III 600 VRMS CAT IV					
Test voltage	7400 VRMS / 1 min					
Material	Thermoplastic rubber UL94-V0					
Protection degree	IP67					

Dimensions

