

TA4020FP Through core type precision current transformer **YHDC** 1992[®]

Characteristics:

Epoxy potting, silicon steel core, small size, fully enclosed, electrical load remote monitoring, as the input signal of the electronic control system, phase loss indication, electricity measurement, motor running state monitoring.

Technical index:

Mounting type: Plate installation
 Material of the core: Silicon steel sheet
 Flame resistance: UL94-V0
 Execution standard: GB20840-2014
 Operating temperature: -20°C ~ +70°C
 Storage temperature: -30°C ~ +80°C
 Frequency range: 50Hz-60Hz
 Dielectric strength: 3.5KV 50Hz 1min


Product picture : (the printed words are for reference only, subject to the actual product)



Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Model	TA4020FP			Unit
Rated input	200	300	300	A
Rated output	200	150	100	mA
Turns ratio	1: 1000	1: 2000	1: 3000	
Linearity	≤ 0.5	≤ 0.5	≤ 0.5	%
Sampling resistance	10	15	20	Ω
Weight	84			g

Schematic diagram:

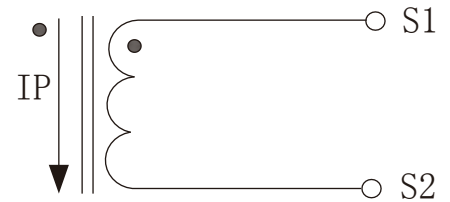

current output type.
 the secondary is not allowed to open.

Dimensions (in mm ± 0.5) :

