

TA8348S-250 Through core type precision current transformer **YHDC**® 1992


Characteristics:

Epoxy potting, silicon steel core, small size, fully enclosed, electrical load remote monitoring, as the input signal of the electronic control system, phase loss indication, electricity measurement, motor running state monitoring.

Technical index:

- Mounting type: PCB
- Material of the core: silicon steel
- Flame resistance: UL94-V0
- Execution standard: GB20840-2014
- Operating temperature: -20°C ~ +70°C
- Storage temperature: -30°C ~ +80°C
- Frequency range: 50Hz-60Hz
- Dielectric strength: 3.5KV 50Hz 1min


Product picture : (the printed words are for reference only, subject to the actual product)

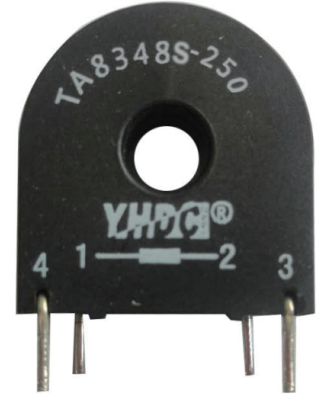

Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Model	TA8348S-250	Unit
Rated input	20	A
Rated output	8	mA
Turns ratio	1: 2500	
Linearity	≤ 0.5	%
Sampling resistance	500	Ω
Weight	14	g

Schematic diagram:

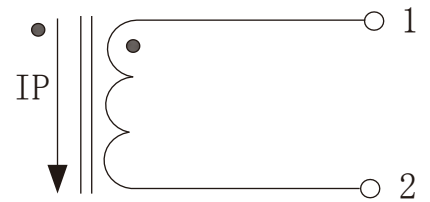

current output type.
the secondary is not allowed to open.

Dimensions (in mm ± 0.5) :

